

---

**CX***Oracle*  
**Release 7.3.0**

**June 26, 2020**



<b>1</b>	<b>User Guide</b>	<b>3</b>
1.1	Introduction to cx_Oracle	3
1.1.1	Architecture	3
1.1.2	Features	4
1.1.3	Getting Started	4
1.2	cx_Oracle 7 Installation	5
1.2.1	Overview	5
1.2.2	Quick Start cx_Oracle Installation	5
1.2.3	Oracle Client and Oracle Database Interoperability	7
1.2.4	Installing cx_Oracle on Linux	7
1.2.5	Installing cx_Oracle RPMs on Oracle Linux	10
1.2.6	Installing cx_Oracle on Windows	10
1.2.7	Installing cx_Oracle on macOS	11
1.2.8	Installing cx_Oracle without Internet Access	12
1.2.9	Install Using GitHub	13
1.2.10	Install Using Source from PyPI	13
1.2.11	Upgrading from Older Versions	13
1.2.12	Installing cx_Oracle 5.3	13
1.2.13	Troubleshooting	14
1.3	Connecting to Oracle Database	14
1.3.1	Establishing Database Connections	15
1.3.2	Closing Connections	15
1.3.3	Oracle Environment Variables	15
1.3.4	Optional Oracle Configuration Files	16
1.3.5	Connection Strings	17
1.3.6	Connection Pooling	19
1.3.7	Database Resident Connection Pooling (DRCP)	23
1.3.8	Connecting Using Proxy Authentication	27
1.3.9	Connecting Using External Authentication	28
1.3.10	Privileged Connections	31
1.3.11	Starting and Stopping Oracle Database	31
1.3.12	Securely Encrypting Network Traffic to Oracle Database	32
1.3.13	Resetting Passwords	32
1.3.14	Connecting to Autononomous Databases	33
1.3.15	Connecting to Sharded Databases	34
1.4	SQL Execution	35

1.4.1	SQL Queries . . . . .	35
1.4.2	INSERT and UPDATE Statements . . . . .	44
1.5	PL/SQL Execution . . . . .	44
1.5.1	PL/SQL Stored Procedures . . . . .	44
1.5.2	PL/SQL Stored Functions . . . . .	45
1.5.3	Anonymous PL/SQL Blocks . . . . .	46
1.5.4	Using DBMS_OUTPUT . . . . .	46
1.5.5	Implicit results . . . . .	47
1.5.6	Edition-Based Redefinition (EBR) . . . . .	47
1.6	Using Bind Variables . . . . .	49
1.6.1	Binding By Name or Position . . . . .	49
1.6.2	Bind Direction . . . . .	50
1.6.3	Binding Null Values . . . . .	51
1.6.4	Binding ROWID Values . . . . .	51
1.6.5	DML RETURNING Bind Variables . . . . .	51
1.6.6	LOB Bind Variables . . . . .	52
1.6.7	REF CURSOR Bind Variables . . . . .	52
1.6.8	Binding PL/SQL Collections . . . . .	53
1.6.9	Binding PL/SQL Records . . . . .	57
1.6.10	Binding Spatial Datatypes . . . . .	58
1.6.11	Changing Bind Data Types using an Input Type Handler . . . . .	58
1.6.12	Binding Multiple Values to a SQL WHERE IN Clause . . . . .	59
1.6.13	Binding Column and Table Names . . . . .	60
1.7	Using CLOB and BLOB Data . . . . .	60
1.7.1	Simple Insertion of LOBs . . . . .	61
1.7.2	Fetching LOBs as Strings and Bytes . . . . .	61
1.7.3	Streaming LOBs (Read) . . . . .	62
1.7.4	Streaming LOBs (Write) . . . . .	63
1.7.5	Temporary LOBs . . . . .	63
1.8	Working with the JSON Data Type . . . . .	63
1.9	Simple Oracle Document Access (SODA) . . . . .	64
1.9.1	Overview . . . . .	64
1.9.2	SODA Example . . . . .	65
1.10	Working with XMLTYPE . . . . .	66
1.11	Batch Statement Execution and Bulk Loading . . . . .	67
1.11.1	Batch Execution of SQL . . . . .	67
1.11.2	Batch Execution of PL/SQL . . . . .	67
1.11.3	Handling Data Errors . . . . .	68
1.11.4	Identifying Affected Rows . . . . .	68
1.11.5	DML RETURNING . . . . .	69
1.11.6	Predefining Memory Areas . . . . .	69
1.11.7	Loading CSV Files into Oracle Database . . . . .	70
1.12	Exception Handling . . . . .	71
1.13	Oracle Advanced Queuing (AQ) . . . . .	71
1.13.1	Creating a Queue . . . . .	71
1.13.2	Enqueuing Messages . . . . .	72
1.13.3	Dequeuing Messages . . . . .	72
1.13.4	Using Object Queues . . . . .	72
1.13.5	Changing Queue and Message Options . . . . .	73
1.13.6	Bulk Enqueue and Dequeue . . . . .	73
1.14	Continuous Query Notification (CQN) . . . . .	74
1.14.1	Requirements . . . . .	74
1.14.2	Creating a Subscription . . . . .	75
1.14.3	Registering Queries . . . . .	75

1.15	Transaction Management . . . . .	76
1.15.1	Autocommitting . . . . .	76
1.15.2	Explicit Transactions . . . . .	77
1.16	Characters Sets and National Language Support (NLS) . . . . .	77
1.16.1	Setting the Client Character Set . . . . .	77
1.16.2	Character Set Example . . . . .	78
1.16.3	Finding the Database and Client Character Set . . . . .	79
1.17	High Availability with cx_Oracle . . . . .	79
1.17.1	General HA Recommendations . . . . .	79
1.17.2	Network Configuration . . . . .	80
1.17.3	Fast Application Notification (FAN) . . . . .	80
1.17.4	Application Continuity (AC) . . . . .	80
1.17.5	Transaction Guard . . . . .	81
1.18	Tracing SQL and PL/SQL Statements . . . . .	82
1.18.1	Subclass Connections . . . . .	82
1.18.2	Oracle Database End-to-End Tracing . . . . .	83
1.18.3	Low Level SQL Tracing in cx_Oracle . . . . .	83
<b>2</b>	<b>API Manual</b>	<b>85</b>
2.1	Module Interface . . . . .	85
2.1.1	Constants . . . . .	88
2.1.2	Types . . . . .	95
2.1.3	Exceptions . . . . .	98
2.1.4	Exception handling . . . . .	98
2.2	Connection Object . . . . .	99
2.3	Cursor Object . . . . .	108
2.4	Variable Objects . . . . .	114
2.5	SessionPool Object . . . . .	115
2.6	Subscription Object . . . . .	117
2.6.1	Message Objects . . . . .	118
2.6.2	Message Table Objects . . . . .	119
2.6.3	Message Row Objects . . . . .	119
2.6.4	Message Query Objects . . . . .	120
2.7	LOB Objects . . . . .	120
2.8	Object Type Objects . . . . .	121
2.8.1	Object Objects . . . . .	122
2.9	Advanced Queuing (AQ) . . . . .	123
2.9.1	Queues . . . . .	123
2.9.2	Dequeue Options . . . . .	123
2.9.3	Enqueue Options . . . . .	124
2.9.4	Message Properties . . . . .	125
2.10	SODA . . . . .	126
2.10.1	SODA Database Object . . . . .	126
2.10.2	SODA Collection Object . . . . .	127
2.10.3	SODA Document Object . . . . .	128
2.10.4	SODA Document Cursor Object . . . . .	129
2.10.5	SODA Operation Object . . . . .	130
<b>3</b>	<b>Indices and tables</b>	<b>133</b>
	<b>Python Module Index</b>	<b>135</b>
	<b>Index</b>	<b>137</b>



**cx\_Oracle** is a module that enables access to Oracle Database and conforms to the Python database API specification. This module is currently tested against Oracle Client 19c, 18c, 12c, and 11.2, and Python 2.7, 3.5, 3.6, 3.7 and 3.8.

**cx\_Oracle** is distributed under an open-source license (the BSD license). A detailed description of cx\_Oracle changes can be found in the release notes.

Contents:





## 1.1 Introduction to cx\_Oracle

cx\_Oracle is a Python extension module that enables Python access to Oracle Database. It conforms to the [Python Database API v2.0 Specification](#) with a considerable number of additions and a couple of exclusions.

### 1.1.1 Architecture

Python programs call cx\_Oracle functions. Internally cx\_Oracle dynamically loads Oracle Client libraries to access Oracle Database.

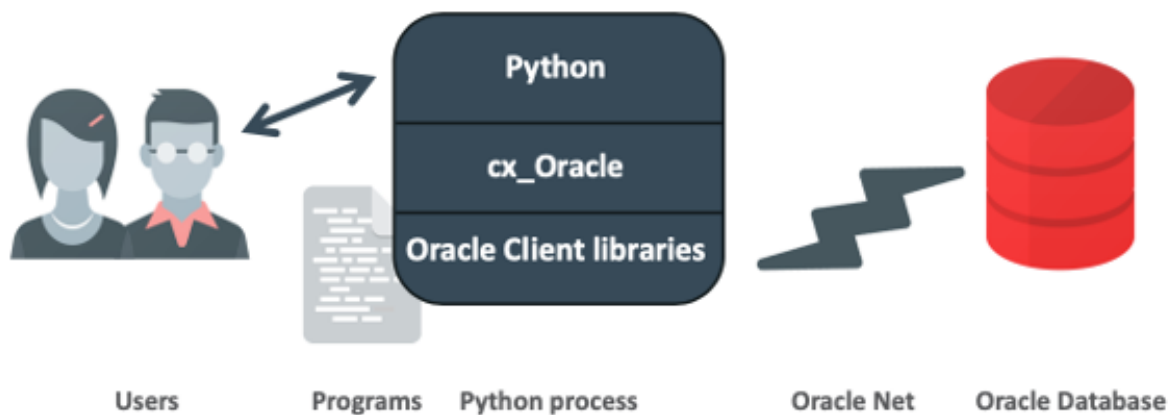


Fig. 1.1: cx\_Oracle Architecture

cx\_Oracle is typically installed from [PyPI](#) using [pip](#). The Oracle Client libraries need to be installed separately. The

libraries can be obtained from an installation of [Oracle Instant Client](#), from a full Oracle Client installation, or even from an Oracle Database installation (if Python is running on the same machine as the database).

Some behaviors of the Oracle Client libraries can optionally be configured with an `oraaccess.xml` file, for example to enable auto-tuning of a statement cache. See [Optional Oracle Client Configuration Files](#).

The Oracle Net layer can optionally be configured with files such as `tnsnames.ora` and `sqlnet.ora`, for example to enable [network encryption](#). See [Optional Oracle Net Configuration Files](#).

Oracle environment variables that are set before `cx_Oracle` first creates a database connection will affect `cx_Oracle` behavior. Optional variables include `NLS_LANG`, `NLS_DATE_FORMAT` and `TNS_ADMIN`. See [Oracle Environment Variables](#).

## 1.1.2 Features

The `cx_Oracle` feature highlights are:

- Easily installed from PyPI
- Support for Python 2 and 3, and for multiple Oracle Database versions
- Execution of SQL and PL/SQL statements
- Extensive Oracle data type support, including large objects (CLOB and BLOB) and binding of SQL objects
- Connection management, including connection pooling
- Oracle Database High Availability features
- Full use of Oracle Network Service infrastructure, including encrypted network traffic and security features

A complete list of supported features can be seen [here](#).

## 1.1.3 Getting Started

Install `cx_Oracle` using the [installation](#) steps.

Create a script `query.py` as shown below:

```
# query.py

from __future__ import print_function
import cx_Oracle

# Establish the database connection
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1")

# Obtain a cursor
cursor = connection.cursor()

# Data for binding
managerId = 145
firstName = "Peter"

# Execute the query
sql = """SELECT first_name, last_name
        FROM employees
        WHERE manager_id = :mid AND first_name = :fn"""
cursor.execute(sql, mid = managerId, fn = firstName)
```

(continues on next page)

(continued from previous page)

```
# Loop over the result set
for row in cursor:
    print(row)
```

This uses Oracle's [sample HR schema](#).

Simple [connection](#) to the database requires a username, password and connection string. Locate your Oracle Database [user name and password](#) and the database [connection string](#), and use them in `query.py`. For `cx_Oracle` the connection string is commonly of the format `hostname/service_name`, using the host name where the database is running and the Oracle Database service name of the database instance.

The [cursor](#) is the object that allows statements to be executed and results (if any) fetched.

The data values in `managerId` and `firstName` are 'bound' to the statement placeholder 'bind variables' `:mid` and `:fn` when the statement is executed. This separates the statement text from the data, which helps avoid SQL Injection security risks. [Binding](#) is also important for performance and scalability.

The cursor allows rows to be iterated over and displayed.

Run the script:

```
python query.py
```

The output is:

```
('Peter', 'Hall')
('Peter', 'Tucker')
```

Example `cx_Oracle` scripts and a tutorial are in the [GitHub samples directory](#).

## 1.2 cx\_Oracle 7 Installation

### 1.2.1 Overview

To use `cx_Oracle 7` with Python and Oracle Database you need:

- Python 2.7 or 3.5 and higher. Older versions of `cx_Oracle` may work with older versions of Python.
- Oracle client libraries. These can be from the free [Oracle Instant Client](#), or those included in Oracle Database if Python is on the same machine as the database. Oracle client libraries versions 19, 18, 12, and 11.2 are supported on Linux, Windows and macOS. Users have also reported success with other platforms.
- An Oracle Database. Oracle's standard client-server version interoperability allows `cx_Oracle` to connect to both older and newer databases.

If you are upgrading, review the release notes.

### 1.2.2 Quick Start cx\_Oracle Installation

- An installation of [Python](#) is needed. Python 2.7 and Python 3.5 and higher are supported by `cx_Oracle 7`.
- Install `cx_Oracle` from [PyPI](#) with:

```
python -m pip install cx_Oracle --upgrade
```

Note: if a binary wheel package is not available for your platform, the source package will be downloaded instead. This will be compiled and the resulting binary installed.

If you are behind a proxy, specify your proxy server:

```
python -m pip install cx_Oracle --proxy=http://proxy.example.com:80 --upgrade
```

- Add Oracle 19, 18, 12 or 11.2 client libraries to your operating system library search path such as PATH on Windows or LD\_LIBRARY\_PATH on Linux. On macOS move the files to ~/lib or /usr/local/lib.

- If your database is on a remote computer, then download and unzip the client libraries from the free [Oracle Instant Client](#) “Basic” or “Basic Light” package for your operating system architecture.

Instant Client on Windows requires an appropriate [Microsoft Windows Redistributables](#). On Linux, the libaio (sometimes called libaio1) package is needed.

- Alternatively use the client libraries already available in a locally installed database such as the free [Oracle XE](#) release.

Version 19, 18 and 12.2 client libraries can connect to Oracle Database 11.2 or greater. Version 12.1 client libraries can connect to Oracle Database 10.2 or greater. Version 11.2 client libraries can connect to Oracle Database 9.2 or greater.

The database abstraction layer in cx\_Oracle is [ODPI-C](#), which means that the [ODPI-C installation instructions](#) can be useful to review.

- Create a script like the one below:

```
# myscript.py

from __future__ import print_function

import cx_Oracle

# Connect as user "hr" with password "welcome" to the "orclpdb1" service running_
↪ on this computer.
connection = cx_Oracle.connect("hr", "welcome", "localhost/orclpdb1")

cursor = connection.cursor()
cursor.execute("""
    SELECT first_name, last_name
    FROM employees
    WHERE department_id = :did AND employee_id > :eid""",
    did = 50,
    eid = 190)
for fname, lname in cursor:
    print("Values:", fname, lname)
```

Locate your Oracle Database username and password, and the database connection string. The connection string is commonly of the format hostname/servicename, using the hostname where the database is running, and the service name of the Oracle Database instance.

Substitute your username, password and connection string in the code. Run the Python script, for example:

```
python myscript.py
```

You can learn how to use cx\_Oracle from the [API documentation](#) and [samples](#).

If you run into installation trouble, check out the section on [Troubleshooting](#).

### 1.2.3 Oracle Client and Oracle Database Interoperability

cx\_Oracle requires Oracle Client libraries. The libraries provide the necessary network connectivity to access an Oracle Database instance. They also provide basic and advanced connection management and data features to cx\_Oracle.

The simplest way to get Oracle Client libraries is to install the free [Oracle Instant Client](#) “Basic” or “Basic Light” package. The libraries are also available in any Oracle Database installation or full Oracle Client installation.

Oracle’s standard client-server network interoperability allows connections between different versions of Oracle Client libraries and Oracle Database. For certified configurations see Oracle Support’s [Doc ID 207303.1](#). In summary, Oracle Client 19, 18 and 12.2 can connect to Oracle Database 11.2 or greater. Oracle Client 12.1 can connect to Oracle Database 10.2 or greater. Oracle Client 11.2 can connect to Oracle Database 9.2 or greater. The technical restrictions on creating connections may be more flexible. For example Oracle Client 12.2 can successfully connect to Oracle Database 10.2.

cx\_Oracle uses the shared library loading mechanism available on each supported platform to load the Oracle Client libraries at runtime. It does not need to be rebuilt for different versions of the libraries. Since a single cx\_Oracle binary can use different client versions and also access multiple database versions, it is important your application is tested in your intended release environments. Newer Oracle clients support new features, such as the [oraaccess.xml](#) external configuration file available with 12.1 or later clients, session pool improvements, call timeouts with 18 or later clients, and [other enhancements](#).

The cx\_Oracle function `clientversion()` can be used to determine which Oracle Client version is in use and the attribute `Connection.version` can be used to determine which Oracle Database version a connection is accessing. These can then be used to adjust application behavior accordingly. Attempts to use some Oracle features that are not supported by a particular client/server combination may result in runtime errors. These include:

- when attempting to access attributes that are not supported by the current Oracle Client library you will get the error “ORA-24315: illegal attribute type”
- when attempting to use implicit results with Oracle Client 11.2 against Oracle Database 12c you will get the error “ORA-29481: Implicit results cannot be returned to client”
- when attempting to get array DML row counts with Oracle Client 11.2 you will get the error “DPI-1050: Oracle Client library must be at version 12.1 or higher”

### 1.2.4 Installing cx\_Oracle on Linux

This section discusses the generic installation method on Linux. Using Python and cx\_Oracle RPM packages on Oracle Linux is discussed in [Installing cx\\_Oracle RPMs on Oracle Linux](#).

#### Install cx\_Oracle

The generic way to install cx\_Oracle on Linux is to use Python’s [Pip](#) package to install cx\_Oracle from [PyPI](#):

```
python -m pip install cx_Oracle --upgrade
```

If you are behind a proxy, specify your proxy server:

```
python -m pip install cx_Oracle --proxy=http://proxy.example.com:80 --upgrade
```

This will download and install a pre-compiled binary [if one is available](#) for your architecture. If a pre-compiled binary is not available, the source will be downloaded, compiled, and the resulting binary installed. Compiling cx\_Oracle requires the `Python.h` header file. If you are using the default python package, this file is in the `python-devel` package or equivalent.

## Install Oracle Client

Using cx\_Oracle requires Oracle Client libraries to be installed. These provide the necessary network connectivity allowing cx\_Oracle to access an Oracle Database instance. Oracle Client versions 19, 18, 12 and 11.2 are supported.

- If your database is on a remote computer, then download the free [Oracle Instant Client](#) “Basic” or “Basic Light” package for your operating system architecture. Use the RPM or ZIP packages, based on your preferences.
- Alternatively use the client libraries already available in a locally installed database such as the free [Oracle XE](#) release.

## Oracle Instant Client Zip Files

To use cx\_Oracle with Oracle Instant Client zip files:

1. Download an Oracle 19, 18, 12, or 11.2 “Basic” or “Basic Light” zip file: [64-bit](#) or [32-bit](#), matching your Python architecture.
2. Unzip the package into a single directory that is accessible to your application. For example:

```
mkdir -p /opt/oracle
cd /opt/oracle
unzip instantclient-basic-linux.x64-19.3.0.0.0dbbru.zip
```

3. Install the `libaio` package with `sudo` or as the root user. For example:

```
sudo yum install libaio
```

On some Linux distributions this package is called `libaio1` instead.

4. If there is no other Oracle software on the machine that will be impacted, permanently add Instant Client to the runtime link path. For example, with `sudo` or as the root user:

```
sudo sh -c "echo /opt/oracle/instantclient_19_3 > /etc/ld.so.conf.d/oracle-
↪instantclient.conf"
sudo ldconfig
```

Alternatively, set the environment variable `LD_LIBRARY_PATH` to the appropriate directory for the Instant Client version. For example:

```
export LD_LIBRARY_PATH=/opt/oracle/instantclient_19_3:$LD_LIBRARY_PATH
```

5. If you intend to co-locate optional Oracle configuration files such as `tnsnames.ora`, `sqlnet.ora` or `oraaccess.xml` with Instant Client, then put them in the `network/admin` subdirectory. With Instant Client 12.2 or earlier, create this manually. For example:

```
mkdir -p /opt/oracle/instantclient_12_2/network/admin
```

This is the default Oracle configuration directory for executables linked with this Instant Client.

Alternatively, Oracle configuration files can be put in another, accessible directory. Then set the environment variable `TNS_ADMIN` to that directory name.

## Oracle Instant Client RPMs

To use cx\_Oracle with Oracle Instant Client RPMs:

1. Download an Oracle 19, 18, 12, or 11.2 “Basic” or “Basic Light” RPM: 64-bit or 32-bit, matching your Python architecture.

Oracle’s yum server has [Instant Client RPMs for Oracle Linux 7](#) and [Instant Client RPMs for Oracle Linux 6](#) that can be downloaded without needing a click-through.

2. Install the downloaded RPM with sudo or as the root user. For example:

```
sudo yum install oracle-instantclient19.3-basic-19.3.0.0-1.x86_64.rpm
```

Yum will automatically install required dependencies, such as `libaio`.

3. For Instant Client 19, the system library search path is automatically configured during installation.

For older versions, if there is no other Oracle software on the machine that will be impacted, permanently add Instant Client to the runtime link path. For example, with sudo or as the root user:

```
sudo sh -c "echo /usr/lib/oracle/18.3/client64/lib > /etc/ld.so.conf.d/oracle-
instantclient.conf"
sudo ldconfig
```

Alternatively, for version 18 and earlier, every shell running Python will need to have the environment variable `LD_LIBRARY_PATH` set to the appropriate directory for the Instant Client version. For example:

```
export LD_LIBRARY_PATH=/usr/lib/oracle/18.3/client64/lib:$LD_LIBRARY_PATH
```

4. If you intend to co-locate optional Oracle configuration files such as `tnsnames.ora`, `sqlnet.ora` or `oraaccess.xml` with Instant Client, then put them in the `network/admin` subdirectory under `lib/`. With Instant Client 12.2 or earlier, create this manually. For example:

```
sudo mkdir -p /usr/lib/oracle/12.2/client64/lib/network/admin
```

This is the default Oracle configuration directory for executables linked with this Instant Client.

Alternatively, Oracle configuration files can be put in another, accessible directory. Then set the environment variable `TNS_ADMIN` to that directory name.

## Local Database or Full Oracle Client

cx<sub>Oracle</sub> applications can use Oracle Client 19, 18, 12, or 11.2 libraries from a local Oracle Database or full Oracle Client installation.

The libraries must be either 32-bit or 64-bit, matching your Python architecture.

1. Set required Oracle environment variables by running the Oracle environment script. For example:

```
source /usr/local/bin/oraenv
```

For Oracle Database XE 11.2, run:

```
source /u01/app/oracle/product/11.2.0/xe/bin/oracle_env.sh
```

2. Optional Oracle configuration files such as `tnsnames.ora`, `sqlnet.ora` or `oraaccess.xml` can be placed in `$ORACLE_HOME/network/admin`.

Alternatively, Oracle configuration files can be put in another, accessible directory. Then set the environment variable `TNS_ADMIN` to that directory name.

## 1.2.5 Installing cx\_Oracle RPMs on Oracle Linux

Python and cx\_Oracle RPM packages are available from the [Oracle Linux yum server](#). Various versions of Python are easily installed. Using the yum server makes it easy to keep up to date.

Installation instructions are at [Oracle Linux for Python Developers](#).

## 1.2.6 Installing cx\_Oracle on Windows

### Install cx\_Oracle

Use Python's [Pip](#) package to install cx\_Oracle from [PyPI](#):

```
python -m pip install cx_Oracle --upgrade
```

If you are behind a proxy, specify your proxy server:

```
python -m pip install cx_Oracle --proxy=http://proxy.example.com:80 --upgrade
```

This will download and install a pre-compiled binary if one is available for your architecture. If a pre-compiled binary is not available, the source will be downloaded, compiled, and the resulting binary installed.

### Install Oracle Client

Using cx\_Oracle requires Oracle Client libraries to be installed. These provide the necessary network connectivity allowing cx\_Oracle to access an Oracle Database instance. Oracle Client versions 19, 18, 12 and 11.2 are supported.

- If your database is on a remote computer, then download the free [Oracle Instant Client](#) “Basic” or “Basic Light” package for your operating system architecture.
- Alternatively use the client libraries already available in a locally installed database such as the free [Oracle XE](#) release.

### Oracle Instant Client Zip Files

To use cx\_Oracle with Oracle Instant Client zip files:

1. Download an Oracle 19, 18, 12, or 11.2 “Basic” or “Basic Light” zip file: [64-bit](#) or [32-bit](#), matching your Python architecture.

Windows 7 users: Note that Oracle 19c is not supported on Windows 7.

2. Unzip the package into a directory that is accessible to your application. For example `unzip instantclient-basic-windows.x64-19.3.0.0dbru.zip` to `C:\oracle\instantclient_19_3`.
3. Add this directory to the PATH environment variable. For example, on Windows 7, update PATH in Control Panel -> System -> Advanced System Settings -> Advanced -> Environment Variables -> System Variables -> PATH. The Instant Client directory must occur in PATH before any other Oracle directories.

Restart any open command prompt windows.

To avoid interfering with existing tools that require other Oracle Client versions, instead of updating the system-wide PATH variable, you may prefer to write a batch file that sets PATH, for example:



```
REM mpyy.bat
SET PATH=C:\oracle\instantclient_19_3;%PATH%
python %*
```

Invoke this batch file every time you want to run python.

Alternatively use SET to change your PATH in each command prompt window before you run python.

4. Oracle Instant Client libraries require a Visual Studio redistributable with a 64-bit or 32-bit architecture to match Instant Client's architecture. Each Instant Client version requires a different redistributable version:
  - For Instant Client 19 install [VS 2017](#).
  - For Instant Client 18 or 12.2 install [VS 2013](#)
  - For Instant Client 12.1 install [VS 2010](#)
  - For Instant Client 11.2 install [VS 2005 64-bit](#) or [VS 2005 32-bit](#)
5. If you intend to co-locate optional Oracle configuration files such as `tnsnames.ora`, `sqlnet.ora` or `oraaccess.xml` with Instant Client, then create a `network\admin` subdirectory, for example `C:\oracle\instantclient_19_3\network\admin`.

This is the default Oracle configuration directory for executables linked with this Instant Client.

Alternatively, Oracle configuration files can be put in another, accessible directory. Then set the environment variable `TNS_ADMIN` to that directory name.

## Local Database or Full Oracle Client

cx\_Oracle applications can use Oracle Client 19, 18, 12, or 11.2 libraries from a local Oracle Database or full Oracle Client.

The Oracle libraries must be either 32-bit or 64-bit, matching your Python architecture.

1. Set the environment variable `PATH` to include the path that contains `OCI.dll`, if it is not already set. For example, on Windows 7, update `PATH` in Control Panel -> System -> Advanced System Settings -> Advanced -> Environment Variables -> System Variables -> `PATH`.

Restart any open command prompt windows.

2. Optional Oracle configuration files such as `tnsnames.ora`, `sqlnet.ora` or `oraaccess.xml` can be placed in the `network\admin` subdirectory of the Oracle Database software installation.

Alternatively, Oracle configuration files can be put in another, accessible directory. Then set the environment variable `TNS_ADMIN` to that directory name.

## 1.2.7 Installing cx\_Oracle on macOS

### Install Python

Make sure you are not using the bundled Python. This has restricted entitlements and will fail to load Oracle client libraries. Instead use [Homebrew](#) or [Python.org](#).

### Install cx\_Oracle

Use Python's [Pip](#) package to install cx\_Oracle from [PyPI](#):

```
python -m pip install cx_Oracle --upgrade
```

If you are behind a proxy, specify your proxy server:

```
python -m pip install cx_Oracle --proxy=http://proxy.example.com:80 --upgrade
```

The source will be downloaded, compiled, and the resulting binary installed.

## Install Oracle Instant Client

cx\_Oracle requires Oracle Client libraries, which are found in Oracle Instant Client for macOS. These provide the necessary network connectivity allowing cx\_Oracle to access an Oracle Database instance. Oracle Client versions 18, 12 and 11.2 are supported.

To use cx\_Oracle with Oracle Instant Client zip files:

1. Download the Oracle 19, 18, 12 or 11.2 “Basic” or “Basic Light” zip file from [here](#). Choose either a 64-bit or 32-bit package, matching your Python architecture.
2. Unzip the package into a single directory that is accessible to your application. For example:

```
mkdir -p /opt/oracle
unzip instantclient-basic-macos.x64-19.3.0.0.0dbbru.zip
```

3. Add links to \$HOME/lib or /usr/local/lib to enable applications to find the library. For example:

```
mkdir ~/lib
ln -s /opt/oracle/instantclient_19_3/libclntsh.dylib ~/lib/
```

Alternatively, copy the required OCI libraries. For example:

```
mkdir ~/lib
cp /opt/oracle/instantclient_19_3/{libclntsh.dylib.19.1,libclntshcore.dylib.19.1,
↪libnnz19.dylib,libociei.dylib} ~/lib/
```

For Instant Client 11.2, the OCI libraries must be copied. For example:

```
mkdir ~/lib
cp /opt/oracle/instantclient_11_2/{libclntsh.dylib.11.1,libnnz11.dylib,libociei.
↪dylib} ~/lib/
```

4. If you intend to co-locate optional Oracle configuration files such as tnsnames.ora, sqlnet.ora or oraaccess.xml with Instant Client, then create a network/admin subdirectory, if it does not already exist. For example:

```
mkdir -p /opt/oracle/instantclient_12_2/network/admin
```

This is the default Oracle configuration directory for executables linked with this Instant Client.

Alternatively, Oracle configuration files can be put in another, accessible directory. Then set the environment variable TNS\_ADMIN to that directory name.

## 1.2.8 Installing cx\_Oracle without Internet Access

To install cx\_Oracle on a computer that is not connected to the internet, download the appropriate cx\_Oracle file from PyPI. Transfer this file to the offline computer and install it with:

```
python -m pip install "<file_name>"
```

Then follow the general cx\_Oracle platform installation instructions to install Oracle client libraries.

### 1.2.9 Install Using GitHub

In order to install using the source on GitHub, use the following commands:

```
git clone https://github.com/oracle/python-cx_Oracle.git cx_Oracle
cd cx_Oracle
git submodule init
git submodule update
python setup.py install
```

Note that if you download a source zip file directly from GitHub then you will also need to download an [ODPI-C](#) source zip file and extract it inside the directory called “odpi”.

cx\_Oracle source code is also available from [oss.oracle.com](#). This can be cloned with:

```
git clone git://oss.oracle.com/git/oracle/python-cx_Oracle.git cx_Oracle
cd cx_Oracle
git submodule init
git submodule update
```

### 1.2.10 Install Using Source from PyPI

The source package can be downloaded manually from [PyPI](#) and extracted, after which the following commands should be run:

```
python setup.py build
python setup.py install
```

### 1.2.11 Upgrading from Older Versions

Review the release notes for deprecations and modify any affected code.

If you are upgrading from cx\_Oracle 5 note these installation changes:

- When using Oracle Instant Client, you should not set ORACLE\_HOME.
- On Linux, cx\_Oracle 6 and higher no longer uses Instant Client RPMs automatically. You must set LD\_LIBRARY\_PATH or use ldconfig to locate the Oracle client library.
- PyPI no longer allows Windows installers or Linux RPMs to be hosted. Use the supplied cx\_Oracle Wheels instead, or use RPMs from Oracle, see [Installing cx\\_Oracle RPMs on Oracle Linux](#).

### 1.2.12 Installing cx\_Oracle 5.3

If you require cx\_Oracle 5.3, download a Windows installer from [PyPI](#) or use `python -m pip install cx-oracle==5.3` to install from source.

Very old versions of cx\_Oracle can be found in the files section at [SourceForce](#).

## 1.2.13 Troubleshooting

If installation fails:

- Use option `-v` with pip. Review your output and logs. Try to install using a different method. **Google anything that looks like an error.** Try some potential solutions.
- Was there a network connection error? Do you need to set the environment variables `http_proxy` and/or `https_proxy`? Or try `pip install --proxy=http://proxy.example.com:80 cx_Oracle --upgrade`
- If upgrading gave no errors but the old version is still installed, try `pip install cx_Oracle --upgrade --force-reinstall`
- If you do not have access to modify your system version of Python, can you use `pip install cx_Oracle --upgrade --user` or `venv`?
- Do you get the error “No module named pip”? The pip module is builtin to Python from version 2.7.9 but is sometimes removed by the OS. Use the `venv` module (builtin to Python 3.x) or `virtualenv` module (Python 2.x) instead.
- Do you get the error “fatal error: dpi.h: No such file or directory” when building from source code? Ensure that your source installation has a subdirectory called “odpi” containing files. If missing, review the section on [Install Using GitHub](#).

If using cx\_Oracle fails:

- Do you get the error “DPI-1047: Oracle Client library cannot be loaded”?
  - Check that Python, cx\_Oracle and your Oracle Client libraries are all 64-bit or all 32-bit. The DPI-1047 message will tell you whether the 64-bit or 32-bit Oracle Client is needed for your Python.
  - On Windows, restart your command prompt and use `set PATH` to check the environment variable has the correct Oracle Client listed before any other Oracle directories.
  - On Windows, use the `DIR` command on the directory set in `PATH`. Verify that `OCI.DLL` exists there.
  - On Windows, check that the correct [Windows Redistributables](#) have been installed.
  - On Linux, check the `LD_LIBRARY_PATH` environment variable contains the Oracle Client library directory.
  - On macOS, make sure Oracle Instant Client is in `~/lib` or `/usr/local/lib` and that you are not using the bundled Python (use [Homebrew](#) or [Python.org](#) instead).
- If you got “DPI-1072: the Oracle Client library version is unsupported”, then review the installation requirements. cx\_Oracle needs Oracle client libraries 11.2 or later. Note that version 19 is not supported on Windows 7. Similar steps shown above for DPI-1047 may help.
- If you have both Python 2 and 3 installed, make sure you are using the correct python and pip (or python3 and pip3) executables.

## 1.3 Connecting to Oracle Database

This chapter covers connecting to Oracle Database using cx\_Oracle. It explains the various forms of connections and how to manage them.

### 1.3.1 Establishing Database Connections

There are two ways to connect to Oracle Database using cx\_Oracle:

- **Standalone connections**

These are useful when the application maintains a single user session to a database. Connections are created by `cx_Oracle.connect()` or its alias `cx_Oracle.Connection()`.

- **Pooled connections**

Connection pooling is important for performance when applications frequently connect and disconnect from the database. Oracle high availability features in the pool implementation mean that small pools can also be useful for applications that want a few connections available for infrequent use. Pools are created with `cx_Oracle.SessionPool()` and then `SessionPool.acquire()` can be called to obtain a connection from a pool.

Optional connection creation parameters allow you to utilize features such as *Sharding* and *Database Resident Connection Pooling (DRCP)*.

Once a connection is established, you can use it for SQL, PL/SQL and SODA.

#### Example: Standalone Connection to Oracle Database

```
import cx_Oracle

userpwd = ". . ." # Obtain password string from a user prompt or environment variable

connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1", encoding=
    ↪ "UTF-8")
```

cx\_Oracle also supports *external authentication* so passwords do not need to be in the application.

### 1.3.2 Closing Connections

Connections should be released when they are no longer needed by calling `Connection.close()`. Alternatively, you may prefer to let connections be automatically cleaned up when references to them go out of scope. This lets cx\_Oracle close dependent resources in the correct order. One other approach is the use of a “with” block, which ensures that a connection is closed once the block is completed. For example:

```
with cx_Oracle.connect(userName, password, "dbhost.example.com/orclpdb1",
    encoding="UTF-8") as connection:
    cursor = connection.cursor()
    cursor.execute("insert into SomeTable values (:1, :2)",
        (1, "Some string"))
    connection.commit()
```

This code ensures that, once the block is completed, the connection is closed and resources have been reclaimed by the database. In addition, any attempt to use the variable `connection` outside of the block will simply fail.

### 1.3.3 Oracle Environment Variables

Before running Python, ensure that any necessary Oracle environment variables are configured correctly. The variables needed by cx\_Oracle depend on how Python is installed, how you connect to the database, and what optional settings are desired.

Table 1.1: Common Oracle environment variables

Oracle Environment Variables	Purpose
ORACLE_HOME	The directory containing the Oracle Database software. The directory and various configuration files must be readable by the Python process. This variable should not be set if you are using Oracle Instant Client.
LD_LIBRARY_PATH	The library search path for platforms like Linux should include the Oracle libraries, for example \$ORACLE_HOME/lib or /opt/instantclient_19_3. This variable is not needed if the libraries are located by an alternative method, such as with ldconfig. On other UNIX platforms you may need to set an OS specific equivalent, such as LIBPATH or SHLIB_PATH.
PATH	The library search path for Windows should include the location where OCI.DLL is found.
TNS_ADMIN	The directory of Oracle Database client configuration files such as tnsnames.ora and sqlnet.ora. Needed if the configuration files are in a non-default location. See <i>Optional Oracle Net Configuration Files</i> .”
NLS_LANG	Determines the ‘national language support’ globalization options for cx_Oracle. If not set, a default value will be chosen by Oracle. See <i>Characters Sets and National Language Support (NLS)</i> .”
NLS_DATE_FORMAT, NLS_TIMESTAMP_FORMAT	Often set in Python applications to force a consistent date format independent of the locale. The variables are ignored if the environment variable NLS_LANG is not set.

It is recommended to set Oracle variables in the environment before invoking Python. However, they may also be set in application code with `os.putenv()` before the first connection is established. Note that setting operating system variables such as `LD_LIBRARY_PATH` must be done before running Python.

### 1.3.4 Optional Oracle Configuration Files

#### Optional Oracle Net Configuration Files

Optional Oracle Net configuration files affect connections and applications.

Common files include:

- `tnsnames.ora`: A configuration file that defines databases addresses for establishing connections. See *Net Service Name for Connection Strings*.
- `sqlnet.ora`: A profile configuration file that may contain information on features such as connection failover, network encryption, logging, and tracing. See *Oracle Net Services Reference* for more information.
- `cwallet.sso`: an Oracle wallet for secure connection.

The default location for these files is the `network/admin` directory under the Oracle Instant Client installation directory or the `$ORACLE_HOME` directory (for full database or client installations). To use a non-default location, put the files in a directory that is accessible to Python and set the `TNS_ADMIN` environment variable to that directory path. For example, if the file `/etc/my-oracle-config/tnsnames.ora` is being used, set the `TNS_ADMIN` environment variable to `/etc/my-oracle-config`.

#### Optional Oracle Client Configuration Files

When `cx_Oracle` uses Oracle Database Clients 12.1, or later, an optional client parameter file called `oraaccess.xml` can be used. This file can be used to override some application settings, which can be useful if the application cannot be altered. The file also enables auto-tuning of the client statement cache.

The file is read from the same directory as the *Optional Oracle Net Configuration Files*.

A sample `oraaccess.xml` file that sets the Oracle client 'prefetch' value to 50 rows and the 'client statement cache' value to 1, is shown below:

```
<oraaccess xmlns="http://xmlns.oracle.com/oci/oraaccess"
  xmlns:oci="http://xmlns.oracle.com/oci/oraaccess"
  schemaLocation="http://xmlns.oracle.com/oci/oraaccess
    http://xmlns.oracle.com/oci/oraaccess.xsd">
  <default_parameters>
    <prefetch>
      <rows>50</rows>
    </prefetch>
    <statement_cache>
      <size>1</size>
    </statement_cache>
  </default_parameters>
</oraaccess>
```

Refer to the documentation on [oraaccess.xml](#) for more details.

### 1.3.5 Connection Strings

The data source name parameter `dsn` of `cx_Oracle.connect()` and `cx_Oracle.SessionPool()` is the Oracle Database connection string identifying which database service to connect to. The `dsn` string can be one of:

- An Oracle Easy Connect string
- An Oracle Net Connect Descriptor string
- A Net Service Name mapping to a connect descriptor

For more information about naming methods, see [Oracle Net Service Reference](#).

#### Easy Connect Syntax for Connection Strings

An Easy Connect string is often the simplest connection string to use for the data source name parameter `dsn` of `cx_Oracle.connect()` and `cx_Oracle.SessionPool()`. This method does not need configuration files such as `tnsnames.ora`.

For example, to connect to the Oracle Database service `orclpdb1` that is running on the host `dbhost.example.com` with the default Oracle Database port 1521, use:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1",
    encoding="UTF-8")
```

If the database is using a non-default port, it must be specified:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com:1984/orclpdb1",
    encoding="UTF-8")
```

The Easy Connect syntax supports Oracle Database service names. It cannot be used with the older System Identifiers (SID).

The Easy Connect syntax has been extended in recent versions of Oracle Database client since its introduction in 10g. Check the Easy Connect Naming method in [Oracle Net Service Administrator's Guide](#) for the syntax to use in your version of the Oracle Client libraries.

If you are using Oracle Client 19c, the latest [Easy Connect Plus](#) syntax allows the use of multiple hosts or ports, along with optional entries for the wallet location, the distinguished name of the database server, and even lets some network configuration options be set. This means that a [sqlnet.ora](#) file is not needed for some common connection scenarios.

## Oracle Net Connect Descriptor Strings

The `cx_Oracle.makedsn()` function can be used to construct a connect descriptor string for the data source name parameter `dsn` of `cx_Oracle.connect()` and `cx_Oracle.SessionPool()`. The `makedsn()` function accepts the database hostname, the port number, and the service name. It also supports *sharding* syntax.

For example, to connect to the Oracle Database service `orclpdb1` that is running on the host `dbhost.example.com` with the default Oracle Database port 1521, use:

```
dsn = cx_Oracle.makedsn("dbhost.example.com", 1521, service_name="orclpdb1")
connection = cx_Oracle.connect("hr", userpwd, dsn, encoding="UTF-8")
```

Note the use of the named argument `service_name`. By default, the third parameter of `makedsn()` is a database System Identifier (SID), not a service name. However, almost all current databases use service names.

The value of `dsn` in this example is the connect descriptor string:

```
(DESCRIPTION=(ADDRESS=(PROTOCOL=TCP) (HOST=dbhost.example.com) (PORT=1521)) (CONNECT_
→DATA=(SERVICE_NAME=orclpdb1)))
```

You can manually create similar connect descriptor strings. This lets you extend the syntax, for example to support failover. These strings can be embedded directly in the application:

```
dsn = """(DESCRIPTION=
    (FAILOVER=on)
    (ADDRESS_LIST=
        (ADDRESS=(PROTOCOL=tcp) (HOST=sales1-svr) (PORT=1521))
        (ADDRESS=(PROTOCOL=tcp) (HOST=sales2-svr) (PORT=1521)))
    (CONNECT_DATA=(SERVICE_NAME=sales.example.com))) """
connection = cx_Oracle.connect("hr", userpwd, dsn, encoding="UTF-8")
```

## Net Service Names for Connection Strings

Connect Descriptor Strings are commonly stored in a `tnsnames.ora` file and associated with a Net Service Name. This name can be used directly for the data source name parameter `dsn` of `cx_Oracle.connect()` and `cx_Oracle.SessionPool()`. For example, given a `tnsnames.ora` file with the following contents:

```
ORCLPDB1 =
(DESCRIPTION =
  (ADDRESS = (PROTOCOL = TCP) (HOST = dbhost.example.com) (PORT = 1521))
  (CONNECT_DATA =
    (SERVER = DEDICATED)
    (SERVICE_NAME = orclpdb1)
  )
)
```

then you could connect using the following code:

```
connection = cx_Oracle.connect("hr", userpwd, "orclpdb1", encoding="UTF-8")
```

For more information about Net Service Names, see [Database Net Services Reference](#).



## JDBC and Oracle SQL Developer Connection Strings

The cx\_Oracle connection string syntax is different to Java JDBC and the common Oracle SQL Developer syntax. If these JDBC connection strings reference a service name like:

```
jdbc:oracle:thin:@hostname:port/service_name
```

for example:

```
jdbc:oracle:thin:@dbhost.example.com:1521/orclpdb1
```

then use Oracle's Easy Connect syntax in cx\_Oracle:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com:1521/orclpdb1",
    encoding="UTF-8")
```

Alternatively, if a JDBC connection string uses an old-style Oracle SID “system identifier”, and the database does not have a service name:

```
jdbc:oracle:thin:@hostname:port:sid
```

for example:

```
jdbc:oracle:thin:@dbhost.example.com:1521:orcl
```

then a connect descriptor string from `makedsn()` can be used in the application:

```
dsn = cx_Oracle.makedsn("dbhost.example.com", 1521, sid="orcl")
connection = cx_Oracle.connect("hr", userpwd, dsn, encoding="UTF-8")
```

Alternatively, create a `tnsnames.ora` (see *Optional Oracle Net Configuration Files*) entry, for example:

```
finance =
(DESCRIPTION =
  (ADDRESS = (PROTOCOL = TCP) (HOST = dbhost.example.com) (PORT = 1521))
  (CONNECT_DATA =
    (SID = ORCL)
  )
)
```

This can be referenced in cx\_Oracle:

```
connection = cx_Oracle.connect("hr", userpwd, "finance", encoding="UTF-8")
```

### 1.3.6 Connection Pooling

cx\_Oracle's connection pooling lets applications create and maintain a pool of connections to the database. The internal implementation uses Oracle's [session pool technology](#). In general, each connection in a cx\_Oracle connection pool corresponds to one Oracle session.

A connection pool is created by calling `SessionPool()`. This is generally called during application initialization. Connections can then be obtained from a pool by calling `acquire()`. The initial pool size and the maximum pool size are provided at the time of pool creation. When the pool needs to grow, new connections are created automatically. The pool can shrink back to the minimum size when connections are no longer in use. See [Connection Pooling](#) for more information.

Connections acquired from the pool should be released back to the pool using `SessionPool.release()` or `Connection.close()` when they are no longer required. Otherwise, they will be released back to the pool automatically when all of the variables referencing the connection go out of scope. The session pool can be completely closed using `SessionPool.close()`.

The example below shows how to connect to Oracle Database using a connection pool:

```
# Create the session pool
pool = cx_Oracle.SessionPool("hr", userpwd,
                             "dbhost.example.com/orclpdb1", min=2, max=5, increment=1, encoding="UTF-8")

# Acquire a connection from the pool
connection = pool.acquire()

# Use the pooled connection
cursor = connection.cursor()
for result in cursor.execute("select * from mytab"):
    print(result)

# Release the connection to the pool
pool.release(connection)

# Close the pool
pool.close()
```

Applications that are using connections concurrently in multiple threads should set the `threaded` parameter to `True` when creating a connection pool:

```
# Create the session pool
pool = cx_Oracle.SessionPool("hr", userpwd, "dbhost.example.com/orclpdb1",
                             min=2, max=5, increment=1, threaded=True, encoding="UTF-8")
```

See [Threads.py](#) for an example.

Before `SessionPool.acquire()` returns, `cx_Oracle` does a lightweight check to see if the network transport for the selected connection is still open. If it is not, then `acquire()` will clean up the connection and return a different one. This check will not detect cases such as where the database session has been killed by the DBA, or reached a database resource manager quota limit. To help in those cases, `acquire()` will also do a full round-trip ping to the database when it is about to return a connection that was unused in the pool for 60 seconds. If the ping fails, the connection will be discarded and another one obtained before `acquire()` returns to the application. Because this full ping is time based, it won't catch every failure. Also since network timeouts and session kills may occur after `acquire()` and before `Cursor.execute()`, applications need to check for errors after each `execute()` and make application-specific decisions about retrying work if there was a connection failure. Note both the lightweight and full ping connection checks can mask configuration issues, for example firewalls killing connections, so monitor the connection rate in AWR for an unexpected value. You can explicitly initiate a full ping to check connection liveness with `Connection.ping()` but overuse will impact performance and scalability.

The Oracle Real-World Performance Group's general recommendation for connection pools is use a fixed sized pool. The values of `min` and `max` should be the same (and `increment` equal to zero). the firewall, `resource manager` or user profile `IDLE_TIME` should not expire idle sessions. This avoids connection storms which can decrease throughput. See [Guideline for Preventing Connection Storms: Use Static Pools](#), which contains details about sizing of pools.

## Session Callbacks for Setting Pooled Connection State

Applications can set "session" state in each connection. Examples of session state are NLS settings from `ALTER SESSION` statements. Pooled connections will retain their session state after they have been released back to the pool.

However, because pools can grow, or connections in the pool can be recreated, there is no guarantee a subsequent `acquire()` call will return a database connection that has any particular state.

The `SessionPool()` parameter `sessionCallback` enables efficient setting of session state so that connections have a known session state, without requiring that state to be explicitly set after each `acquire()` call.

Connections can also be tagged when they are released back to the pool. The tag is a user-defined string that represents the session state of the connection. When acquiring connections, a particular tag can be requested. If a connection with that tag is available, it will be returned. If not, then another session will be returned. By comparing the actual and requested tags, applications can determine what exact state a session has, and make any necessary changes.

The session callback can be a Python function or a PL/SQL procedure.

There are three common scenarios for `sessionCallback`:

- When all connections in the pool should have the same state, use a Python callback without tagging.
- When connections in the pool require different state for different users, use a Python callback with tagging.
- When using *Database Resident Connection Pooling (DRCP)*: use a PL/SQL callback with tagging.

### Python Callback

If the `sessionCallback` parameter is a Python procedure, it will be called whenever `acquire()` will return a newly created database connection that has not been used before. It is also called when connection tagging is being used and the requested tag is not identical to the tag in the connection returned by the pool.

An example is:

```
# Set the NLS_DATE_FORMAT for a session
def initSession(connection, requestedTag):
    cursor = connection.cursor()
    cursor.execute("ALTER SESSION SET NLS_DATE_FORMAT = 'YYYY-MM-DD HH24:MI'")

# Create the pool with session callback defined
pool = cx_Oracle.SessionPool("hr", userpwd, "orclpdb1",
                             sessionCallback=initSession, encoding="UTF-8")

# Acquire a connection from the pool (will always have the new date format)
connection = pool.acquire()
```

If needed, the `initSession()` procedure is called internally before `acquire()` returns. It will not be called when previously used connections are returned from the pool. This means that the `ALTER SESSION` does not need to be executed after every `acquire()` call. This improves performance and scalability.

In this example tagging was not being used, so the `requestedTag` parameter is ignored.

### Connection Tagging

Connection tagging is used when connections in a pool should have differing session states. In order to retrieve a connection with a desired state, the `tag` attribute in `acquire()` needs to be set.

When `cx_Oracle` is using Oracle Client libraries 12.2 or later, then `cx_Oracle` uses ‘multi-property tags’ and the tag string must be of the form of one or more “name=value” pairs separated by a semi-colon, for example `"loc=uk;lang=cy"`.

When a connection is requested with a given tag, and a connection with that tag is not present in the pool, then a new connection, or an existing connection with cleaned session state, will be chosen by the pool and the session callback procedure will be invoked. The callback can then set desired session state and update the connection’s tag. However if the `matchanytag` parameter of `acquire()` is `True`, then any other tagged connection may be chosen by the pool and the callback procedure should parse the actual and requested tags to determine which bits of session state should be reset.

The example below demonstrates connection tagging:

```
def initSession(connection, requestedTag):
    if requestedTag == "NLS_DATE_FORMAT=SIMPLE":
        sql = "ALTER SESSION SET NLS_DATE_FORMAT = 'YYYY-MM-DD'"
    elif requestedTag == "NLS_DATE_FORMAT=FULL":
        sql = "ALTER SESSION SET NLS_DATE_FORMAT = 'YYYY-MM-DD HH24:MI'"
    cursor = connection.cursor()
    cursor.execute(sql)
    connection.tag = requestedTag

pool = cx_Oracle.SessionPool("hr", userpwd, "orclpdb1",
                             sessionCallback=initSession, encoding="UTF-8")

# Two connections with different session state:
connection1 = pool.acquire(tag = "NLS_DATE_FORMAT=SIMPLE")
connection2 = pool.acquire(tag = "NLS_DATE_FORMAT=FULL")
```

See [SessionCallback.py](#) for an example.

### PL/SQL Callback

When cx\_Oracle uses Oracle Client 12.2 or later, the session callback can also be the name of a PL/SQL procedure. A PL/SQL callback will be initiated only when the tag currently associated with a connection does not match the tag that is requested. A PL/SQL callback is most useful when using *Database Resident Connection Pooling (DRCP)* because DRCP does not require a round-trip to invoke a PL/SQL session callback procedure.

The PL/SQL session callback should accept two VARCHAR2 arguments:

```
PROCEDURE myPlsqlCallback (
    requestedTag IN VARCHAR2,
    actualTag    IN VARCHAR2
);
```

The logic in this procedure can parse the actual tag in the session that has been selected by the pool and compare it with the tag requested by the application. The procedure can then change any state required before the connection is returned to the application from [acquire\(\)](#).

If the `matchanytag` attribute of [acquire\(\)](#) is `True`, then a connection with any state may be chosen by the pool.

Oracle ‘multi-property tags’ must be used. The tag string must be of the form of one or more “name=value” pairs separated by a semi-colon, for example `"loc=uk;lang=cy"`.

In cx\_Oracle set `sessionCallback` to the name of the PL/SQL procedure. For example:

```
pool = cx_Oracle.SessionPool("hr", userpwd, "dbhost.example.com/orclpdb1:pooled",
                             sessionCallback="myPlsqlCallback", encoding="UTF-8")

connection = pool.acquire(tag="NLS_DATE_FORMAT=SIMPLE",
                          # DRCP options, if you are using DRCP
                          cclass='MYCLASS', purity=cx_Oracle.ATTR_PURITY_SELF)
```

See [SessionCallbackPLSQL.py](#) for an example.

### Heterogeneous and Homogeneous Connection Pools

By default, connection pools are ‘homogeneous’, meaning that all connections use the same database credentials. However, if the pool option `homogeneous` is `False` at the time of pool creation, then a ‘heterogeneous’ pool

will be created. This allows different credentials to be used each time a connection is acquired from the pool with `acquire()`.

### Heterogeneous Pools

When a heterogeneous pool is created by setting `homogeneous` to `False` and no credentials are supplied during pool creation, then a user name and password may be passed to `acquire()` as shown in this example:

```
pool = cx_Oracle.SessionPool(dsn="dbhost.example.com/orclpdb1", homogeneous=False,
                             encoding="UTF-8")
connection = pool.acquire(user="hr", password=userpwd)
```

## 1.3.7 Database Resident Connection Pooling (DRCP)

**Database Resident Connection Pooling (DRCP)** enables database resource sharing for applications that run in multiple client processes, or run on multiple middle-tier application servers. By default each connection from Python will use one database server process. DRCP allows pooling of these server processes. This reduces the amount of memory required on the database host. The DRCP pool can be shared by multiple applications.

DRCP is useful for applications which share the same database credentials, have similar session settings (for example date format settings or PL/SQL package state), and where the application gets a database connection, works on it for a relatively short duration, and then releases it.

Applications can choose whether or not to use pooled connections at runtime.

For efficiency, it is recommended that DRCP connections should be used in conjunction with cx\_Oracle's local *connection pool*.

### Using DRCP in Python

Using DRCP with cx\_Oracle applications involves the following steps:

1. Configuring and enabling DRCP in the database
2. Configuring the application to use a DRCP connection
3. Deploying the application

### Configuring and enabling DRCP

Every instance of Oracle Database uses a single, default connection pool. The pool can be configured and administered by a DBA using the `DBMS_CONNECTION_POOL` package:

```
EXECUTE DBMS_CONNECTION_POOL.CONFIGURE_POOL(
    pool_name => 'SYS_DEFAULT_CONNECTION_POOL',
    minsize => 4,
    maxsize => 40,
    incrsz => 2,
    session_cached_cursors => 20,
    inactivity_timeout => 300,
    max_think_time => 600,
    max_use_session => 500000,
    max_lifetime_session => 86400)
```

Alternatively the method `DBMS_CONNECTION_POOL.ALTER_PARAM()` can set a single parameter:

```
EXECUTE DBMS_CONNECTION_POOL.ALTER_PARAM(
    pool_name => 'SYS_DEFAULT_CONNECTION_POOL',
    param_name => 'MAX_THINK_TIME',
    param_value => '1200')
```

The `inactivity_timeout` setting terminates idle pooled servers, helping optimize database resources. To avoid pooled servers permanently being held onto by a selfish Python script, the `max_think_time` parameter can be set. The parameters `num_cbrok` and `maxconn_cbrok` can be used to distribute the persistent connections from the clients across multiple brokers. This may be needed in cases where the operating system per-process descriptor limit is small. Some customers have found that having several connection brokers improves performance. The `max_use_session` and `max_lifetime_session` parameters help protect against any unforeseen problems affecting server processes. The default values will be suitable for most users. See the [Oracle DRCP documentation](#) for details on parameters.

In general, if pool parameters are changed, the pool should be restarted, otherwise server processes will continue to use old settings.

There is a `DBMS_CONNECTION_POOL.RESTORE_DEFAULTS()` procedure to reset all values.

When DRCP is used with RAC, each database instance has its own connection broker and pool of servers. Each pool has the identical configuration. For example, all pools start with `minsize` server processes. A single `DBMS_CONNECTION_POOL` command will alter the pool of each instance at the same time. The pool needs to be started before connection requests begin. The command below does this by bringing up the broker, which registers itself with the database listener:

```
EXECUTE DBMS_CONNECTION_POOL.START_POOL()
```

Once enabled this way, the pool automatically restarts when the database instance restarts, unless explicitly stopped with the `DBMS_CONNECTION_POOL.STOP_POOL()` command:

```
EXECUTE DBMS_CONNECTION_POOL.STOP_POOL()
```

The pool cannot be stopped while connections are open.

### Application Deployment for DRCP

In order to use DRCP, the `cclass` and `purity` parameters should be passed to `cx_Oracle.connect()` or `SessionPool.acquire()`. If `cclass` is not set, the pooled server sessions will not be reused optimally, and the DRCP statistic views will record large values for `NUM_MISSES`.

The DRCP `purity` can be one of `ATTR_PURITY_NEW`, `ATTR_PURITY_SELF`, or `ATTR_PURITY_DEFAULT`. The value `ATTR_PURITY_SELF` allows reuse of both the pooled server process and session memory, giving maximum benefit from DRCP. See the Oracle documentation on [benefiting from scalability](#).

The connection string used for `connect()` or `acquire()` must request a pooled server by following one of the syntaxes shown below:

Using Oracle's Easy Connect syntax, the connection would look like:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orcl:pooled",
                               encoding="UTF-8")
```

Or if you connect using a Net Service Name named `customerpool`:

```
connection = cx_Oracle.connect("hr", userpwd, "customerpool", encoding="UTF-8")
```

Then only the Oracle Network configuration file `tnsnames.ora` needs to be modified:

```
customerpool = (DESCRIPTION=(ADDRESS=(PROTOCOL=tcP)
                                (HOST=dbhost.example.com)
                                (PORT=1521)) (CONNECT_DATA=(SERVICE_NAME=CUSTOMER)
                                (SERVER=POOLED)))
```

If these changes are made and the database is not actually configured for DRCP, or the pool is not started, then connections will not succeed and an error will be returned to the Python application.

Although applications can choose whether or not to use pooled connections at runtime, care must be taken to configure the database appropriately for the number of expected connections, and also to stop inadvertent use of non-DRCP connections leading to a resource shortage.

The example below shows how to connect to Oracle Database using Database Resident Connection Pooling:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orcl:pooled",
                               cclass="MYCLASS", purity=cx_Oracle.ATTR_PURITY_SELF, encoding="UTF-8")
```

The example below shows connecting to Oracle Database using DRCP and cx\_Oracle's connection pooling:

```
mypool = cx_Oracle.SessionPool("hr", userpwd, "dbhost.example.com/orcl:pooled",
                               encoding="UTF-8")
connection = mypool.acquire(cclass="MYCLASS", purity=cx_Oracle.ATTR_PURITY_SELF)
```

For more information about DRCP see [Oracle Database Concepts Guide](#), and for DRCP Configuration see [Oracle Database Administrator's Guide](#).

### Closing Connections

Python scripts where cx\_Oracle connections do not go out of scope quickly (which releases them), or do not currently use `Connection.close()`, should be examined to see if `close()` can be used, which then allows maximum use of DRCP pooled servers by the database:

```
# Do some database operations
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1:pooled",
                               encoding="UTF-8")
...
connection.close();

# Do lots of non-database work
...

# Do some more database operations
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1:pooled",
                               encoding="UTF-8")
...
connection.close();
```

### Monitoring DRCP

Data dictionary views are available to monitor the performance of DRCP. Database administrators can check statistics such as the number of busy and free servers, and the number of hits and misses in the pool against the total number of requests from clients. The views are:

- DBA\_CPOOL\_INFO
- V\$PROCESS
- V\$SESSION
- V\$CPOOL\_STATS
- V\$CPOOL\_CC\_STATS
- V\$CPOOL\_CONN\_INFO

### DBA\_CPOOL\_INFO View

DBA\_CPOOL\_INFO displays configuration information about the DRCP pool. The columns are equivalent to the `dbms_connection_pool.configure_pool()` settings described in the table of DRCP configuration options, with the addition of a STATUS column. The status is ACTIVE if the pool has been started and INACTIVE otherwise.

Note the pool name column is called `CONNECTION_POOL`. This example checks whether the pool has been started and finds the maximum number of pooled servers:

```
SQL> SELECT connection_pool, status, maxsize FROM dba_cpool_info;
```

CONNECTION_POOL	STATUS	MAXSIZE
-----	-----	-----
SYS_DEFAULT_CONNECTION_POOL	ACTIVE	40

### V\$PROCESS and V\$SESSION Views

The `V$SESSION` view shows information about the currently active DRCP sessions. It can also be joined with `V$PROCESS` via `V$SESSION.PADDR = V$PROCESS.ADDR` to correlate the views.

### V\$CPPOOL\_STATS View

The `V$CPPOOL_STATS` view displays information about the DRCP statistics for an instance. The `V$CPPOOL_STATS` view can be used to assess how efficient the pool settings are. This example query shows an application using the pool effectively. The low number of misses indicates that servers and sessions were reused. The wait count shows just over 1% of requests had to wait for a pooled server to become available:

NUM_REQUESTS	NUM_HITS	NUM_MISSES	NUM_WAITS
-----	-----	-----	-----
10031	99990	40	1055

If `cclass` was set (allowing pooled servers and sessions to be reused) then `NUM_MISSES` will be low. If the pool `maxsize` is too small for the connection load, then `NUM_WAITS` will be high.

### V\$CPPOOL\_CC\_STATS View

The view `V$CPPOOL_CC_STATS` displays information about the connection class level statistics for the pool per instance:

```
SQL> SELECT cclass_name, num_requests, num_hits, num_misses
        FROM v$cpool_cc_stats;
```

CCLASS_NAME	NUM_REQUESTS	NUM_HITS	NUM_MISSES
-----	-----	-----	-----
HR.MYCLASS	100031	99993	38

### V\$CPPOOL\_CONN\_INFO View

The `V$CPPOOL_CONN_INFO` view gives insight into client processes that are connected to the connection broker, making it easier to monitor and trace applications that are currently using pooled servers or are idle. This view was introduced in Oracle 11gR2.

You can monitor the view `V$CPPOOL_CONN_INFO` to, for example, identify misconfigured machines that do not have the connection class set correctly. This view maps the machine name to the class name:

```
SQL> SELECT cclass_name, machine FROM v$cpool_conn_info;
```

CCLASS_NAME	MACHINE
-----	-----
CJ.OCI:SP:wshbIFDtb7rgQwMyuYvodA	cjlinux
. . .	

In this example you would examine applications on `cjlinux` and make sure `cclass` is set.



### 1.3.8 Connecting Using Proxy Authentication

Proxy authentication allows a user (the “session user”) to connect to Oracle Database using the credentials of a ‘proxy user’. Statements will run as the session user. Proxy authentication is generally used in three-tier applications where one user owns the schema while multiple end-users access the data. For more information about proxy authentication, see the [Oracle documentation](#).

An alternative to using proxy users is to set `Connection.client_identifier` after connecting and use its value in statements and in the database, for example for *monitoring*.

The following proxy examples use these schemas. The `mysessionuser` schema is granted access to use the password of `myproxyuser`:

```
CREATE USER myproxyuser IDENTIFIED BY myproxyuserpw;
GRANT CREATE SESSION TO myproxyuser;

CREATE USER mysessionuser IDENTIFIED BY itdoesntmatter;
GRANT CREATE SESSION TO mysessionuser;

ALTER USER mysessionuser GRANT CONNECT THROUGH myproxyuser;
```

After connecting to the database, the following query can be used to show the session and proxy users:

```
SELECT SYS_CONTEXT('USERENV', 'PROXY_USER'),
       SYS_CONTEXT('USERENV', 'SESSION_USER')
FROM DUAL;
```

Standalone connection examples:

```
# Basic Authentication without a proxy
connection = cx_Oracle.connect("myproxyuser", "myproxyuserpw", "dbhost.example.com/
↳ orclpdb1",
                               encoding="UTF-8")
# PROXY_USER: None
# SESSION_USER: MYPROXYUSER

# Basic Authentication with a proxy
connection = cx_Oracle.connect(user="myproxyuser[mysessionuser]", "myproxyuserpw",
                               "dbhost.example.com/orclpdb1", encoding="UTF-8")
# PROXY_USER: MYPROXYUSER
# SESSION_USER: MYSESSIONUSER
```

Pooled connection examples:

```
# Basic Authentication without a proxy
pool = cx_Oracle.SessionPool("myproxyuser", "myproxyuser", "dbhost.example.com/
↳ orclpdb1",
                             encoding="UTF-8")
connection = pool.acquire()
# PROXY_USER: None
# SESSION_USER: MYPROXYUSER

# Basic Authentication with proxy
pool = cx_Oracle.SessionPool("myproxyuser[mysessionuser]", "myproxyuser",
                             "dbhost.example.com/orclpdb1", homogeneous=False, encoding="UTF-8
↳ ")
connection = pool.acquire()
```

(continues on next page)

(continued from previous page)

```
# PROXY_USER:  MYPROXYUSER
# SESSION_USER: MYSESSIONUSER
```

Note the use of a *heterogeneous* pool in the example above. This is required in this scenario.

### 1.3.9 Connecting Using External Authentication

Instead of storing the database username and password in Python scripts or environment variables, database access can be authenticated by an outside system. External Authentication allows applications to validate user access by an external password store (such as an Oracle Wallet), by the operating system, or with an external authentication service.

#### Using an Oracle Wallet for External Authentication

The following steps give an overview of using an Oracle Wallet. Wallets should be kept securely. Wallets can be managed with [Oracle Wallet Manager](#).

In this example the wallet is created for the `myuser` schema in the directory `/home/oracle/wallet_dir`. The `mkstore` command is available from a full Oracle client or Oracle Database installation. If you have been given wallet by your DBA, skip to step 3.

1. First create a new wallet as the `oracle` user:

```
mkstore -wrl "/home/oracle/wallet_dir" -create
```

This will prompt for a new password for the wallet.

2. Create the entry for the database user name and password that are currently hardcoded in your Python scripts. Use either of the methods shown below. They will prompt for the wallet password that was set in the first step.

#### Method 1 - Using an Easy Connect string:

```
mkstore -wrl "/home/oracle/wallet_dir" -createCredential dbhost.example.com/
↳orclpdb1 myuser myuserpw
```

#### Method 2 - Using a connect name identifier:

```
mkstore -wrl "/home/oracle/wallet_dir" -createCredential mynetalias myuser_
↳myuserpw
```

The alias key `mynetalias` immediately following the `-createCredential` option will be the connect name to be used in Python scripts. If your application connects with multiple different database users, you could create a wallet entry with different connect names for each.

You can see the newly created credential with:

```
mkstore -wrl "/home/oracle/wallet_dir" -listCredential
```

3. Skip this step if the wallet was created using an Easy Connect String. Otherwise, add an entry in [tnsnames.ora](#) for the connect name as follows:

```
mynetalias =
  (DESCRIPTION =
    (ADDRESS = (PROTOCOL = TCP) (HOST = dbhost.example.com) (PORT = 1521))
    (CONNECT_DATA =
      (SERVER = DEDICATED)
```

(continues on next page)

(continued from previous page)

```
(SERVICE_NAME = orclpdb1)
)
)
```

The file uses the description for your existing database and sets the connect name alias to `mynetalias`, which is the identifier used when adding the wallet entry.

4. Add the following wallet location entry in the `sqlnet.ora` file, using the DIRECTORY you created the wallet in:

```
WALLET_LOCATION =
  (SOURCE =
    (METHOD = FILE)
    (METHOD_DATA =
      (DIRECTORY = /home/oracle/wallet_dir)
    )
  )
SQLNET.WALLET_OVERRIDE = TRUE
```

Examine the Oracle documentation for full settings and values.

5. Ensure the configuration files are in a default location or set TNS\_ADMIN is set to the directory containing them. See *Optional Oracle Net Configuration Files*.

With an Oracle wallet configured, and readable by you, your scripts can connect using:

```
connection = cx_Oracle.connect(dsn="mynetalias", encoding="UTF-8")
```

or:

```
pool = cx_Oracle.SessionPool(externalauth=True, homogeneous=False, dsn="mynetalias",
                             encoding="UTF-8")
pool.acquire()
```

The `dsn` must match the one used in the wallet.

After connecting, the query:

```
SELECT SYS_CONTEXT('USERENV', 'SESSION_USER') FROM DUAL;
```

will show:

```
MYUSER
```

**Note:** Wallets are also used to configure TLS connections. If you are using a wallet like this, you may need a database username and password in `cx_Oracle.connect()` and `cx_Oracle.SessionPool()` calls.

### External Authentication and Proxy Authentication

The following examples show external wallet authentication combined with *proxy authentication*. These examples use the wallet configuration from above, with the addition of a grant to another user:

```
ALTER USER mysessionuser GRANT CONNECT THROUGH myuser;
```

After connection, you can check who the session user is with:

```
SELECT SYS_CONTEXT('USERENV', 'PROXY_USER'),
       SYS_CONTEXT('USERENV', 'SESSION_USER')
FROM DUAL;
```

Standalone connection example:

```
# External Authentication with proxy
connection = cx_Oracle.connect(user="[mysessionuser]", dsn="mynetalias", encoding=
    ↪ "UTF-8")
# PROXY_USER: MYUSER
# SESSION_USER: MYSESSIONUSER
```

Pooled connection example:

```
# External Authentication with proxy
pool = cx_Oracle.SessionPool(externalauth=True, homogeneous=False, dsn="mynetalias",
                             encoding="UTF-8")
pool.acquire(user="[mysessionuser]")
# PROXY_USER: MYUSER
# SESSION_USER: MYSESSIONUSER
```

The following usage is not supported:

```
pool = cx_Oracle.SessionPool("[mysessionuser]", externalauth=True, homogeneous=False,
                             dsn="mynetalias", encoding="UTF-8")
pool.acquire()
```

## Operating System Authentication

With Operating System authentication, Oracle allows user authentication to be performed by the operating system. The following steps give an overview of how to implement OS Authentication on Linux.

1. Login to your computer. The commands used in these steps assume the operating system user name is “oracle”.
2. Login to SQL\*Plus as the SYSTEM user and verify the value for the OS\_AUTHENT\_PREFIX parameter:

```
SQL> SHOW PARAMETER os_authent_prefix
```

NAME	TYPE	VALUE
os_authent_prefix	string	ops\$

3. Create an Oracle database user using the os\_authent\_prefix determined in step 2, and the operating system user name:

```
CREATE USER ops$oracle IDENTIFIED EXTERNALLY;
GRANT CONNECT, RESOURCE TO ops$oracle;
```

In Python, connect using the following code:

```
connection = cx_Oracle.connect(dsn="mynetalias", encoding="UTF-8")
```

Your session user will be OPS\$ORACLE.

If your database is not on the same computer as python, you can perform testing by setting the database configuration parameter remote\_os\_authent=true. Beware this is insecure.

See [Oracle Database Security Guide](#) for more information about Operating System Authentication.

### 1.3.10 Privileged Connections

The `mode` parameter of the function `cx_Oracle.connect()` specifies the database privilege that you want to associate with the user.

The example below shows how to connect to Oracle Database as SYSDBA:

```
connection = cx_Oracle.connect("sys", syspwd, "dbhost.example.com/orclpdb1",
                               mode=cx_Oracle.SYSDBA, encoding="UTF-8")

cursor = con.cursor()
sql = "GRANT SYSOPER TO hr"
cursor.execute(sql)
```

This is equivalent to executing the following in SQL\*Plus:

```
CONNECT sys/syspwd AS SYSDBA

GRANT SYSOPER TO hr;
```

### 1.3.11 Starting and Stopping Oracle Database

`cx_Oracle` has the capability of starting up the database using a privileged connection. This example shows a script that could be run as the 'oracle' operating system user who administers a local database installation on Linux. It assumes that the environment variable `ORACLE_SID` has been set to the SID of the database that should be started:

```
# the connection must be in PRELIM_AUTH mode to perform startup
connection = cx_Oracle.connect("/",
                               mode = cx_Oracle.SYSDBA | cx_Oracle.PRELIM_AUTH)
connection.startup()

# the following statements must be issued in normal SYSDBA mode
connection = cx_Oracle.connect("/", mode = cx_Oracle.SYSDBA, encoding="UTF-8")
cursor = connection.cursor()
cursor.execute("alter database mount")
cursor.execute("alter database open")
```

Similarly, `cx_Oracle` has the ability to shutdown the database using a privileged connection. This example also assumes that the environment variable `ORACLE_SID` has been set:

```
# need to connect as SYSDBA or SYSOPER
connection = cx_Oracle.connect("/", mode = cx_Oracle.SYSDBA)

# first shutdown() call must specify the mode, if DBSHUTDOWN_ABORT is used,
# there is no need for any of the other steps
connection.shutdown(mode = cx_Oracle.DBSHUTDOWN_IMMEDIATE)

# now close and dismount the database
cursor = connection.cursor()
cursor.execute("alter database close normal")
cursor.execute("alter database dismount")

# perform the final shutdown call
connection.shutdown(mode = cx_Oracle.DBSHUTDOWN_FINAL)
```

### 1.3.12 Securely Encrypting Network Traffic to Oracle Database

You can encrypt data transferred between the Oracle Database and the Oracle client libraries used by cx\_Oracle so that unauthorized parties are not able to view plain text values as the data passes over the network. The easiest configuration is Oracle's native network encryption. The standard SSL protocol can also be used if you have a PKI, but setup is necessarily more involved.

With native network encryption, the client and database server negotiate a key using Diffie-Hellman key exchange. This provides protection against man-in-the-middle attacks.

Native network encryption can be configured by editing Oracle Net's optional *sqlnet.ora* configuration file, on either the database server and/or on each cx\_Oracle 'client' machine. Parameters control whether data integrity checking and encryption is required or just allowed, and which algorithms the client and server should consider for use.

As an example, to ensure all connections to the database are checked for integrity and are also encrypted, create or edit the Oracle Database `$ORACLE_HOME/network/admin/sqlnet.ora` file. Set the checksum negotiation to always validate a checksum and set the checksum type to your desired value. The network encryption settings can similarly be set. For example, to use the SHA512 checksum and AES256 encryption use:

```
SQLNET.CRYPTO_CHECKSUM_SERVER = required
SQLNET.CRYPTO_CHECKSUM_TYPES_SERVER = (SHA512)
SQLNET.ENCRYPTION_SERVER = required
SQLNET.ENCRYPTION_TYPES_SERVER = (AES256)
```

If you definitely know that the database server enforces integrity and encryption, then you do not need to configure cx\_Oracle separately. However you can also, or alternatively, do so depending on your business needs. Create a *sqlnet.ora* on your client machine and locate it with other *Optional Oracle Net Configuration Files*:

```
SQLNET.CRYPTO_CHECKSUM_CLIENT = required
SQLNET.CRYPTO_CHECKSUM_TYPES_CLIENT = (SHA512)
SQLNET.ENCRYPTION_CLIENT = required
SQLNET.ENCRYPTION_TYPES_CLIENT = (AES256)
```

The client and server sides can negotiate the protocols used if the settings indicate more than one value is accepted.

Note that these are example settings only. You must review your security requirements and read the documentation for your Oracle version. In particular review the available algorithms for security and performance.

The `NETWORK_SERVICE_BANNER` column of the database view `V$SESSION_CONNECT_INFO` can be used to verify the encryption status of a connection.

For more information on Oracle Data Network Encryption and Integrity, configuring SSL network encryption and Transparent Data Encryption of data-at-rest in the database, see *Oracle Database Security Guide*.

### 1.3.13 Resetting Passwords

After connecting, passwords can be changed by calling *Connection.change\_password()*:

```
# Get the passwords from somewhere, such as prompting the user
oldpwd = getpass.getpass("Old Password for %s: " % username)
newpwd = getpass.getpass("New Password for %s: " % username)

connection.change_password(oldpwd, newpwd)
```

When a password has expired and you cannot connect directly, you can connect and change the password in one operation by using the `newpassword` parameter of the function *cx\_Oracle.connect()* constructor:

```
# Get the passwords from somewhere, such as prompting the user
oldpwd = getpass.getpass("Old Password for %s: " % username)
newpwd = getpass.getpass("New Password for %s: " % username)

connection = cx_Oracle.connect(username, oldpwd, "dbhost.example.com/orclpdb1",
                               newpassword=newpwd, encoding="UTF-8")
```

### 1.3.14 Connecting to Autonomous Databases

To enable connection to Oracle Autonomous Database in Oracle Cloud, a wallet needs be downloaded from the cloud GUI, and cx\_Oracle needs to be configured to use it. A database username and password is still required. The wallet only enables SSL/TLS.

#### Install the Wallet and Network Configuration Files

From the Oracle Cloud console for the database, download the wallet zip file. It contains the wallet and network configuration files. Note: keep wallet files in a secure location and share them only with authorized users.

Unzip the wallet zip file.

For cx\_Oracle, only these files from the zip are needed:

- `tnsnames.ora` - Maps net service names used for application connection strings to your database services
- `sqlnet.ora` - Configures Oracle Network settings
- `cwallet.sso` - Enables SSL/TLS connections

The other files and the wallet password are not needed.

Place these files as shown in *Optional Oracle Net Configuration Files*.

#### Run Your Application

The `tnsnames.ora` file contains net service names for various levels of database service. For example, if you create a database called CJDB1 with the Always Free services from the [Oracle Cloud Free Tier](#), then you might decide to use the connection string in `tnsnames.ora` called `cjdbl_high`.

Update your application to use your schema username, its database password, and a net service name, for example:

```
connection = cx_Oracle.connect("scott", userpwd, "cjdbl_high", encoding="UTF-8")
```

Once you have set Oracle environment variables required by your application, such as `TNS_ADMIN`, you can start your application.

If you need to create a new database schema so you do not login as the privileged ADMIN user, refer to the relevant Oracle Cloud documentation, for example see [Create Database Users](#) in the Oracle Autonomous Transaction Processing Dedicated Deployments manual.

#### Access Through a Proxy

If you are behind a firewall, you can tunnel TLS/SSL connections via a proxy using `HTTPS_PROXY` in the connect descriptor. Successful connection depends on specific proxy configurations. Oracle does not recommend doing this when performance is critical.

Edit `sqlnet.ora` and add a line:

SQLNET.USE\_HTTPS\_PROXY=on

Edit `tnsnames.ora` and add an `HTTPS_PROXY` proxy name and `HTTPS_PROXY_PORT` port to the connect descriptor address list of any service name you plan to use, for example:

```
cjdb1_high = (description= (address= (https_proxy=myproxy.example.com)(https_proxy_port=80)
(protocol=tcps)(port=1522)(host= ... )
```

### 1.3.15 Connecting to Sharded Databases

**Oracle Sharding** can be used to horizontally partition data across independent databases. A database table can be split so each shard contains a table with the same columns but a different subset of rows. These tables are known as sharded tables. Sharding is configured in Oracle Database, see the **Oracle Sharding** manual. Sharding requires Oracle Database and client libraries 12.2, or later.

The `cx_Oracle.connect()` and `SessionPool.acquire()` functions accept `shardingkey` and `supershardingkey` parameters that are a sequence of values used to route the connection directly to a given shard. A sharding key is always required. A super sharding key is additionally required when using composite sharding, which is when data has been partitioned by a list or range (the super sharding key), and then further partitioned by a sharding key.

When creating a connection pool, the `cx_Oracle.SessionPool()` attribute `maxSessionsPerShard` can be set. This is used to balance connections in the pool equally across shards. It requires Oracle client libraries 18.3, or later.

Shard key values may be of type string (mapping to `VARCHAR2` shard keys), number (`NUMBER`), bytes (`RAW`), or date (`DATE`). Multiple types may be used in each array. Sharding keys of `TIMESTAMP` type are not supported.

When connected to a shard, queries will only return data from that shard. For queries that need to access data from multiple shards, connections can be established to the coordinator shard catalog database. In this case, no shard key or super shard key is used.

As an example of direct connection, if sharding had been configured on a single `VARCHAR2` column like:

```
CREATE SHARDED TABLE customers (
  cust_id NUMBER,
  cust_name VARCHAR2(30),
  class VARCHAR2(10) NOT NULL,
  signup_date DATE,
  cust_code RAW(20),
  CONSTRAINT cust_name_pk PRIMARY KEY(cust_name))
PARTITION BY CONSISTENT HASH (cust_name)
PARTITIONS AUTO TABLESPACE SET ts1;
```

then direct connection to a shard can be made by passing a single sharding key:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1",
  encoding="UTF-8", shardingkey=["SCOTT"])
```

Numbers keys can be used in a similar way:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1",
  encoding="UTF-8", shardingkey=[110])
```

When sharding by `DATE`, you can connect like:



```
import datetime

d = datetime.datetime(2014, 7, 3)

connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1",
                               encoding="UTF-8", shardingkey=[d])
```

When sharding by RAW, you can connect like:

```
b = b'\x01\x04\x08';

connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1",
                               encoding="UTF-8", shardingkey=[b])
```

Multiple keys can be specified, for example:

```
keyArray = [70, "SCOTT", "gold", b'\x00\x01\x02']

connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1",
                               encoding="UTF-8", shardingkey=keyArray)
```

A super sharding key example is:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1",
                               encoding="UTF-8", supershardingkey=["goldclass"], shardingkey=["SCOTT"])
```

## 1.4 SQL Execution

Executing SQL statements is the primary way in which a Python application communicates with Oracle Database. Statements are executed using the methods `Cursor.execute()` or `Cursor.executemany()`. Statements include queries, Data Manipulation Language (DML), and Data Definition Language (DDL). A few other *specialty statements* can also be executed.

PL/SQL statements are discussed in *PL/SQL Execution*. Other chapters contain information on specific data types and features. See *Batch Statement Execution and Bulk Loading*, *Using CLOB and BLOB Data*, *Working with the JSON Data Type*, and *Working with XMLTYPE*.

cx\_Oracle can be used to execute individual statements, one at a time. It does not read SQL\*Plus “.sql” files. To read SQL files, use a technique like the one in `RunSqlScript()` in `samples/SampleEnv.py`

SQL statements should not contain a trailing semicolon (“;”) or forward slash (“/”). This will fail:

```
cur.execute("select * from MyTable;")
```

This is correct:

```
cur.execute("select * from MyTable")
```

### 1.4.1 SQL Queries

Queries (statements beginning with SELECT or WITH) can only be executed using the method `Cursor.execute()`. Rows can then be iterated over, or can be fetched using one of the methods `Cursor.fetchone()`, `Cursor.fetchmany()` or `Cursor.fetchall()`. There is a *default type mapping* to Python types that can be optionally *overridden*.

---

**Important:** Interpolating or concatenating user data with SQL statements, for example `cur.execute("SELECT * FROM mytab WHERE mycol = '" + myvar + "'")`, is a security risk and impacts performance. Use *bind variables* instead. For example, `cur.execute("SELECT * FROM mytab WHERE mycol = :mybv", mybv=myvar)`.

---

## Fetch Methods

After `Cursor.execute()`, the cursor is returned as a convenience. This allows code to iterate over rows like:

```
cur = connection.cursor()
for row in cur.execute("select * from MyTable"):
    print(row)
```

Rows can also be fetched one at a time using the method `Cursor.fetchone()`:

```
cur = connection.cursor()
cur.execute("select * from MyTable")
while True:
    row = cur.fetchone()
    if row is None:
        break
    print(row)
```

If rows need to be processed in batches, the method `Cursor.fetchmany()` can be used. The size of the batch is controlled by the `numRows` parameter, which defaults to the value of `Cursor.arraysize`.

```
cur = connection.cursor()
cur.execute("select * from MyTable")
numRows = 10
while True:
    rows = cur.fetchmany(numRows)
    if not rows:
        break
    for row in rows:
        print(row)
```

If all of the rows need to be fetched, and can be contained in memory, the method `Cursor.fetchall()` can be used.

```
cur = connection.cursor()
cur.execute("select * from MyTable")
rows = cur.fetchall()
for row in rows:
    print(row)
```

## Closing Cursors

A cursor may be used to execute multiple statements. Once it is no longer needed, it should be closed by calling `close()` in order to reclaim resources in the database. It will be closed automatically when the variable referencing it goes out of scope (and no further references are retained). One other way to control the lifetime of a cursor is to use a “with” block, which ensures that a cursor is closed once the block is completed. For example:

```
with connection.cursor() as cursor:
    for row in cursor.execute("select * from MyTable"):
        print(row)
```

This code ensures that, once the block is completed, the cursor is closed and resources have been reclaimed by the database. In addition, any attempt to use the variable `cursor` outside of the block will simply fail.

## Tuning Fetch Performance

For best performance, the cx\_Oracle `Cursor.arraysize` value should be set before calling `Cursor.execute()`. The default value is 100. For queries that return a large number of rows, increasing `arraysize` can improve performance because it reduces the number of round-trips to the database. However increasing this value increases the amount of memory required. The best value for your system depends on factors like your network speed, the query row size, and available memory. An appropriate value can be found by experimenting with your application.

Regardless of which fetch method is used to get rows, internally all rows are fetched in batches corresponding to the value of `arraysize`. The size does not affect how, or when, rows are returned to your application (other than being used as the default size for `Cursor.fetchmany()`). It does not limit the minimum or maximum number of rows returned by a query.

Along with tuning `arraysize`, make sure your **SQL statements are optimal** and avoid selecting columns that are not required by the application. For queries that do not need to fetch all data, use a *row limiting clause* to reduce the number of rows processed by the database.

An example of setting `arraysize` is:

```
cur = connection.cursor()
cur.arraysize = 500
for row in cur.execute("select * from MyTable"):
    print(row)
```

One place where increasing `arraysize` is particularly useful is in copying data from one database to another:

```
# setup cursors
sourceCursor = sourceConnection.cursor()
sourceCursor.arraysize = 1000
targetCursor = targetConnection.cursor()
targetCursor.arraysize = 1000

# perform fetch and bulk insertion
sourceCursor.execute("select * from MyTable")
while True:
    rows = sourceCursor.fetchmany()
    if not rows:
        break
    targetCursor.executemany("insert into MyTable values (:1, :2)", rows)
    targetConnection.commit()
```

If you know that a query returns a small number of rows then you should reduce the value of `arraysize`. For example if you are fetching only one row, then set `arraysize` to 1:

```
cur = connection.cursor()
cur.arraysize = 1
cur.execute("select * from MyTable where id = 1"):
row = cur.fetchone()
print(row)
```

In `cx_Oracle`, the `arraysize` value is only examined when a statement is executed the first time. To change the `arraysize` for a repeated statement, create a new cursor:

```
array_sizes = (10, 100, 1000)
for size in array_sizes:
    cursor = connection.cursor()
    cursor.arraysize = size
    start = time.time()
    cursor.execute(sql).fetchall()
    elapsed = time.time() - start
    print("Time for", size, elapsed, "seconds")
```

## Query Column Metadata

After executing a query, the column metadata such as column names and data types can be obtained using `Cursor.description`:

```
cur = connection.cursor()
cur.execute("select * from MyTable")
for column in cur.description:
    print(column)
```

This could result in metadata like:

```
('ID', <class 'cx_Oracle.NUMBER'>, 39, None, 38, 0, 0)
('NAME', <class 'cx_Oracle.STRING'>, 20, 20, None, None, 1)
```

## Fetch Data Types

The following table provides a list of all of the data types that `cx_Oracle` knows how to fetch. The middle column gives the type that is returned in the *query metadata*. The last column gives the type of Python object that is returned by default. Python types can be changed with *Output Type Handlers*.

Oracle Database Type	cx_Oracle Type	Default Python type
BFILE	<code>cx_Oracle.BFILE</code>	<code>cx_Oracle.LOB</code>
BINARY_DOUBLE	<code>cx_Oracle.NATIVE_FLOAT</code>	float
BINARY_FLOAT	<code>cx_Oracle.NATIVE_FLOAT</code>	float
BLOB	<code>cx_Oracle.BLOB</code>	<code>cx_Oracle.LOB</code>
CHAR	<code>cx_Oracle.FIXED_CHAR</code>	str
CLOB	<code>cx_Oracle.CLOB</code>	<code>cx_Oracle.LOB</code>
CURSOR	<code>cx_Oracle.CURSOR</code>	<code>cx_Oracle.Cursor</code>
DATE	<code>cx_Oracle.DATETIME</code>	datetime.datetime
INTERVAL DAY TO SECOND	<code>cx_Oracle.INTERVAL</code>	datetime.timedelta
LONG	<code>cx_Oracle.LONG_STRING</code>	str
LONG RAW	<code>cx_Oracle.LONG_BINARY</code>	bytes <sup>4</sup>
NCHAR	<code>cx_Oracle.FIXED_NCHAR</code>	str <sup>1</sup>
NCLOB	<code>cx_Oracle.NCLOB</code>	<code>cx_Oracle.LOB</code>
NUMBER	<code>cx_Oracle.NUMBER</code>	float or int <sup>2</sup>
NVARCHAR2	<code>cx_Oracle.NCHAR</code>	str <sup>1</sup>
OBJECT <sup>5</sup>	<code>cx_Oracle.OBJECT</code>	<code>cx_Oracle.Object</code>
RAW	<code>cx_Oracle.BINARY</code>	bytes <sup>4</sup>
ROWID	<code>cx_Oracle.ROWID</code>	str
TIMESTAMP	<code>cx_Oracle.TIMESTAMP</code>	datetime.datetime
TIMESTAMP WITH LOCAL TIME ZONE	<code>cx_Oracle.TIMESTAMP</code>	datetime.datetime <sup>3</sup>
TIMESTAMP WITH TIME ZONE	<code>cx_Oracle.TIMESTAMP</code>	datetime.datetime <sup>3</sup>
UROWID	<code>cx_Oracle.ROWID</code>	str
VARCHAR2	<code>cx_Oracle.STRING</code>	str

## Changing Fetched Data Types with Output Type Handlers

Sometimes the default conversion from an Oracle Database type to a Python type must be changed in order to prevent data loss or to fit the purposes of the Python application. In such cases, an output type handler can be specified for queries. Output type handlers do not affect values returned from `Cursor.callfunc()` or `Cursor.callproc()`.

Output type handlers can be specified on the `connection` or on the `cursor`. If specified on the cursor, fetch type handling is only changed on that particular cursor. If specified on the connection, all cursors created by that connection will have their fetch type handling changed.

The output type handler is expected to be a function with the following signature:

```
handler(cursor, name, defaultType, size, precision, scale)
```

The parameters are the same information as the query column metadata found in `Cursor.description`. The function is called once for each column that is going to be fetched. The function is expected to return a *variable object* (generally by a call to `Cursor.var()`) or the value `None`. The value `None` indicates that the default type should be used.

<sup>4</sup> In Python 2 these are identical to str objects since Python 2 doesn't have a native bytes object.

<sup>1</sup> In Python 2 these are fetched as unicode objects.

<sup>2</sup> If the precision and scale obtained from query column metadata indicate that the value can be expressed as an integer, the value will be returned as an int. If the column is unconstrained (no precision and scale specified), the value will be returned as a float or an int depending on whether the value itself is an integer. In all other cases the value is returned as a float. Note that in Python 2, values returned as integers will be int or long depending on the size of the integer.

<sup>5</sup> These include all user-defined types such as VARRAY, NESTED TABLE, etc.

<sup>3</sup> The timestamps returned are naive timestamps without any time zone information present.

Examples of output handlers are shown in *Fetches Number Precision* and *Fetching LOBs as Strings and Bytes*.

## Fetches Number Precision

One reason for using an output type handler is to ensure that numeric precision is not lost when fetching certain numbers. Oracle Database uses decimal numbers and these cannot be converted seamlessly to binary number representations like Python floats. In addition, the range of Oracle numbers exceeds that of floating point numbers. Python has decimal objects which do not have these limitations and cx\_Oracle knows how to perform the conversion between Oracle numbers and Python decimal values if directed to do so.

The following code sample demonstrates the issue:

```
cur = connection.cursor()
cur.execute("create table test_float (X number(5, 3))")
cur.execute("insert into test_float values (7.1)")
connection.commit()
cur.execute("select * from test_float")
val, = cur.fetchone()
print(val, "* 3 =", val * 3)
```

This displays `7.1 * 3 = 21.299999999999997`

Using Python decimal objects, however, there is no loss of precision:

```
import decimal

def NumberToDecimal(cursor, name, defaultType, size, precision, scale):
    if defaultType == cx_Oracle.NUMBER:
        return cursor.var(decimal.Decimal, arraysize=cursor.arraysize)

cur = connection.cursor()
cur.outputtypehandler = NumberToDecimal
cur.execute("select * from test_float")
val, = cur.fetchone()
print(val, "* 3 =", val * 3)
```

This displays `7.1 * 3 = 21.3`

The Python `decimal.Decimal` converter gets called with the string representation of the Oracle number. The output from `decimal.Decimal` is returned in the output tuple.

## Changing Query Results with Outconverters

cx\_Oracle “outconverters” can be used with *output type handlers* to change returned data.

For example, to make queries return empty strings instead of NULLs:

```
def OutConverter(value):
    if value is None:
        return ''
    return value

def OutputTypeHandler(cursor, name, defaultType, size, precision, scale):
    if defaultType in (cx_Oracle.STRING, cx_Oracle.FIXED_CHAR):
        return cursor.var(str, size, cur.arraysize, outconverter=OutConverter)

connection.outputtypehandler = OutputTypeHandler
```

## Scrollable Cursors

Scrollable cursors enable applications to move backwards, forwards, to skip rows, and to move to a particular row in a query result set. The result set is cached on the database server until the cursor is closed. In contrast, regular cursors are restricted to moving forward.

A scrollable cursor is created by setting the parameter `scrollable=True` when creating the cursor. The method `Cursor.scroll()` is used to move to different locations in the result set.

Examples are:

```
cursor = connection.cursor(scrollable=True)
cursor.execute("select * from ChildTable order by ChildId")

cursor.scroll(mode="last")
print("LAST ROW:", cursor.fetchone())

cursor.scroll(mode="first")
print("FIRST ROW:", cursor.fetchone())

cursor.scroll(8, mode="absolute")
print("ROW 8:", cursor.fetchone())

cursor.scroll(6)
print("SKIP 6 ROWS:", cursor.fetchone())

cursor.scroll(-4)
print("SKIP BACK 4 ROWS:", cursor.fetchone())
```

## Fetching Oracle Database Objects and Collections

Oracle Database named object types and user-defined types can be fetched directly in queries. Each item is represented as a *Python object* corresponding to the Oracle Database object. This Python object can be traversed to access its elements. Attributes including `ObjectType.name` and `ObjectType.iscollection`, and methods including `Object.aslist()` and `Object.asdict()` are available.

For example, if a table `mygeometrytab` contains a column `geometry` of Oracle's predefined Spatial object type `SDO_GEOMETRY`, then it can be queried and printed:

```
cur.execute("select geometry from mygeometrytab")
for obj, in cur:
    dumpobject(obj)
```

Where `dumpobject()` is defined as:

```
def dumpobject(obj, prefix = ""):
    if obj.type.iscollection:
        print(prefix, "[")
        for value in obj.aslist():
            if isinstance(value, cx_Oracle.Object):
                dumpobject(value, prefix + " ")
            else:
                print(prefix + " ", repr(value))
        print(prefix, "]")
    else:
        print(prefix, "{")
        for attr in obj.type.attributes:
```

(continues on next page)

(continued from previous page)

```

        value = getattr(obj, attr.name)
        if isinstance(value, cx_Oracle.Object):
            print(prefix + "    " + attr.name + ":")
            dumpobject(value, prefix + "    ")
        else:
            print(prefix + "    " + attr.name + ":", repr(value))
    print(prefix, "{")

```

This might produce output like:

```

{
  SDO_GTYPE: 2003
  SDO_SRID: None
  SDO_POINT:
  {
    X: 1
    Y: 2
    Z: 3
  }
  SDO_ELEM_INFO:
  [
    1
    1003
    3
  ]
  SDO_ORDINATES:
  [
    1
    1
    5
    7
  ]
}

```

Other information on using Oracle objects is in *Using Bind Variables*.

## Limiting Rows

Query data is commonly broken into one or more sets:

- To give an upper bound on the number of rows that a query has to process, which can help improve database scalability.
- To perform ‘Web pagination’ that allows moving from one set of rows to a next, or previous, set on demand.
- For fetching of all data in consecutive small sets for batch processing. This happens because the number of records is too large for Python to handle at one time.

The latter can be handled by calling `Cursor.fetchmany()` with one execution of the SQL query.

‘Web pagination’ and limiting the maximum number of rows are discussed in this section. For each ‘page’ of results, a SQL query is executed to get the appropriate set of rows from a table. Since the query may be executed more than once, make sure to use *bind variables* for row numbers and row limits.

Oracle Database 12c SQL introduced an `OFFSET / FETCH` clause which is similar to the `LIMIT` keyword of MySQL. In Python you can fetch a set of rows using:



```
myoffset = 0          // do not skip any rows (start at row 1)
mymaxnumrows = 20    // get 20 rows

sql =
    """SELECT last_name
       FROM employees
       ORDER BY last_name
       OFFSET :offset ROWS FETCH NEXT :maxnumrows ROWS ONLY"""

cur = connection.cursor()
for row in cur.execute(sql, offset=myoffset, maxnumrows=mymaxnumrows):
    print(row)
```

In applications where the SQL query is not known in advance, this method sometimes involves appending the `OFFSET` clause to the ‘real’ user query. Be very careful to avoid SQL injection security issues.

For Oracle Database 11g and earlier there are several alternative ways to limit the number of rows returned. The old, canonical paging query is:

```
SELECT *
FROM (SELECT a.*, ROWNUM AS rnum
      FROM (YOUR_QUERY_GOES_HERE -- including the order by) a
      WHERE ROWNUM <= MAX_ROW)
WHERE rnum >= MIN_ROW
```

Here, `MIN_ROW` is the row number of first row and `MAX_ROW` is the row number of the last row to return. For example:

```
SELECT *
FROM (SELECT a.*, ROWNUM AS rnum
      FROM (SELECT last_name FROM employees ORDER BY last_name) a
      WHERE ROWNUM <= 20)
WHERE rnum >= 1
```

This always has an ‘extra’ column, here called `RNUM`.

An alternative and preferred query syntax for Oracle Database 11g uses the analytic `ROW_NUMBER()` function. For example to get the 1st to 20th names the query is:

```
SELECT last_name FROM
(SELECT last_name,
      ROW_NUMBER() OVER (ORDER BY last_name) AS myr
  FROM employees)
WHERE myr BETWEEN 1 and 20
```

Make sure to use *bind variables* for the upper and lower limit values.

## Querying Corrupt Data

If queries fail with the error “codec can’t decode byte” when you select data, then:

- Check your *character set* is correct. Review the *client and database character sets*. Consider using UTF-8, if this is appropriate:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1
↪",
                               encoding="UTF-8", nencoding="UTF-8")
```

- Check for corrupt data in the database.

If data really is corrupt, you can pass options to the internal `decode()` used by `cx_Oracle` to allow it to be selected and prevent the whole query failing. Do this by creating an *outputtypehandler* and setting `encodingErrors`. For example to replace corrupt characters in character columns:

```
def OutputTypeHandler(cursor, name, defaultType, size, precision, scale):
    if defaultType == cx_Oracle.STRING:
        return cursor.var(defaultType, size, arraysize=cursor.arraysize,
                           encodingErrors="replace")

cursor.outputtypehandler = OutputTypeHandler

cursor.execute("select column1, column2 from SomeTableWithBadData")
```

Other codec behaviors can be chosen for `encodingErrors`, see [Error Handlers](#).

## 1.4.2 INSERT and UPDATE Statements

SQL Data Manipulation Language statements (DML) such as INSERT and UPDATE can easily be executed with `cx_Oracle`. For example:

```
cur = connection.cursor()
cur.execute("insert into MyTable values (:idbv, :nmbv)", [1, "Fredico"])
```

Do not concatenate or interpolate user data into SQL statements. See *Using Bind Variables* instead.

See *Transaction Management* for best practices on committing and rolling back data changes.

When handling multiple data values, use *executemany()* for performance. See *Batch Statement Execution and Bulk Loading*

### Inserting NULLs

Oracle requires a type, even for null values. When you pass the value `None`, then `cx_Oracle` assumes the type is `STRING`. If this is not the desired type, you can explicitly set it. For example, to insert a null *Oracle Spatial SDO\_GEOMETRY* object:

```
typeObj = connection.gettype("SDO_GEOMETRY")
cur = connection.cursor()
cur.setinputsizes(typeObj)
cur.execute("insert into sometable values (:1)", [None])
```

## 1.5 PL/SQL Execution

PL/SQL stored procedures, functions and anonymous blocks can be called from `cx_Oracle`.

### 1.5.1 PL/SQL Stored Procedures

The *Cursor.callproc()* method is used to call PL/SQL procedures.

If a procedure with the following definition exists:

```
create or replace procedure myproc (
    a_Value1          number,
    a_Value2          out number
) as
begin
    a_Value2 := a_Value1 * 2;
end;
```

then the following Python code can be used to call it:

```
outVal = cursor.var(int)
cursor.callproc('myproc', [123, outVal])
print(outVal.getvalue())      # will print 246
```

Calling `Cursor.callproc()` actually generates an anonymous PL/SQL block as shown below, which is then executed:

```
cursor.execute("begin myproc(:1,:2); end;", [123, outval])
```

See *Using Bind Variables* for information on binding.

## 1.5.2 PL/SQL Stored Functions

The `Cursor.callfunc()` method is used to call PL/SQL functions.

The `returnType` parameter for `callfunc()` is expected to be a Python type, one of the *cx\_Oracle types* or an *Object Type*.

If a function with the following definition exists:

```
create or replace function myfunc (
    a_StrVal varchar2,
    a_NumVal number
) return number as
begin
    return length(a_StrVal) + a_NumVal * 2;
end;
```

then the following Python code can be used to call it:

```
returnVal = cursor.callfunc("myfunc", int, ["a string", 15])
print(returnVal)      # will print 38
```

A more complex example that returns a spatial (SDO) object can be seen below. First, the SQL statements necessary to set up the example:

```
create table MyPoints (
    id number(9) not null,
    point sdo_point_type not null
);

insert into MyPoints values (1, sdo_point_type(125, 375, 0));

create or replace function spatial_queryfn (
    a_Id number
) return sdo_point_type is
```

(continues on next page)

(continued from previous page)

```

        t_Result sdo_point_type;
begin
    select point
    into t_Result
    from MyPoints
    where Id = a_Id;

    return t_Result;
end;
/

```

The Python code that will call this procedure looks as follows:

```

objType = connection.gettype("SDO_POINT_TYPE")
cursor = connection.cursor()
returnVal = cursor.callfunc("spatial_queryfn", objType, [1])
print("(%d, %d, %d)" % (returnVal.X, returnVal.Y, returnVal.Z))
# will print (125, 375, 0)

```

See *Using Bind Variables* for information on binding.

### 1.5.3 Anonymous PL/SQL Blocks

An anonymous PL/SQL block can be called as shown:

```

var = cursor.var(int)
cursor.execute("""
    begin
        :outVal := length(:inVal);
    end;""", inVal="A sample string", outVal=var)
print(var.getvalue())      # will print 15

```

See *Using Bind Variables* for information on binding.

### 1.5.4 Using DBMS\_OUTPUT

The standard way to print output from PL/SQL is using the package `DBMS_OUTPUT`. In order to use this package from Python use the following steps:

- Call the PL/SQL procedure `DBMS_OUTPUT.ENABLE()` to enable output to be buffered for the connection.
- Execute some PL/SQL procedure that puts text in the buffer by calling `DBMS_OUTPUT.PUT_LINE()`.
- Call `DBMS_OUTPUT.GET_LINE()` repeatedly to fetch the text from the buffer until the status returned is non-zero.

For example:

```

# enable DBMS_OUTPUT
cursor.callproc("dbms_output.enable")

# execute some PL/SQL that calls DBMS_OUTPUT.PUT_LINE
cursor.execute("""
    begin
        dbms_output.put_line('This is the cx_Oracle manual');

```

(continues on next page)

(continued from previous page)

```

        dbms_output.put_line('Demonstrating use of DBMS_OUTPUT');
    end; """

# perform loop to fetch the text that was added by PL/SQL
textVar = cursor.var(str)
statusVar = cursor.var(int)
while True:
    cursor.callproc("dbms_output.get_line", (textVar, statusVar))
    if statusVar.getvalue() != 0:
        break
    print(textVar.getvalue())

```

This will produce the following output:

```

This is the cx_Oracle manual
Demonstrating use of DBMS_OUTPUT

```

## 1.5.5 Implicit results

Implicit results permit a Python program to consume cursors returned by a PL/SQL block without the requirement to use OUT REF CURSOR parameters. The method `Cursor.getimplicitresults()` can be used for this purpose. It requires both the Oracle Client and Oracle Database to be 12.1 or higher.

An example using implicit results is as shown:

```

cursor.execute("""
    declare
        cust_cur sys_refcursor;
        sales_cur sys_refcursor;
    begin
        open cust_cur for SELECT * FROM cust_table;
        dbms_sql.return_result(cust_cur);

        open sales_cur for SELECT * FROM sales_table;
        dbms_sql.return_result(sales_cur);
    end; """)

for implicitCursor in cursor.getimplicitresults():
    for row in implicitCursor:
        print(row)

```

Data from both the result sets are returned:

```

(1, 'Tom')
(2, 'Julia')
(1000, 1, 'BOOKS')
(2000, 2, 'FURNITURE')

```

## 1.5.6 Edition-Based Redefinition (EBR)

Oracle Database's **Edition-Based Redefinition** feature enables upgrading of the database component of an application while it is in use, thereby minimizing or eliminating down time. This feature allows multiple versions of views, synonyms, PL/SQL objects and SQL Translation profiles to be used concurrently. Different versions of the database objects are associated with an "edition".

The simplest way to set an edition is to pass the edition parameter to `cx_Oracle.connect()` or `cx_Oracle.SessionPool()`:

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1",
                               edition="newsales", encoding="UTF-8")
```

The edition could also be set by setting the environment variable `ORA_EDITION` or by executing the SQL statement:

```
alter session set edition = <edition name>;
```

Regardless of which method is used to set the edition, the value that is in use can be seen by examining the attribute `Connection.edition`. If no value has been set, the value will be `None`. This corresponds to the database default edition `ORA$BASE`.

Consider an example where one version of a PL/SQL function `Discount` is defined in the database default edition `ORA$BASE` and the other version of the same function is defined in a user created edition `DEMO`.

```
connect <username>/<password>

-- create function using the database default edition
CREATE OR REPLACE FUNCTION Discount(price IN NUMBER) RETURN NUMBER IS
BEGIN
    return price * 0.9;
END;
/
```

A new edition named 'DEMO' is created and the user given permission to use editions. The use of `FORCE` is required if the user already contains one or more objects whose type is editionable and that also have non-editioned dependent objects.

```
connect system/<password>

CREATE EDITION demo;
ALTER USER <username> ENABLE EDITIONS FORCE;
GRANT USE ON EDITION demo to <username>;
```

The `Discount` function for the demo edition is as follows:

```
connect <username>/<password>

alter session set edition = demo;

-- Function for the demo edition
CREATE OR REPLACE FUNCTION Discount(price IN NUMBER) RETURN NUMBER IS
BEGIN
    return price * 0.5;
END;
/
```

The Python application can then call the required version of the PL/SQL function as shown:

```
connection = cx_Oracle.connect(<username>, <password>, "dbhost.example.com/orclpdb1",
                              encoding="UTF-8")
print("Edition is:", repr(connection.edition))

cursor = connection.cursor()
discountedPrice = cursor.callfunc("Discount", int, [100])
print("Price after discount is:", discountedPrice)
```

(continues on next page)

(continued from previous page)

```
# Use the edition parameter for the connection
connection = cx_Oracle.connect(<username>, <password>, "dbhost.example.com/orclpdb1",
    edition = "demo", encoding="UTF-8")
print("Edition is:", repr(connection.edition))

cursor = connection.cursor()
discountedPrice = cursor.callfunc("Discount", int, [100])
print("Price after discount is:", discountedPrice)
```

The output of the function call for the default and demo edition is as shown:

```
Edition is: None
Price after discount is: 90
Edition is: 'DEMO'
Price after discount is: 50
```

## 1.6 Using Bind Variables

SQL and PL/SQL statements that pass data to and from Oracle Database should use placeholders in SQL and PL/SQL statements that mark where data is supplied or returned. These placeholders are referred to as bind variables or bind parameters. A bind variable is a colon-prefixed identifier or numeral. For example, there are two bind variables (`dept_id` and `dept_name`) in this SQL statement:

```
sql = """insert into departments (department_id, department_name)
        values (:dept_id, :dept_name)"""
cursor.execute(sql, [280, "Facility"])
```

Using bind variables is important for scalability and security. They help avoid SQL Injection security problems because data is never treated as part of an executable statement. Never concatenate or interpolate user data into SQL statements:

```
did = 280
dnm = "Facility"

# !! Never do this !!
sql = f"""insert into departments (department_id, department_name)
        values ({did}, {dnm})"""
cursor.execute(sql)
```

Bind variables reduce parsing and execution costs when statements are executed more than once with different data values. If you do not use bind variables, Oracle must reparse and cache multiple statements. When using bind variables, Oracle Database may be able to reuse the statement execution plan and context.

Bind variables can be used to substitute data, but cannot be used to substitute the text of the statement. You cannot, for example, use a bind variable where a column name or a table name is required. Bind variables also cannot be used in Data Definition Language (DDL) statements, such as `CREATE TABLE` or `ALTER` statements.

### 1.6.1 Binding By Name or Position

Binding can be done by name or by position. A named bind is performed when the bind variables in a statement are associated with a name. For example:

```

cursor.execute("""
    insert into departments (department_id, department_name)
    values (:dept_id, :dept_name)""", dept_id=280,
    dept_name="Facility")

# alternatively, the parameters can be passed as a dictionary instead of as
# keyword parameters
data = { dept_id=280, dept_name="Facility" }
cursor.execute("""
    insert into departments (department_id, department_name)
    values (:dept_id, :dept_name)""", data)

```

In the above example, the keyword parameter names or the keys of the dictionary must match the bind variable names. The advantages of this approach are that the location of the bind variables in the statement is not important, the names can be meaningful and the names can be repeated while still only supplying the value once.

A positional bind is performed when a list of bind values are passed to the execute() call. For example:

```

cursor.execute("""
    insert into departments (department_id, department_name)
    values (:dept_id, :dept_name)""", [280, "Facility"])

```

Note that for SQL statements, the order of the bind values must exactly match the order of each bind variable and duplicated names must have their values repeated. For PL/SQL statements, however, the order of the bind values must exactly match the order of each **unique** bind variable found in the PL/SQL block and values should not be repeated. In order to avoid this difference, binding by name is recommended when bind variable names are repeated.

## 1.6.2 Bind Direction

The caller can supply data to the database (IN), the database can return data to the caller (OUT) or the caller can supply initial data to the database and the database can supply the modified data back to the caller (IN/OUT). This is known as the bind direction.

The examples shown above have all supplied data to the database and are therefore classified as IN bind variables. In order to have the database return data to the caller, a variable must be created. This is done by calling the method `Cursor.var()`, which identifies the type of data that will be found in that bind variable and its maximum size among other things.

Here is an example showing how to use OUT binds. It calculates the sum of the integers 8 and 7 and stores the result in an OUT bind variable of type integer:

```

outVal = cursor.var(int)
cursor.execute("""
    begin
        :outVal := :inBindVar1 + :inBindVar2;
    end;""", outVal=outVal, inBindVar1=8, inBindVar2=7)
print(outVal.getvalue())           # will print 15

```

If instead of simply getting data back you wish to supply an initial value to the database, you can set the variable's initial value. This example is the same as the previous one but it sets the initial value first:

```

inOutVal = cursor.var(int)
inOutVal.setvalue(0, 25)
cursor.execute("""
    begin
        :inOutBindVar := :inOutBindVar + :inBindVar1 + :inBindVar2;

```

(continues on next page)



(continued from previous page)

```

        end;""" , inOutBindVar=inOutVal, inBindVar1=8, inBindVar2=7)
print(inOutVal.getvalue())           # will print 40

```

When binding data to parameters of PL/SQL procedures that are declared as OUT parameters, it is worth noting that any value that is set in the bind variable will be ignored. In addition, any parameters declared as IN/OUT that do not have a value set will start out with a value of null.

### 1.6.3 Binding Null Values

In cx\_Oracle, null values are represented by the Python singleton None.

For example:

```

cursor.execute("""
    insert into departments (department_id, department_name)
    values (:dept_id, :dept_name)""", dept_id=280, dept_name=None)

```

In this specific case, because the DEPARTMENT\_NAME column is defined as a NOT NULL column, an error will occur:

```

cx_Oracle.IntegrityError: ORA-01400: cannot insert NULL into ("HR"."DEPARTMENTS".
↳ "DEPARTMENT_NAME")

```

If this value is bound directly, cx\_Oracle assumes it to be a string (equivalent to a VARCHAR2 column). If you need to use a different Oracle type you will need to make a call to *Cursor.setinputsize()* or create a bind variable with the correct type by calling *Cursor.var()*.

### 1.6.4 Binding ROWID Values

The pseudo-column ROWID uniquely identifies a row within a table. In cx\_Oracle, ROWID values are represented as strings. The example below shows fetching a row and then updating that row by binding its rowid:

```

# fetch the row
cursor.execute("""
    select rowid, manager_id
    from departments
    where department_id = :dept_id""", dept_id=280)
rowid, manager_id = cursor.fetchone()

# update the row by binding ROWID
cursor.execute("""
    update departments set
    manager_id = :manager_id
    where rowid = :rid""", manager_id=205, rid=rowid)

```

### 1.6.5 DML RETURNING Bind Variables

When a RETURNING clause is used with a DML statement like UPDATE, INSERT, or DELETE, the values are returned to the application through the use of OUT bind variables. Consider the following example:

```
# The RETURNING INTO bind variable is a string
dept_name = cursor.var(str)

cursor.execute("""
    update departments set
        location_id = :loc_id
    where department_id = :dept_id
    returning department_name into :dept_name""",
    loc_id=1700, dept_id=50, dept_name=dept_name)
print(dept_name.getvalue())      # will print ['Shipping']
```

In the above example, since the WHERE clause matches only one row, the output contains a single item in the list. If the WHERE clause matched multiple rows, however, the output would contain as many items as there were rows that were updated.

No duplicate binds are allowed in a DML statement with a RETURNING clause, and no duplication is allowed between bind variables in the DML section and the RETURNING section of the statement.

### 1.6.6 LOB Bind Variables

Database CLOBs, NCLOBs, BLOBs and BFILEs can be bound with types `cx_Oracle.CLOB`, `cx_Oracle.NCLOB`, `cx_Oracle.BLOB` and `cx_Oracle.BFILE` respectively. LOBs fetched from the database or created with `Connection.createlob()` can also be bound.

LOBs may represent Oracle Database persistent LOBs (those stored in tables) or temporary LOBs (such as those created with `Connection.createlob()` or returned by some SQL and PL/SQL operations).

LOBs can be used as IN, OUT or IN/OUT bind variables.

See *Using CLOB and BLOB Data* for examples.

### 1.6.7 REF CURSOR Bind Variables

cx\_Oracle provides the ability to bind and define PL/SQL REF cursors. As an example, consider the PL/SQL procedure:

```
CREATE OR REPLACE PROCEDURE find_employees (
    p_query IN VARCHAR2,
    p_results OUT SYS_REFCURSOR
) AS
BEGIN
    OPEN p_results FOR
        SELECT employee_id, first_name, last_name
        FROM employees
        WHERE UPPER(first_name || ' ' || last_name || ' ' || email)
            LIKE '%' || UPPER(p_query) || '%';
END;
/
```

A newly opened cursor can be bound to the REF CURSOR parameter, as shown in the following Python code. After the PL/SQL procedure has been called with `Cursor.callproc()`, the cursor can then be fetched just like any other cursor which had executed a SQL query:

```
refCursor = connection.cursor()
cursor.callproc("find_employees", ['Smith', refCursor])
```

(continues on next page)

(continued from previous page)

```
for row in refCursor:
    print(row)
```

With Oracle's sample HR schema there are two employees with the last name 'Smith' so the result is:

```
(159, 'Lindsey', 'Smith')
(171, 'William', 'Smith')
```

To return a REF CURSOR from a PL/SQL function, use `cx_Oracle.CURSOR` for the return type of `Cursor.callfunc()`:

```
refCursor = cursor.callfunc('example_package.f_get_cursor', cx_Oracle.CURSOR)
for row in refCursor:
    print(row)
```

## 1.6.8 Binding PL/SQL Collections

PL/SQL Collections like Associative Arrays can be bound as IN, OUT, and IN/OUT variables. When binding IN values, an array can be passed directly as shown in this example, which sums up the lengths of all of the strings in the provided array. First the PL/SQL package definition:

```
create or replace package mypkg as

    type udt_StringList is table of varchar2(100) index by binary_integer;

    function DemoCollectionIn (
        a_Values          udt_StringList
    ) return number;

end;
/

create or replace package body mypkg as

    function DemoCollectionIn (
        a_Values          udt_StringList
    ) return number is
        t_ReturnValue     number := 0;
    begin
        for i in 1..a_Values.count loop
            t_ReturnValue := t_ReturnValue + length(a_Values(i));
        end loop;
        return t_ReturnValue;
    end;

end;
/
```

Then the Python code:

```
values = ["String One", "String Two", "String Three"]
returnVal = cursor.callfunc("mypkg.DemoCollectionIn", int, [values])
print(returnVal)           # will print 32
```

In order get values back from the database, a bind variable must be created using `Cursor.arrayvar()`. The first parameter to this method is a Python type that cx\_Oracle knows how to handle or one of the cx\_Oracle *Types*. The second parameter is the maximum number of elements that the array can hold or an array providing the value (and indirectly the maximum length). The final parameter is optional and only used for strings and bytes. It identifies the maximum length of the strings and bytes that can be stored in the array. If not specified, the length defaults to 4000 bytes.

Consider the following PL/SQL package:

```
create or replace package mypkg as

    type udt_StringList is table of varchar2(100) index by binary_integer;

    procedure DemoCollectionOut (
        a_NumElements      number,
        a_Values            out nocopy udt_StringList
    );

    procedure DemoCollectionInOut (
        a_Values            in out nocopy udt_StringList
    );

end;
/

create or replace package body mypkg as

    procedure DemoCollectionOut (
        a_NumElements      number,
        a_Values            out nocopy udt_StringList
    ) is
    begin
        for i in 1..a_NumElements loop
            a_Values(i) := 'Demo out element #' || to_char(i);
        end loop;
    end;

    procedure DemoCollectionInOut (
        a_Values            in out nocopy udt_StringList
    ) is
    begin
        for i in 1..a_Values.count loop
            a_Values(i) := 'Converted element #' || to_char(i) ||
                ' originally had length ' || length(a_Values(i));
        end loop;
    end;

end;
/
```

The Python code to process an OUT collection would look as follows. Note the call to `Cursor.arrayvar()` which creates space for an array of strings. Each string would permit up to 100 bytes and only 10 strings would be permitted. If the PL/SQL block exceeds the maximum number of strings allowed the error ORA-06513: PL/SQL: index for PL/SQL table out of range for host language array would be raised.

```
outArrayVar = cursor.arrayvar(str, 10, 100)
cursor.callproc("mypkg.DemoCollectionOut", [5, outArrayVar])
for val in outArrayVar.getvalue():
```

(continues on next page)

(continued from previous page)

```
print(val)
```

This would produce the following output:

```
Demo out element #1
Demo out element #2
Demo out element #3
Demo out element #4
Demo out element #5
```

The Python code to process an IN/OUT collections is similar. Note the different call to `Cursor.arrayvar()` which creates space for an array of strings, but uses an array to determine both the maximum length of the array and its initial value.

```
inValues = ["String One", "String Two", "String Three", "String Four"]
inOutArrayVar = cursor.arrayvar(str, inValues)
cursor.callproc("mypkg.DemoCollectionInOut", [inOutArrayVar])
for val in inOutArrayVar.getvalue():
    print(val)
```

This would produce the following output:

```
Converted element #1 originally had length 10
Converted element #2 originally had length 10
Converted element #3 originally had length 12
Converted element #4 originally had length 11
```

If an array variable needs to have an initial value but also needs to allow for more elements than the initial value contains, the following code can be used instead:

```
inOutArrayVar = cursor.arrayvar(str, 10, 100)
inOutArrayVar.setvalue(0, ["String One", "String Two"])
```

All of the collections that have been bound in preceding examples have used contiguous array elements. If an associative array with sparse array elements is needed, a different approach is required. Consider the following PL/SQL code:

```
create or replace package mypkg as

    type udt_StringList is table of varchar2(100) index by binary_integer;

    procedure DemoCollectionOut (
        a_Value                                out nocopy udt_StringList
    );

end;
/

create or replace package body mypkg as

    procedure DemoCollectionOut (
        a_Value                                out nocopy udt_StringList
    ) is
    begin
        a_Value(-1048576) := 'First element';
        a_Value(-576) := 'Second element';
    end;

end;
```

(continues on next page)

(continued from previous page)

```

        a_Value(284) := 'Third element';
        a_Value(8388608) := 'Fourth element';
    end;

end;
/

```

Note that the collection element indices are separated by large values. The technique used above would fail with the exception `ORA-06513: PL/SQL: index for PL/SQL table out of range for host language array`. The code required to process this collection looks like this instead:

```

collectionType = connection.gettype("MYPKG.UDT_STRINGLIST")
collection = collectionType.newobject()
cursor.callproc("mypkg.DemoCollectionOut", [collection])
print(collection.asList())

```

This produces the output:

```
['First element', 'Second element', 'Third element', 'Fourth element']
```

Note the use of `Object.asList()` which returns the collection element values in index order as a simple Python list. The indices themselves are lost in this approach. Starting from `cx_Oracle 7.0`, the associative array can be turned into a Python dictionary using `Object.asdict()`. If that value was printed in the previous example instead, the output would be:

```

{-1048576: 'First element', -576: 'Second element', 284: 'Third element', 8388608:
->'Fourth element'}

```

If the elements need to be traversed in index order, the methods `Object.first()` and `Object.next()` can be used. The method `Object.getelement()` can be used to acquire the element at a particular index. This is shown in the following code:

```

ix = collection.first()
while ix is not None:
    print(ix, "->", collection.getelement(ix))
    ix = collection.next(ix)

```

This produces the output:

```

-1048576 -> First element
-576 -> Second element
284 -> Third element
8388608 -> Fourth element

```

Similarly, the elements can be traversed in reverse index order using the methods `Object.last()` and `Object.prev()` as shown in the following code:

```

ix = collection.last()
while ix is not None:
    print(ix, "->", collection.getelement(ix))
    ix = collection.prev(ix)

```

This produces the output:

```

8388608 -> Fourth element
284 -> Third element

```

(continues on next page)

(continued from previous page)

```
-576 -> Second element
-1048576 -> First element
```

## 1.6.9 Binding PL/SQL Records

PL/SQL record type objects can also be bound for IN, OUT and IN/OUT bind variables. For example:

```
create or replace package mypkg as

    type udt_DemoRecord is record (
        NumberValue          number,
        StringValue          varchar2(30),
        DateValue            date,
        BooleanValue         boolean
    );

    procedure DemoRecordsInOut (
        a_Value              in out nocopy udt_DemoRecord
    );

end;
/

create or replace package body mypkg as

    procedure DemoRecordsInOut (
        a_Value              in out nocopy udt_DemoRecord
    ) is
    begin
        a_Value.NumberValue := a_Value.NumberValue * 2;
        a_Value.StringValue := a_Value.StringValue || ' (Modified)';
        a_Value.DateValue   := a_Value.DateValue + 5;
        a_Value.BooleanValue := not a_Value.BooleanValue;
    end;

end;
/
```

Then this Python code can be used to call the stored procedure which will update the record:

```
# create and populate a record
recordType = connection.gettype("MYPKG.UDT_DEMORECORD")
record = recordType.newobject()
record.NUMBERVALUE = 6
record.STRINGVALUE = "Test String"
record.DATEVALUE = datetime.datetime(2016, 5, 28)
record.BOOLEANVALUE = False

# show the original values
print("NUMBERVALUE ->", record.NUMBERVALUE)
print("STRINGVALUE ->", record.STRINGVALUE)
print("DATEVALUE ->", record.DATEVALUE)
print("BOOLEANVALUE ->", record.BOOLEANVALUE)
print()
```

(continues on next page)

(continued from previous page)

```
# call the stored procedure which will modify the record
cursor.callproc("mypkg.DemoRecordsInOut", [record])

# show the modified values
print("NUMBERVALUE ->", record.NUMBERVALUE)
print("STRINGVALUE ->", record.STRINGVALUE)
print("DATEVALUE ->", record.DATEVALUE)
print("BOOLEANVALUE ->", record.BOOLEANVALUE)
```

This will produce the following output:

```
NUMBERVALUE -> 6
STRINGVALUE -> Test String
DATEVALUE -> 2016-05-28 00:00:00
BOOLEANVALUE -> False

NUMBERVALUE -> 12
STRINGVALUE -> Test String (Modified)
DATEVALUE -> 2016-06-02 00:00:00
BOOLEANVALUE -> True
```

Note that when manipulating records, all of the attributes must be set by the Python program in order to avoid an Oracle Client bug which will result in unexpected values or the Python application segfaulting.

## 1.6.10 Binding Spatial Datatypes

Oracle Spatial datatypes objects can be represented by Python objects and their attribute values can be read and updated. The objects can further be bound and committed to database. This is similar to the examples above.

An example of fetching SDO\_GEOMETRY is in *Oracle Database Objects and Collections*.

## 1.6.11 Changing Bind Data Types using an Input Type Handler

Input Type Handlers allow applications to change how data is bound to statements, or even to enable new types to be bound directly.

An input type handler is enabled by setting the attribute `Cursor.inputtypehandler` or `Connection.inputtypehandler`.

Input type handlers can be combined with variable converters to bind Python objects seamlessly:

```
# A standard Python object
class Building(object):
    def __init__(self, buildingId, description, numFloors, dateBuilt):
        self.buildingId = buildingId
        self.description = description
        self.numFloors = numFloors
        self.dateBuilt = dateBuilt

building = Building(1, "Skyscraper 1", 5, datetime.date(2001, 5, 24))

# Get Python representation of the Oracle user defined type UDT_BUILDING
objType = con.gettype("UDT_BUILDING")

# convert a Python Building object to the Oracle user defined type UDT_BUILDING
```

(continues on next page)



(continued from previous page)

```
def BuildingInConverter(value):
    obj = objType.newobject()
    obj.BUILDINGID = value.buildingId
    obj.DESCRPTION = value.description
    obj.NUMFLOORS = value.numFloors
    obj.DATEBUILT = value.dateBuilt
    return obj

def InputTypeHandler(cursor, value, numElements):
    if isinstance(value, Building):
        return cursor.var(cx_Oracle.OBJECT, arraysize = numElements,
                           inconverter = BuildingInConverter, typename = objType.name)

# With the input type handler, the bound Python object is converted
# to the required Oracle object before being inserted
cur.inputtypehandler = InputTypeHandler
cur.execute("insert into myTable values (:1, :2)", (1, building))
```

## 1.6.12 Binding Multiple Values to a SQL WHERE IN Clause

To use an IN clause with multiple values in a WHERE clause, you must define and bind multiple values. You cannot bind an array of values. For example:

```
cursor.execute("""
    select employee_id, first_name, last_name
    from employees
    where last_name in (:name1, :name2)""",
    name1="Smith", name2="Taylor")
for row in cursor:
    print(row)
```

This will produce the following output:

```
(159, 'Lindsey', 'Smith')
(171, 'William', 'Smith')
(176, 'Jonathon', 'Taylor')
(180, 'Winston', 'Taylor')
```

If this sort of query is executed multiple times with differing numbers of values, a bind variable should be included for each possible value up to the maximum number of values that can be provided. Missing values can be bound with the value None. For example, if the query above is used for up to 5 values, the code should be adjusted as follows:

```
cursor.execute("""
    select employee_id, first_name, last_name
    from employees
    where last_name in (:name1, :name2, :name3, :name4, :name5)""",
    name1="Smith", name2="Taylor", name3=None, name4=None, name5=None)
for row in cursor:
    print(row)
```

This will produce the same output as the original example.

If the number of values is only going to be known at runtime, then a SQL statement can be built up as follows:

```
bindValues = ["Gates", "Marvin", "Fay"]
bindNames = [":" + str(i + 1) for i in range(len(bindValues))]
sql = "select employee_id, first_name, last_name from employees " + \
      "where last_name in (%s)" % (",".join(bindNames))
cursor.execute(sql, bindValues)
for row in cursor:
    print(row)
```

Another solution for a larger number of values is to construct a SQL statement like:

```
SELECT ... WHERE col IN ( <something that returns a list of rows> )
```

The easiest way to do the ‘<something that returns a list of rows>’ will depend on how the data is initially represented and the number of items. You might look at using CONNECT BY or nested tables. Or, for really large numbers of items, you might prefer to use a global temporary table.

### 1.6.13 Binding Column and Table Names

Column and table names cannot be bound in SQL queries. You can concatenate text to build up a SQL statement, but make sure you use a white-list or other means to validate the data in order to avoid SQL Injection security issues:

```
tableWhiteList = ['employees', 'departments']
tableName = getTableName() # get the table name from user input
if tableName not in tableWhiteList:
    raise Exception('Invalid table name')
sql = 'select * from ' + tableName
```

Binding column names can be done either by using the above method or by using a CASE statement. The example below demonstrates binding a column name in an ORDER BY clause:

```
sql = """
    SELECT * FROM departments
    ORDER BY
        CASE :bindvar
            WHEN 'department_id' THEN DEPARTMENT_ID
            ELSE MANAGER_ID
        END"""

columnName = getColumnName() # Obtain a column name from the user
cursor.execute(sql, [colname])
```

Depending on the name provided by the user, the query results will be ordered either by the column DEPARTMENT\_ID or the column MANAGER\_ID.

## 1.7 Using CLOB and BLOB Data

Oracle Database uses *LOB Objects* to store large data such as text, images, videos and other multimedia formats. The maximum size of a LOB is limited to the size of the tablespace storing it.

There are four types of LOB (large object):

- BLOB - Binary Large Object, used for storing binary data. cx\_Oracle uses the type `cx_Oracle.BLOB`.
- CLOB - Character Large Object, used for string strings in the database character set format. cx\_Oracle uses the type `cx_Oracle.CLOB`.

- NCLOB - National Character Large Object, used for string strings in the national character set format. cx\_Oracle uses the type `cx_Oracle.NCLOB`.
- BFILE - External Binary File, used for referencing a file stored on the host operating system outside of the database. cx\_Oracle uses the type `cx_Oracle.BFILE`.

LOBs can be streamed to, and from, Oracle Database.

LOBs up to 1 GB in length can be also be handled directly as strings or bytes in cx\_Oracle. This makes LOBs easy to work with, and has significant performance benefits over streaming. However it requires the entire LOB data to be present in Python memory, which may not be possible.

See [GitHub](#) for LOB examples.

### 1.7.1 Simple Insertion of LOBs

Consider a table with CLOB and BLOB columns:

```
CREATE TABLE lob_tbl (
    id NUMBER,
    c CLOB,
    b BLOB
);
```

With cx\_Oracle, LOB data can be inserted in the table by binding strings or bytes as needed:

```
with open('example.txt', 'r') as f:
    textdata = f.read()

with open('image.png', 'rb') as f:
    imgdata = f.read()

cursor.execute("""
    insert into lob_tbl (id, c, b)
    values (:lobid, :clobdata, :blobdata)""",
    lobid=10, clobdata=textdata, blobdata=imgdata)
```

Note that with this approach, LOB data is limited to 1 GB in size.

### 1.7.2 Fetching LOBs as Strings and Bytes

CLOBs and BLOBs smaller than 1 GB can queried from the database directly as strings and bytes. This can be much faster than streaming.

A `Connection.outputtypehandler` or `Cursor.outputtypehandler` needs to be used as shown in this example:

```
def OutputTypeHandler(cursor, name, defaultType, size, precision, scale):
    if defaultType == cx_Oracle.CLOB:
        return cursor.var(cx_Oracle.LONG_STRING, arraysize=cursor.arraysize)
    if defaultType == cx_Oracle.BLOB:
        return cursor.var(cx_Oracle.LONG_BINARY, arraysize=cursor.arraysize)

idVal = 1
textData = "The quick brown fox jumps over the lazy dog"
bytesData = b"Some binary data"
cursor.execute("insert into lob_tbl (id, c, b) values (:1, :2, :3)",
```

(continues on next page)

(continued from previous page)

```

[idVal, textData, bytesData])

connection.outputtypehandler = OutputTypeHandler
cursor.execute("select c, b from lob_tbl where id = :1", [idVal])
clobData, blobData = cursor.fetchone()
print("CLOB length:", len(clobData))
print("CLOB data:", clobData)
print("BLOB length:", len(blobData))
print("BLOB data:", blobData)

```

This displays:

```

CLOB length: 43
CLOB data: The quick brown fox jumps over the lazy dog
BLOB length: 16
BLOB data: b'Some binary data'

```

### 1.7.3 Streaming LOBs (Read)

Without the output type handler, the CLOB and BLOB values are fetched as *LOB objects*. The size of the LOB object can be obtained by calling *LOB.size()* and the data can be read by calling *LOB.read()*:

```

idVal = 1
textData = "The quick brown fox jumps over the lazy dog"
bytesData = b"Some binary data"
cursor.execute("insert into lob_tbl (id, c, b) values (:1, :2, :3)",
               [idVal, textData, bytesData])

cursor.execute("select b, c from lob_tbl where id = :1", [idVal])
b, c = cursor.fetchone()
print("CLOB length:", c.size())
print("CLOB data:", c.read())
print("BLOB length:", b.size())
print("BLOB data:", b.read())

```

This approach produces the same results as the previous example but it will perform more slowly because it requires more round-trips to Oracle Database and has higher overhead. It is needed, however, if the LOB data cannot be fetched as one block of data from the server.

To stream the BLOB column, the *LOB.read()* method can be called repeatedly until all of the data has been read, as shown below:

```

cursor.execute("select b from lob_tbl where id = :1", [10])
blob, = cursor.fetchone()
offset = 1
numBytesInChunk = 65536
with open("image.png", "wb") as f:
    while True:
        data = blob.read(offset, numBytesInChunk)
        if data:
            f.write(data)
        if len(data) < numBytesInChunk:
            break
        offset += len(data)

```

### 1.7.4 Streaming LOBs (Write)

If a row containing a LOB is being inserted or updated, and the quantity of data that is to be inserted or updated cannot fit in a single block of data, the data can be streamed using the method `LOB.write()` instead as shown in the following code:

```
idVal = 9
lobVar = cursor.var(cx_Oracle.BLOB)
cursor.execute("""
    insert into lob_tbl (id, b)
    values (:1, empty_blob())
    returning b into :2""", [idVal, lobVar])
blob, = lobVar.getvalue()
offset = 1
numBytesInChunk = 65536
with open("image.png", "rb") as f:
    while True:
        data = f.read(numBytesInChunk)
        if data:
            blob.write(data, offset)
            if len(data) < numBytesInChunk:
                break
            offset += len(data)
connection.commit()
```

### 1.7.5 Temporary LOBs

All of the examples shown thus far have made use of permanent LOBs. These are LOBs that are stored in the database. Oracle also supports temporary LOBs that are not stored in the database but can be used to pass large quantities of data. These LOBs use space in the temporary tablespace until all variables referencing them go out of scope or the connection in which they are created is explicitly closed.

When calling PL/SQL procedures with data that exceeds 32,767 bytes in length, `cx_Oracle` automatically creates a temporary LOB internally and passes that value through to the procedure. If the data that is to be passed to the procedure exceeds that which can fit in a single block of data, however, you can use the method `Connection.createlob()` to create a temporary LOB. This LOB can then be read and written just like in the examples shown above for persistent LOBs.

## 1.8 Working with the JSON Data Type

Native support for JSON data was introduced in Oracle database 12c. You can use the relational database to store and query JSON data and benefit from the easy extensibility of JSON data while retaining the performance and structure of the relational database. JSON data is stored in the database in BLOB, CLOB or VARCHAR2 columns. For performance reasons, it is always a good idea to store JSON data in BLOB columns. To ensure that only JSON data is stored in that column, use a check constraint with the clause `is JSON` as shown in the following SQL to create a table containing JSON data:

```
create table customers (
    id integer not null primary key,
    json_data blob check (json_data is json)
);
```

The following Python code can then be used to insert some data into the database:

```
import json

customerData = dict(name="Rod", dept="Sales", location="Germany")
cursor.execute("insert into customers (id, json_data) values (:1, :2)",
               [1, json.dumps(customerData)])
```

The data can be retrieved in its entirety using the following code:

```
import json

for blob, in cursor.execute("select json_data from customers"):
    data = json.loads(blob.read())
    print(data["name"])      # will print Rod
```

If only the department needs to be read, the following code can be used instead:

```
for deptName, in cursor.execute("select c.json_data.dept from customers c"):
    print(deptName)          # will print Sales
```

You can convert the data stored in relational tables into JSON data by using the JSON\_OBJECT SQL operator. For example:

```
import json
cursor.execute("""
    select json_object(
        'id' value employee_id,
        'name' value (first_name || ' ' || last_name))
    from employees where rownum <= 3""")
for value, in cursor:
    print(json.loads(value,))
```

The result is:

```
{'id': 100, 'name': 'Steven King'}
{'id': 101, 'name': 'Neena Kochhar'}
{'id': 102, 'name': 'Lex De Haan'}
```

See [JSON Developer's Guide](#) for more information about using JSON in Oracle Database.

## 1.9 Simple Oracle Document Access (SODA)

### 1.9.1 Overview

Oracle Database Simple Oracle Document Access (SODA) allows documents to be inserted, queried, and retrieved from Oracle Database using a set of NoSQL-style cx\_Oracle methods. Documents are generally JSON data but they can be any data at all (including video, images, sounds, or other binary content). Documents can be fetched from the database by key lookup or by using query-by-example (QBE) pattern-matching.

SODA uses a SQL schema to store documents but you do not need to know SQL or how the documents are stored. However, access via SQL does allow use of advanced Oracle Database functionality such as analytics for reporting.

For general information on SODA, see the [SODA home page](#) and [Oracle Database Introduction to SODA](#).

cx\_Oracle uses the following objects for SODA:

- *SODA Database Object*: The top level object for cx\_Oracle SODA operations. This is acquired from an Oracle Database connection. A ‘SODA database’ is an abstraction, allowing access to SODA collections in that ‘SODA database’, which then allow access to documents in those collections. A SODA database is analogous to an Oracle Database user or schema, a collection is analogous to a table, and a document is analogous to a table row with one column for a unique document key, a column for the document content, and other columns for various document attributes.
- *SODA Collection Object*: Represents a collection of SODA documents. By default, collections allow JSON documents to be stored. This is recommended for most SODA users. However optional metadata can set various details about a collection, such as its database storage, whether it should track version and time stamp document components, how such components are generated, and what document types are supported. By default, the name of the Oracle Database table storing a collection is the same as the collection name. Note: do not use SQL to drop the database table, since SODA metadata will not be correctly removed. Use the `SodaCollection.drop()` method instead.
- *SODA Document Object*: Represents a document. Typically the document content will be JSON. The document has properties including the content, a key, timestamps, and the media type. By default, document keys are automatically generated. See *SODA Document objects* for the forms of SodaDoc.
- *SODA Document Cursor*: A cursor object representing the result of the `SodaOperation.getCursor()` method from a `SodaCollection.find()` operation. It can be iterated over to access each SodaDoc.
- *SODA Operation Object*: An internal object used with `SodaCollection.find()` to perform read and write operations on documents. Chained methods set properties on a SodaOperation object which is then used by a terminal method to find, count, replace, or remove documents. This is an internal object that should not be directly accessed.

## 1.9.2 SODA Example

Creating and adding documents to a collection can be done as follows:

```
soda = connection.getSodaDatabase()

# create a new SODA collection; this will open an existing collection, if
# the name is already in use
collection = soda.createCollection("mycollection")

# insert a document into the collection; for the common case of a JSON
# document, the content can be a simple Python dictionary which will
# internally be converted to a JSON document
content = {'name': 'Matilda', 'address': {'city': 'Melbourne'}}
returnedDoc = collection.insertOneAndGet(content)
key = returnedDoc.key
print('The key of the new SODA document is: ', key)
```

By default, a system generated key is created when documents are inserted. With a known key, you can retrieve a document:

```
# this will return a dictionary (as was inserted in the previous code)
content = collection.find().key(key).getOne().getContent()
print(content)
```

You can also search for documents using query-by-example syntax:

```
# Find all documents with names like 'Ma%'
print("Names matching 'Ma%'")
```

(continues on next page)

(continued from previous page)

```

qbe = {'name': {'$like': 'Ma%'}}
for doc in collection.find().filter(qbe).getDocuments():
    content = doc.getContent()
    print(content["name"])

```

See the [samples directory](#) for runnable SODA examples.

## 1.10 Working with XMLTYPE

Oracle XMLType columns are fetched as strings by default. This is currently limited to the maximum length of a VARCHAR2 column. To return longer XML values, they must be queried as LOB values instead.

The examples below demonstrate using XMLType data with cx\_Oracle. The following table will be used in these examples:

```

CREATE TABLE xml_table (
    id NUMBER,
    xml_data SYS.XMLTYPE
);

```

Inserting into the table can be done by simply binding a string as shown:

```

xmlData = """<?xml version="1.0"?>
    <customer>
        <name>John Smith</name>
        <Age>43</Age>
        <Designation>Professor</Designation>
        <Subject>Mathematics</Subject>
    </customer>"""
cursor.execute("insert into xml_table values (:id, :xml)",
    id=1, xml=xmlData)

```

This approach works with XML strings up to 1 GB in size. For longer strings, a temporary CLOB must be created using `Connection.createlob()` and bound as shown:

```

clob = connection.createlob(cx_Oracle.CLOB)
clob.write(xmlData)
cursor.execute("insert into xml_table values (:id, sys.xmltype(:xml))",
    id=2, xml=clob)

```

Fetching XML data can be done simply for values that are shorter than the length of a VARCHAR2 column, as shown:

```

cursor.execute("select xml_data from xml_table where id = :id", id=1)
xmlData, = cursor.fetchone()
print(xmlData)           # will print the string that was originally stored

```

For values that exceed the length of a VARCHAR2 column, a CLOB must be returned instead by using the function `XMLTYPE.GETCLOBVAL()` as shown:

```

cursor.execute("""
    select xmltype.getclobval(xml_data)
    from xml_table
    where id = :id""", id=1)
clob, = cursor.fetchone()
print(clob.read())

```



The LOB that is returned can be streamed or a string can be returned instead of a CLOB. See *Using CLOB and BLOB Data* for more information about processing LOBs.

## 1.11 Batch Statement Execution and Bulk Loading

Inserting or updating multiple rows can be performed efficiently with `Cursor.executemany()`, making it easy to work with large data sets with cx\_Oracle. This method can significantly outperform repeated calls to `Cursor.execute()` by reducing network transfer costs and database load. The `executemany()` method can also be used to execute PL/SQL statements multiple times at once.

There are examples in the [GitHub examples](#) directory.

The following tables will be used in the samples that follow:

```
create table ParentTable (
    ParentId          number(9) not null,
    Description        varchar2(60) not null,
    constraint ParentTable_pk primary key (ParentId)
);

create table ChildTable (
    ChildId           number(9) not null,
    ParentId           number(9) not null,
    Description        varchar2(60) not null,
    constraint ChildTable_pk primary key (ChildId),
    constraint ChildTable_fk foreign key (ParentId)
                        references ParentTable
);
```

### 1.11.1 Batch Execution of SQL

The following example inserts five rows into the table `ParentTable`:

```
dataToInsert = [
    (10, 'Parent 10'),
    (20, 'Parent 20'),
    (30, 'Parent 30'),
    (40, 'Parent 40'),
    (50, 'Parent 50')
]
cursor.executemany("insert into ParentTable values (:1, :2)", dataToInsert)
```

This code requires only one round-trip from the client to the database instead of the five round-trips that would be required for repeated calls to `execute()`. For very large data sets there may be an external buffer or network limits to how many rows can be processed, so repeated calls to `executemany()` may be required. The limits are based on both the number of rows being processed as well as the “size” of each row that is being processed. Repeated calls to `executemany()` are still better than repeated calls to `execute()`.

### 1.11.2 Batch Execution of PL/SQL

PL/SQL functions and procedures and anonymous PL/SQL blocks can also be called using `executemany()` in order to improve performance. For example:

```
dataToInsert = [
    (10, 'Parent 10'),
    (20, 'Parent 20'),
    (30, 'Parent 30'),
    (40, 'Parent 40'),
    (50, 'Parent 50')
]
cursor.executemany("begin mypkg.create_parent(:1, :2); end;", dataToInsert)
```

Note that the `batcherrors` parameter (discussed below) cannot be used with PL/SQL block execution.

### 1.11.3 Handling Data Errors

Large datasets may contain some invalid data. When using batch execution as discussed above, the entire batch will be discarded if a single error is detected, potentially eliminating the performance benefits of batch execution and increasing the complexity of the code required to handle those errors. If the parameter `batchErrors` is set to the value `True` when calling `executemany()`, however, processing will continue even if there are data errors in some rows, and the rows containing errors can be examined afterwards to determine what course the application should take. Note that if any errors are detected, a transaction will be started but not committed, even if `Connection.autocommit` is set to `True`. After examining the errors and deciding what to do with them, the application needs to explicitly commit or roll back the transaction with `Connection.commit()` or `Connection.rollback()`, as needed.

This example shows how data errors can be identified:

```
dataToInsert = [
    (60, 'Parent 60'),
    (70, 'Parent 70'),
    (70, 'Parent 70 (duplicate)'),
    (80, 'Parent 80'),
    (80, 'Parent 80 (duplicate)'),
    (90, 'Parent 90')
]
cursor.executemany("insert into ParentTable values (:1, :2)", dataToInsert,
    batcherrors=True)
for error in cursor.getbatcherrors():
    print("Error", error.message, "at row offset", error.offset)
```

The output is:

```
Error ORA-00001: unique constraint (PYTHONDEMO.PARENTTABLE_PK) violated at row offset_
↪2
Error ORA-00001: unique constraint (PYTHONDEMO.PARENTTABLE_PK) violated at row offset_
↪4
```

The row offset is the index into the array of the data that could not be inserted due to errors. The application could choose to commit or rollback the other rows that were successfully inserted. Alternatively, it could correct the data for the two invalid rows and attempt to insert them again before committing.

### 1.11.4 Identifying Affected Rows

When executing a DML statement using `execute()`, the number of rows affected can be examined by looking at the attribute `rowcount`. When performing batch executing with `Cursor.executemany()`, however, the row count will return the *total* number of rows that were affected. If you want to know the total number of rows affected by each row of data that is bound you must set the parameter `arraydmlrowcounts` to `True`, as shown:

```
parentIdsToDelete = [20, 30, 50]
cursor.executemany("delete from ChildTable where ParentId = :1",
    [(i,) for i in parentIdsToDelete],
    arraydmlrowcounts=True)
rowCounts = cursor.getarraydmlrowcounts()
for parentId, count in zip(parentIdsToDelete, rowCounts):
    print("Parent ID:", parentId, "deleted", count, "rows.")
```

Using the data found in the [GitHub samples](#) the output is as follows:

```
Parent ID: 20 deleted 3 rows.
Parent ID: 30 deleted 2 rows.
Parent ID: 50 deleted 4 rows.
```

### 1.11.5 DML RETURNING

DML statements like INSERT, UPDATE, DELETE and MERGE can return values by using the DML RETURNING syntax. A bind variable can be created to accept this data. See [Using Bind Variables](#) for more information.

If, instead of merely deleting the rows as shown in the previous example, you also wanted to know some information about each of the rows that were deleted, you could use the following code:

```
parentIdsToDelete = [20, 30, 50]
childIdVar = cursor.var(int, arraysize=len(parentIdsToDelete))
cursor.setinputsizes(None, childIdVar)
cursor.executemany("""
    delete from ChildTable
    where ParentId = :1
    returning ChildId into :2""",
    [(i,) for i in parentIdsToDelete])
for ix, parentId in enumerate(parentIdsToDelete):
    print("Child IDs deleted for parent ID", parentId, "are",
        childIdVar.getvalue(ix))
```

The output would then be:

```
Child IDs deleted for parent ID 20 are [1002, 1003, 1004]
Child IDs deleted for parent ID 30 are [1005, 1006]
Child IDs deleted for parent ID 50 are [1012, 1013, 1014, 1015]
```

Note that the bind variable created to accept the returned data must have an arraysize large enough to hold data for each row that is processed. Also, the call to `Cursor.setinputsizes()` binds this variable immediately so that it does not have to be passed in each row of data.

### 1.11.6 Predefining Memory Areas

When multiple rows of data are being processed there is the possibility that the data is not uniform in type and size. In such cases, cx\_Oracle makes some effort to accommodate such differences. Type determination for each column is deferred until a value that is not None is found in the column's data. If all values in a particular column are None, then cx\_Oracle assumes the type is a string and has a length of 1. cx\_Oracle will also adjust the size of the buffers used to store strings and bytes when a longer value is encountered in the data. These sorts of operations incur overhead as memory has to be reallocated and data copied. To eliminate this overhead, using `setinputsizes()` tells cx\_Oracle about the type and size of the data that is going to be used.

Consider the following code:

```

data = [
    ( 110, "Parent 110"),
    ( 2000, "Parent 2000"),
    ( 30000, "Parent 30000"),
    ( 400000, "Parent 400000"),
    (5000000, "Parent 5000000")
]
cursor.setinputsizes(None, 20)
cursor.executemany("""
    insert into ParentTable (ParentId, Description)
    values (:1, :2)""", data)

```

In this example, without the call to `setinputsizes()`, cx\_Oracle would perform five allocations of increasing size as it discovered each new, longer string. However `cursor.setinputsizes(None, 20)` tells cx\_Oracle that the maximum size of the strings that will be processed is 20 characters. Since cx\_Oracle allocates memory for each row based on this value, it is best not to oversize it. The first parameter of `None` tells cx\_Oracle that its default processing will be sufficient.

### 1.11.7 Loading CSV Files into Oracle Database

The `Cursor.executemany()` method and `csv` module can be used to efficiently load CSV (Comma Separated Values) files. For example, consider the file `data.csv`:

```

101,Abel
154,Baker
132,Charlie
199,Delta
. . .

```

And the schema:

```

create table test (id number, name varchar2(25));

```

Instead of looping through each line of the CSV file and inserting it individually, you can insert batches of records using `Cursor.executemany()`:

```

import cx_Oracle
import csv

. . .

# Predefine the memory areas to match the table definition
cursor.setinputsizes(None, 25)

# Adjust the batch size to meet your memory and performance requirements
batch_size = 10000

with open('testsp.csv', 'r') as csv_file:
    csv_reader = csv.reader(csv_file, delimiter=',')
    sql = "insert into test (id,name) values (:1, :2)"
    data = []
    for line in csv_reader:
        data.append((line[0], line[1]))
        if len(data) % batch_size == 0:
            cursor.executemany(sql, data)

```

(continues on next page)

(continued from previous page)

```

        data = []
    if data:
        cursor.executemany(sql, data)
    con.commit()

```

## 1.12 Exception Handling

All exceptions raised by cx\_Oracle are inherited from `cx_Oracle.Error`. See *Exceptions* for more details on the various exceptions defined by cx\_Oracle. See the exception handling section in the *API manual* for more details on the information available when an exception is raised.

Applications can catch exceptions as needed. For example, when trying to add a customer that already exists in the database, the following could be used to catch the exception:

```

try:
    cursor.execute("insert into customer values (101, 'Customer A')")
except cx_Oracle.IntegrityError:
    print("Customer ID already exists")
else:
    print("Customer added")

```

If information about the exception needs to be processed instead, the following code can be used:

```

try:
    cursor.execute("insert into customer values (101, 'Customer A')")
except cx_Oracle.IntegrityError as e:
    errorObj, = e.args
    print("Customer ID already exists")
    print("Error Code:", errorObj.code)
    print("Error Message:", errorObj.message)
else:
    print("Customer added")

```

## 1.13 Oracle Advanced Queuing (AQ)

Oracle Advanced Queuing is a highly configurable and scalable messaging feature of Oracle Database. It has interfaces in various languages, letting you integrate multiple tools in your architecture.

cx\_Oracle 7.2 introduced an updated interface for Oracle Advanced Queuing.

There are Advanced Queuing examples in the [GitHub examples](#) directory.

### 1.13.1 Creating a Queue

Before being used, queues need to be created in the database, for example in SQL\*Plus:

```

begin
    dbms_aqadm.create_queue_table('MY_QUEUE_TABLE', 'RAW');
    dbms_aqadm.create_queue('DEMO_RAW_QUEUE', 'MY_QUEUE_TABLE');
    dbms_aqadm.start_queue('DEMO_RAW_QUEUE');

```

(continues on next page)

(continued from previous page)

```
end;
/
```

This examples creates a RAW queue suitable for sending string or raw bytes messages.

### 1.13.2 Enqueuing Messages

To send messages in Python you connect and get a *queue*. The queue can be used for enqueueing, dequeuing, or both as needed.

```
queue = connection.queue("DEMO_RAW_QUEUE")
```

Now messages can be queued using *Queue.enqueue()*. To send three messages:

```
PAYLOAD_DATA = [
    "The first message",
    "The second message",
    "The third message"
]
for data in PAYLOAD_DATA:
    queue.enqueue(connection.msgproperties(payload=data))
connection.commit()
```

Since the queue sending the messages is a RAW queue, the strings in this example will be internally encoded to bytes using *Connection.encoding* before being enqueued.

### 1.13.3 Dequeuing Messages

Dequeuing is performed similarly. To dequeue a message call the method *Queue.dequeue()* as shown. Note that if the message is expected to be a string, the bytes must be decoded using *Connection.encoding*.

```
queue = connection.queue("DEMO_RAW_QUEUE")
msg = queue.dequeue()
connection.commit()
print(msg.payload.decode(connection.encoding))
```

### 1.13.4 Using Object Queues

Named Oracle objects can be enqueued and dequeued as well. Given an object type called UDT\_BOOK:

```
CREATE OR REPLACE TYPE udt_book AS OBJECT (
    Title    VARCHAR2(100),
    Authors  VARCHAR2(100),
    Price    NUMBER(5,2)
);
/
```

And a queue that accepts this type:

```
begin
    dbms_aqadm.create_queue_table('BOOK_QUEUE_TAB', 'UDT_BOOK');
    dbms_aqadm.create_queue('DEMO_BOOK_QUEUE', 'BOOK_QUEUE_TAB');
```

(continues on next page)

(continued from previous page)

```
dbms_aqadm.start_queue('DEMO_BOOK_QUEUE');
end;
/
```

You can queue messages:

```
booksType = connection.gettype("UDT_BOOK")
queue = connection.queue("DEMO_BOOK_QUEUE", booksType)

book = booksType.newobject()
book.TITLE = "Quick Brown Fox"
book.AUTHORS = "The Dog"
book.PRICE = 123

queue.enqOne(connection.msgproperties(payload=book))
connection.commit()
```

Dequeuing is done like this:

```
booksType = connection.gettype("UDT_BOOK")
queue = connection.queue("DEMO_BOOK_QUEUE", booksType)

msg = queue.deqOne()
connection.commit()
print(msg.payload.TITLE)           # will print Quick Brown Fox
```

### 1.13.5 Changing Queue and Message Options

Refer to the *cx\_Oracle AQ API* and *Oracle Advanced Queuing* documentation for details on all of the enqueue and dequeue options available.

Enqueue options can be set. For example, to make it so that an explicit call to `commit()` on the connection is not needed to commit messages:

```
queue = connection.queue("DEMO_RAW_QUEUE")
queue.enqOptions.visibility = cx_Oracle.ENQ_IMMEDIATE
```

Dequeue options can also be set. For example, to specify not to block on dequeuing if no messages are available:

```
queue = connection.queue("DEMO_RAW_QUEUE")
queue.deqOptions.wait = cx_Oracle.DEQ_NO_WAIT
```

Message properties can be set when enqueueing. For example, to set an expiration of 60 seconds on a message:

```
queue.enqOne(connection.msgproperties(payload="Message", expiration=60))
```

This means that if no dequeue operation occurs within 60 seconds that the message will be dropped from the queue.

### 1.13.6 Bulk Enqueue and Dequeue

The `Queue.enqueueMany()` and `Queue.dequeueMany()` methods can be used for efficient bulk message handling.

`Queue.enqueueMany()` is similar to `Queue.enqueueOne()` but accepts an array of messages:

```
messages = [
    "The first message",
    "The second message",
    "The third message",
]
queue = connection.queue("DEMO_RAW_QUEUE")
queue.enqueueMany(connection.msgproperties(payload=m) for m in messages)
connection.commit()
```

Warning: calling `Queue.enqueueMany()` in parallel on different connections acquired from the same pool may fail due to Oracle bug 29928074. Ensure that this function is not run in parallel, use standalone connections or connections from different pools, or make multiple calls to `Queue.enqueueOne()` instead. The function `Queue.dequeueMany()` call is not affected.

To dequeue multiple messages at one time, use `Queue.dequeueMany()`. This takes an argument specifying the maximum number of messages to dequeue at one time:

```
for m in queue.dequeueMany(maxMessages=10):
    print(m.payload.decode(connection.encoding))
```

Depending on the queue properties and the number of messages available to dequeue, this code will print out from zero to ten messages.

## 1.14 Continuous Query Notification (CQN)

Continuous Query Notification (CQN) allows applications to receive notifications when a table changes, such as when rows have been updated, regardless of the user or the application that made the change. This can be useful in many circumstances, such as near real-time monitoring, auditing applications, or for such purposes as mid-tier cache invalidation. A cache might hold some values that depend on data in a table. If the data in the table changes, the cached values must then be updated with the new information.

CQN notification behavior is widely configurable. Choices include specifying what types of SQL should trigger a notification, whether notifications should survive database loss, and control over unsubscribing. You can also choose whether notification messages will include ROWIDs of affected rows.

By default, object-level (previously known as Database Change Notification) occurs and the Python notification method is invoked whenever a database transaction is committed that changes an object that a registered query references, regardless of whether the actual query result changed. However if the `subscription` option `qos` is `cx_Oracle.SUBSCR_QOS_QUERY` then query-level notification occurs. In this mode, the database notifies the application whenever a transaction changing the result of the registered query is committed.

CQN is best used to track infrequent data changes.

### 1.14.1 Requirements

Before using CQN, users must have appropriate permissions:

```
GRANT CHANGE NOTIFICATION TO <user-name>;
```

To use CQN, connections must have `events` mode set to `True`, for example:

```
connection = cx_Oracle.connect(userName, password, "dbhost.example.com/orclpdb1",
    ↪events=True)
```



The default CQN connection mode means the database must be able to connect back to the application using cx\_Oracle in order to receive notification events. Alternatively, when using Oracle Database and Oracle client libraries 19.4, or later, subscriptions can set the optional `clientInitiated` parameter to `True`, see `Connection.subscribe()` below.

The default CQN connection mode typically means that the machine running cx\_Oracle needs a fixed IP address. Note `Connection.subscribe()` does not verify that this reverse connection is possible. If there is any problem sending a notification, then the callback method will not be invoked. Configuration options can include an IP address and port on which cx\_Oracle will listen for notifications; otherwise, the database chooses values.

## 1.14.2 Creating a Subscription

Subscriptions allow Python to receive notifications for events that take place in the database that match the given parameters.

For example, a basic CQN subscription might be created like:

```
connection.subscribe(namespace=cx_Oracle.SUBSCR_NAMESPACE_DBCHANGE,
                    callback=MyCallback)
```

See `Connection.subscribe()` for details on all of the parameters.

See *Operation Codes* for the types of operations that are supported.

See *Subscription Quality of Service* for the quality of service values that are supported.

See *Subscription Namespaces* and *Subscription Protocols* for the namespaces and protocols that are supported.

See *Subscription Object* for more details on the subscription object that is created.

When using Oracle Database and Oracle client libraries 19.4, or later, the optional subscription parameter `clientInitiated` can be set:

```
connection.subscribe(namespace= . . ., callback=MyCallback, clientInitiated=True)
```

This enables CQN “client initiated” connections which internally use the same approach as normal cx\_Oracle connections to the database, and do not require the database to be able to connect back to the application. Since client initiated connections do not need special network configuration they have ease-of-use and security advantages.

## 1.14.3 Registering Queries

Once a subscription has been created, one or more queries must be registered by calling `Subscription.registerquery()`. Registering a query behaves similarly to `Cursor.execute()`, but only queries are permitted and the `args` parameter must be a sequence or dictionary.

An example script to receive query notifications when the ‘CUSTOMER’ table data changes is:

```
def CQNCallback(message):
    print("Notification:")
    for query in message.queries:
        for tab in query.tables:
            print("Table:", tab.name)
            print("Operation:", tab.operation)
            for row in tab.rows:
                if row.operation & cx_Oracle.OPCODE_INSERT:
                    print("INSERT of rowid:", row.rowid)
                if row.operation & cx_Oracle.OPCODE_DELETE:
```

(continues on next page)

(continued from previous page)

```

        print("DELETE of rowid:", row.rowid)

subscr = connection.subscribe(namespace=cx_Oracle.SUBSCR_NAMESPACE_DBCHANGE,
                              callback=CQNCallback,
                              operations=cx_Oracle.OPCODE_INSERT | cx_Oracle.OPCODE_DELETE,
                              qos = cx_Oracle.SUBSCR_QOS_QUERY | cx_Oracle.SUBSCR_QOS_ROWIDS)
subscr.registerquery("select * from regions")
input("Hit enter to stop CQN demo\n")

```

Running the above script, shows the initial output as:

```
Hit enter to stop CQN demo
```

Use SQL\*Plus or another tool to commit a change to the table:

```

insert into regions values (120, 'L');
commit;

```

When the commit is executed, a notification will be received by the callback which should print something like the following:

```

Hit enter to stop CQN demo
Notification:
Table: HR.REGIONS
Operation: 2
INSERT of rowid: AAA7EsAAHAAAFS/AAA

```

See [GitHub Samples](#) for a runnable CQN example.

## 1.15 Transaction Management

A database transaction is a grouping of SQL statements that make a logical data change to the database.

When `Cursor.execute()` executes a SQL statement, a transaction is started or continued. By default, `cx_Oracle` does not commit this transaction to the database. The methods `Connection.commit()` and `Connection.rollback()` methods can be used to explicitly commit or rollback a transaction:

```

cursor.execute("INSERT INTO mytab (name) VALUES ('John')")
connection.commit()

```

When a database connection is closed, such as with `Connection.close()`, or when variables referencing the connection go out of scope, any uncommitted transaction will be rolled back.

### 1.15.1 Autocommitting

An alternative way to commit is to set the attribute `autocommit` of the connection to `True`. This ensures all *DML* statements (INSERT, UPDATE etc) are committed as they are executed. Unlike `Connection.commit()`, this does not require an additional round-trip to the database so it is more efficient when used appropriately.

Note that irrespective of the autocommit value, Oracle Database will always commit an open transaction when a DDL statement is executed.

When executing multiple DML statements that constitute a single transaction, it is recommended to use autocommit mode only for the last DML statement in the sequence of operations. Unnecessarily committing causes extra database load, and can destroy transactional consistency.

The example below shows a new customer being added to the table CUST\_TABLE. The corresponding SALES table is updated with a purchase of 3000 pens from the customer. The final insert uses autocommit mode to commit both new records:

```
# Add a new customer
idVar = cursor.var(int)
connection.autocommit = False # make sure any previous value is off
cursor.execute("""
    INSERT INTO cust_table (name) VALUES ('John')
    RETURNING id INTO :bvid""", bvid=idVar)

# Add sales data for the new customer and commit all new values
idVal = idVar.getvalue()[0]
connection.autocommit = True
cursor.execute("INSERT INTO sales_table VALUES (:bvid, 'pens', 3000)",
    bvid=idVal)
```

## 1.15.2 Explicit Transactions

The method `Connection.begin()` can be used to explicitly start a local or global transaction.

Without parameters, this explicitly begins a local transaction; otherwise, this explicitly begins a distributed (global) transaction with the given parameters. See the Oracle documentation for more details.

Note that in order to make use of global (distributed) transactions, the attributes `Connection.internal_name` and `Connection.external_name` attributes must be set.

## 1.16 Characters Sets and National Language Support (NLS)

Data fetched from, and sent to, Oracle Database will be mapped between the database character set and the “Oracle client” character set of the Oracle client libraries used by cx\_Oracle. If data cannot be correctly mapped between client and server character sets, then it may be corrupted or queries may fail with “*codec can’t decode byte*”. Most applications will need to specify the client character set.

cx\_Oracle uses Oracle’s National Language Support (NLS) to assist in globalizing applications. As well as character set support, there are many other features that will be useful in applications. See the [Database Globalization Support Guide](#).

### 1.16.1 Setting the Client Character Set

You can specify the Oracle client character set used by cx\_Oracle by passing the `encoding` and `nencoding` parameters to the `cx_Oracle.connect()` and `cx_Oracle.SessionPool()` methods. For example:

```
import cx_Oracle
connection = cx_Oracle.connect(connectString, encoding="UTF-8",
    nencoding="UTF-8")
```

The `encoding` parameter affects character data such as VARCHAR2 and CLOB columns. The `nencoding` parameter affects “National Character” data such as NVARCHAR2 and NCLOB. If you are not using national character types, then you can omit `nencoding`. Both the `encoding` and `nencoding` parameters are expected to be one of

the Python standard encodings such as UTF-8. Do not accidentally use UTF8, which Oracle uses to specify the older Unicode 3.0 Universal character set, CESU-8. Note that Oracle does not recognize all of the encodings that Python recognizes. You can see which encodings Oracle supports by issuing this query:

```
select distinct utl_i18n.map_charset(value)
from v$nls_valid_values
where parameter = 'CHARACTERSET'
and utl_i18n.map_charset(value) is not null
order by 1
```

An alternative to setting the encoding parameters is to set Oracle's NLS\_LANG environment variable to a value such as AMERICAN\_AMERICA.AL32UTF8. See [Setting environment variables](#). As well as setting the character set, the NLS\_LANG environment variable lets you specify the Language (AMERICAN in this example) and Territory (AMERICA) used for NLS globalization. See [Choosing a Locale with the NLS\\_LANG Environment Variables](#).

A character set specified by an encoding parameter will override the character set in NLS\_LANG. The language and territory components will still be used by Oracle.

If the NLS\_LANG environment variable is set in the application with `os.environ['NLS_LANG']`, it must be set before any connection pool is created, or before any standalone connections are created.

If neither of the encoding parameters are specified and the NLS\_LANG environment variable is not set, the character set ASCII is used.

Other Oracle globalization variable can also be set, see [Setting NLS Parameters](#).

## 1.16.2 Character Set Example

The script below tries to display data containing a Euro symbol from the database. The NLS\_LANG environment variable on the operating system is set to AMERICAN\_AMERICA.WE8ISO8859P1:

```
connection = cx_Oracle.connect(userName, password, "dbhost.example.com/orclpdb1")
cursor = connection.cursor()
for row in cursor.execute("select * from nchar_test"):
    print(row)
print(connection.encoding)
print(connection.nencoding)
```

Because the '€' symbol is not supported by the WE8ISO8859P1 character set, all '€' characters are replaced by '¿' in the cx\_Oracle output:

```
('¿', 'test', 'test', 'test')
('¿', 'test', '¿', 'test')
('nvarchar', '/nchar', 'varchardata', 'chardata')
('°', 'Second', 'Third', 'Fourth')
ISO-8859-1
ISO-8859-1
```

When the encoding parameter is set during connection:

```
connection = cx_Oracle.connect(userName, password, "dbhost.example.com/orclpdb1",
                               encoding="UTF-8", nencoding="UTF-8")
```

Then the output displays the Euro symbol as desired:

```
('€', 'test', 'test', 'test')
('€', 'test', '€', 'test')
```

(continues on next page)

(continued from previous page)

```
( 'nvarchar', '/nchar', 'varchardata', 'chardata' )
( 'o', 'Second', 'Third', 'Fourth' )
UTF-8
UTF-8
```

### 1.16.3 Finding the Database and Client Character Set

To find the database character set, execute the query:

```
SELECT value AS db_charset
FROM nls_database_parameters
WHERE parameter = 'NLS_CHARACTERSET';
```

To find the database ‘national character set’ used for NCHAR and related types, execute the query:

```
SELECT value AS db_ncharset
FROM nls_database_parameters
WHERE parameter = 'NLS_NCHAR_CHARACTERSET';
```

To find the current “client” character set used by cx\_Oracle, execute the query:

```
SELECT DISTINCT client_charset AS client_charset
FROM v$session_connect_info
WHERE sid = SYS_CONTEXT('USERENV', 'SID');
```

If these character sets do not match, characters will be mapped when transferred over Oracle Net. This may impact performance and may result in invalid data.

## 1.17 High Availability with cx\_Oracle

Applications can utilize many features for high availability (HA) during planned and unplanned outages in order to:

- Reduce application downtime
- Eliminate compromises between high availability and performance
- Increase operational productivity

### 1.17.1 General HA Recommendations

General recommendations for creating highly available cx\_Oracle programs are:

- Tune operating system and Oracle Network parameters to avoid long TCP timeouts, to prevent firewalls killing connections, and to avoid connection storms.
- Implement application error handling and recovery.
- Use the most recent version of the Oracle client libraries. New versions have improvements to features such as dead database server detection, and make it easier to set connection options.
- Use the most recent version of Oracle Database. New database versions introduce, and enhance, features such as Application Continuity (AC) and Transparent Application Continuity (TAC).
- Utilize Oracle Database technologies such as [RAC](#) or standby databases.

- Configure database services to emit *FAN* events.
- Use a *connection pool*, because pools can handle database events and take proactive and corrective action for draining, run time load balancing, and fail over. Set the minimum and maximum pool sizes to the same values to avoid connection storms. Remove resource manager or user profiles that prematurely close sessions.
- Test all scenarios thoroughly.

## 1.17.2 Network Configuration

The operating system TCP and *Oracle Net configuration* should be configured for performance and availability.

Options such as `SQLNET.CONNECT_TIMEOUT`, `SQLNET.RECV_TIMEOUT` and `SQLNET.SEND_TIMEOUT` can be explored.

*Oracle Net Services* options may also be useful for high availability and performance tuning. For example the database's *listener.ora* file can have `RATE_LIMIT` and `QUEUESIZE` parameters that can help handle connection storms.

When cx\_Oracle uses *Oracle Client libraries 19c*, then the *Easy Connect Plus syntax* syntax enables some options to be used without needing a `sqlnet.ora` file. For example, if your firewall times out every 4 minutes, and you cannot alter the firewall settings, then you may decide to use `EXPIRE_TIME` in your connect string to send a probe every 2 minutes to the database to keep connections 'alive':

```
connection = cx_Oracle.connect("hr", userpwd, "dbhost.example.com/orclpdb1?expire_
↪time=2")
```

## 1.17.3 Fast Application Notification (FAN)

Users of *Oracle Database FAN* must connect to a FAN-enabled database service. The application should have `events` set to `True` when connecting. This value can also be changed via *Oracle Client Configuration*.

FAN support is useful for planned and unplanned outages. It provides immediate notification to cx\_Oracle following outages related to the database, computers, and networks. Without FAN, cx\_Oracle can hang until a TCP timeout occurs and an error is returned, which might be several minutes.

FAN allows cx\_Oracle to provide high availability features without the application being aware of an outage. Unused, idle connections in a *connection pool* will be automatically cleaned up. A future `SessionPool.acquire()` call will establish a fresh connection to a surviving database instance without the application being aware of any service disruption.

To handle errors that affect active connections, you can add application logic to re-connect (this will connect to a surviving database instance) and replay application logic without having to return an error to the application user.

FAN benefits users of Oracle Database's clustering technology *Oracle RAC* because connections to surviving database instances can be immediately made. Users of Oracle's Data Guard with a broker will get FAN events generated when the standby database goes online. Standalone databases will send FAN events when the database restarts.

For a more information on FAN see the [white paper on Fast Application Notification](#).

## 1.17.4 Application Continuity (AC)

Oracle Application Continuity and Transparent Application Continuity are Oracle Database technologies that record application interaction with the database and, in the event of a database instance outage, attempt to replay the interaction on a surviving database instance. If successful, users will be unaware of any database issue.

When AC or TAC are configured on the database service, they are transparently available to cx\_Oracle applications.

You must thoroughly test your application because not all lower level calls in the the cx\_Oracle implementation can be replayed.

See [OCI and Application Continuity](#) for more information.

### 1.17.5 Transaction Guard

cx\_Oracle supports [Transaction Guard](#) which enables Python application to verify the success or failure of the last transaction in the event of an unplanned outage. This feature is available when both client and database are 12.1 or higher.

Using Transaction Guard helps to:

- Preserve the commit outcome
- Ensure a known outcome for every transaction

See [Oracle Database Development Guide](#) for more information about using Transaction Guard.

When an error occurs during commit, the Python application can acquire the logical transaction id (`ltxid`) from the connection and then call a procedure to determine the outcome of the commit for this logical transaction id.

Follow the steps below to use the Transaction Guard feature in Python:

1. Grant execute privileges to the database users who will be checking the outcome of the commit. Login as SYSDBA and run the following command:

```
GRANT EXECUTE ON DBMS_APP_CONT TO <username>;
```

2. Create a new service by executing the following PL/SQL block as SYSDBA. Replace the `<service-name>`, `<network-name>` and `<retention-value>` values with suitable values. It is important that the `COMMIT_OUTCOME` parameter be set to true for Transaction Guard to function properly.

```
DECLARE
    t_Params dbms_service.svc_parameter_array;
BEGIN
    t_Params('COMMIT_OUTCOME') := 'true';
    t_Params('RETENTION_TIMEOUT') := <retention-value>;
    DBMS_SERVICE.CREATE_SERVICE('<service-name>', '<network-name>', t_Params);
END;
/
```

3. Start the service by executing the following PL/SQL block as SYSDBA:

```
BEGIN
    DBMS_SERVICE.start_service('<service-name>');
END;
/
```

Ensure the service is running by examining the output of the following query:

```
SELECT name, network_name FROM V$ACTIVE_SERVICES ORDER BY 1;
```

#### Python Application code requirements to use Transaction Guard

In the Python application code:

- Use the connection attribute `ltxid` to determine the logical transaction id.

- Call the `DBMS_APP_CONT.GET_LTXID_OUTCOME` PL/SQL procedure with the logical transaction id acquired from the connection attribute. This returns a boolean value indicating if the last transaction was committed and whether the last call was completed successfully or not.

See the [Transaction Guard Sample](#) for further details.

## 1.18 Tracing SQL and PL/SQL Statements

### 1.18.1 Subclass Connections

Subclassing enables applications to add “hooks” for connection and statement execution. This can be used to alter, or log, connection and execution parameters, and to extend `cx_Oracle` functionality.

The example below demonstrates subclassing a connection to log SQL execution to a file. This example also shows how connection credentials can be embedded in the custom subclass, so application code does not need to supply them.

```
class Connection(cx_Oracle.Connection):
    logFileName = "log.txt"

    def __init__(self):
        connectString = "hr/hr_password@dbhost.example.com/orclpdb1"
        self._log("Connect to the database")
        return super(Connection, self).__init__(connectString)

    def _log(self, message):
        with open(self.logFileName, "a") as f:
            print(message, file=f)

    def execute(self, sql, parameters):
        self._log(sql)
        cursor = self.cursor()
        try:
            return cursor.execute(sql, parameters)
        except cx_Oracle.Error as e:
            errorObj, = e.args
            self._log(errorObj.message)

connection = Connection()
connection.execute("""
    select department_name
    from departments
    where department_id = :id""", dict(id=270))
```

The messages logged in `log.txt` are:

```
Connect to the database

    select department_name
    from departments
    where department_id = :id
```

If an error occurs, perhaps due to a missing table, the log file would contain instead:

```
Connect to the database
```

(continues on next page)



(continued from previous page)

```

        select department_name
        from departments
        where department_id = :id
ORA-00942: table or view does not exist

```

In production applications be careful not to log sensitive information.

See [Subclassing.py](#) for an example.

## 1.18.2 Oracle Database End-to-End Tracing

Oracle Database End-to-end application tracing simplifies diagnosing application code flow and performance problems in multi-tier or multi-user environments.

The connection attributes, *client\_identifier*, *clientinfo*, *dbop*, *module* and *action*, set the metadata for end-to-end tracing. You can use data dictionary and V\$ views to monitor tracing or use other application tracing utilities.

The attributes are sent to the database when the next round-trip to the database occurs, for example when the next SQL statement is executed.

The attribute values will remain set in connections released back to connection pools. When the application re-acquires a connection from the pool it should initialize the values to a desired state before using that connection.

The example below shows setting the action, module and client identifier attributes on the connection object:

```

# Set the tracing metadata
connection.client_identifier = "pythonuser"
connection.action = "Query Session tracing parameters"
connection.module = "End-to-end Demo"

for row in cursor.execute("""
    SELECT username, client_identifier, module, action
    FROM V$SESSION
    WHERE username = 'SYSTEM'"""):
    print(row)

```

The output will be:

```
('SYSTEM', 'pythonuser', 'End-to-end Demo', 'Query Session tracing parameters')
```

The values can also be manually set as shown by calling `DBMS_APPLICATION_INFO` procedures or `DBMS_SESSION.SET_IDENTIFIER`. These incur round-trips to the database, however, reducing scalability.

```

BEGIN
    DBMS_SESSION.SET_IDENTIFIER('pythonuser');
    DBMS_APPLICATION_INFO.set_module('End-to-End Demo');
    DBMS_APPLICATION_INFO.set_action(action_name => 'Query Session tracing parameters
    →');
END;

```

## 1.18.3 Low Level SQL Tracing in cx\_Oracle

cx\_Oracle is implemented using the `ODPI-C` wrapper on top of the Oracle Client libraries. The ODPI-C tracing capability can be used to log executed cx\_Oracle statements to the standard error stream. Before executing Python, set the environment variable `DPI_DEBUG_LEVEL` to 16.

At a Windows command prompt, this could be done with:

```
set DPI_DEBUG_LEVEL=16
```

On Linux, you might use:

```
export DPI_DEBUG_LEVEL=16
```

After setting the variable, run the Python Script, for example on Linux:

```
python end-to-endtracing.py 2> log.txt
```

For an application that does a single query, the log file might contain a tracing line consisting of the prefix ‘ODPI’, a thread identifier, a timestamp, and the SQL statement executed:

```
ODPI [26188] 2019-03-26 09:09:03.909: ODPI-C 3.1.1
ODPI [26188] 2019-03-26 09:09:03.909: debugging messages initialized at level 16
ODPI [26188] 2019-03-26 09:09:09.917: SQL SELECT * FROM jobss
Traceback (most recent call last):
File "end-to-endtracing.py", line 14, in <module>
    cursor.execute("select * from jobss")
cx_Oracle.DatabaseError: ORA-00942: table or view does not exist
```

See [ODPI-C Debugging](#) for documentation on DPI\_DEBUG\_LEVEL.

## 2.1 Module Interface

### `cx_Oracle.__future__`

Special object which contains attributes which control the behavior of `cx_Oracle`, allowing for opting in for new features. No attributes are currently supported so all attributes will silently ignore being set and will always appear to have the value `None`.

---

**Note:** This method is an extension to the DB API definition.

---

New in version 6.2.

### `cx_Oracle.Binary(string)`

Construct an object holding a binary (long) string value.

### `cx_Oracle.clientversion()`

Return the version of the client library being used as a 5-tuple. The five values are the major version, minor version, update number, patch number and port update number.

---

**Note:** This method is an extension to the DB API definition.

---

`cx_Oracle.connect` (*user=None, password=None, dsn=None, mode=*`cx_Oracle.DEFAULT_AUTH`, *handle=0, pool=None, threaded=False, events=False, cclass=None, purity=*`cx_Oracle.ATTR_PURITY_DEFAULT`, *newpassword=None, encoding=None, nencoding=None, edition=None, appcontext=[], tag=None, matchanytag=None, shardingkey=[], supershardingkey=[]*)

`cx_Oracle.Connection` (*user=None, password=None, dsn=None, mode=*`cx_Oracle.DEFAULT_AUTH`, *handle=0, pool=None, threaded=False, events=False, cclass=None, purity=*`cx_Oracle.ATTR_PURITY_DEFAULT`, *newpassword=None, encoding=None, nencoding=None, edition=None, appcontext=[], tag=None, matchanytag=False, shardingkey=[], supershardingkey=[]*)

Constructor for creating a connection to the database. Return a *connection object*. All parameters are optional

and can be specified as keyword parameters. See *Connecting to Oracle Database* information about connections.

The dsn (data source name) is the TNS entry (from the Oracle names server or tnsnames.ora file) or is a string like the one returned from `make_dsn()`. If the user parameter is passed and the password and dsn parameters are not passed, the user parameter is assumed to be a connect string in the format `user/password@dsn`, the same format accepted by Oracle applications such as SQL\*Plus. See *Connection Strings* for more information.

If the mode is specified, it must be one of the *connection authorization modes* which are defined at the module level.

If the handle is specified, it must be of type OCISvcCtx\* and is only of use when embedding Python in an application (like PowerBuilder) which has already made the connection.

The pool parameter is expected to be a *session pool object* and the use of this parameter is the equivalent of calling `SessionPool.acquire()`. Parameters not accepted by that method are ignored.

The threaded parameter is expected to be a boolean expression which indicates whether or not Oracle should wrap accesses to connections with a mutex. Doing so in single threaded applications imposes a performance penalty of about 10-15% which is why the default is False.

The events parameter is expected to be a boolean expression which indicates whether or not to initialize Oracle in events mode. This is required for continuous query notification and high availability event notifications.

The cclass parameter is expected to be a string and defines the connection class for database resident connection pooling (DRCP).

The purity parameter is expected to be one of `ATTR_PURITY_NEW`, `ATTR_PURITY_SELF`, or `ATTR_PURITY_DEFAULT`.

The newpassword parameter is expected to be a string if specified and sets the password for the logon during the connection process.

See the *globalization* section for details on the encoding and nencoding parameters.

The edition parameter is expected to be a string if specified and sets the edition to use for the session. It is only relevant if both the client and the database are at least Oracle Database 11.2. If this parameter is used with the cclass parameter the exception “DPI-1058: edition not supported with connection class” will be raised.

The appcontext parameter is expected to be a list of 3-tuples, if specified, and sets the application context for the connection. Application context is available in the database by using the `sys_context()` PL/SQL method and can be used within a logon trigger as well as any other PL/SQL procedures. Each entry in the list is expected to contain three strings: the namespace, the name and the value.

The tag parameter, if specified, is expected to be a string and will limit the sessions that can be returned from a session pool unless the `matchanytag` parameter is set to True. In that case sessions with the specified tag will be preferred over others, but if no such sessions are available a session with a different tag may be returned instead. In any case, untagged sessions will always be returned if no sessions with the specified tag are available. Sessions are tagged when they are *released* back to the pool.

The shardingkey and supershardingkey parameters, if specified, are expected to be a sequence of values which will be used to identify the database shard to connect to. The key values can be strings, numbers, bytes or dates.

`cx_Oracle.Cursor(connection)`

Constructor for creating a cursor. Return a new *cursor object* using the connection.

---

**Note:** This method is an extension to the DB API definition.

---

`cx_Oracle.Date(year, month, day)`

Construct an object holding a date value.

`cx_Oracle.DateFromTicks (ticks)`

Construct an object holding a date value from the given ticks value (number of seconds since the epoch; see the documentation of the standard Python time module for details).

`cx_Oracle.makedsn (host, port, sid=None, service_name=None, region=None, sharding_key=None, super_sharding_key=None)`

Return a string suitable for use as the dsn parameter for `connect()`. This string is identical to the strings that are defined by the Oracle names server or defined in the tnsnames.ora file.

---

**Note:** This method is an extension to the DB API definition.

---

`cx_Oracle.SessionPool (user=None, password=None, dsn=None, min=1, max=2, increment=1, connectiontype=cx_Oracle.Connection, threaded=False, getmode=cx_Oracle.SPOOL_ATTRVAL_NOWAIT, events=False, homogeneous=True, externalauth=False, encoding=None, nencoding=None, edition=None, timeout=0, waitTimeout=0, maxLifetimeSession=0, sessionCallback=None, maxSessionsPerShard=0)`

Create and return a *session pool object*. Connection pooling in cx\_Oracle is handled by Oracle's *Session pooling* technology. This allows cx\_Oracle applications to support features like *Application Continuity*.

See *Connection Pooling* for information on connection pooling.

Session pooling creates a pool of available connections to the database, allowing applications to acquire a connection very quickly. It is of primary use in a server where connections are requested in rapid succession and used for a short period of time, for example in a web server.

If the connection type is specified, all calls to `acquire()` will create connection objects of that type, rather than the base type defined at the module level.

The threaded parameter is expected to be a boolean expression which indicates whether Oracle should wrap accesses to connections with a mutex. Doing so in single threaded applications imposes a performance penalty of about 10-15% which is why the default is False.

The events parameter is expected to be a boolean expression which indicates whether or not to initialize Oracle in events mode. This is required for continuous query notification and high availability event notifications.

The homogeneous parameter is expected to be a boolean expression which indicates whether or not to create a homogeneous pool. A homogeneous pool requires that all connections in the pool use the same credentials. As such proxy authentication and external authentication is not possible with a homogeneous pool.

The externalauth parameter is expected to be a boolean expression which indicates whether or not external authentication should be used. External authentication implies that something other than the database is authenticating the user to the database. This includes the use of operating system authentication and Oracle wallets.

See the *globalization* section for details on the encoding and nencoding parameters.

The edition parameter is expected to be a string, if specified, and sets the edition to use for the sessions in the pool. It is only relevant if both the client and the server are at least Oracle Database 11.2.

The timeout parameter is expected to be an integer, if specified, and sets the length of time (in seconds) after which idle sessions in the pool are terminated. Note that termination only occurs when the pool is accessed. The default value of 0 means that no idle sessions are terminated.

The waitTimeout parameter is expected to be an integer, if specified, and sets the length of time (in milliseconds) that the caller should wait for a session to become available in the pool before returning with an error. This value is only used if the getmode parameter is set to the value `cx_Oracle.SPOOL_ATTRVAL_TIMEDWAIT`.

The maxLifetimeSession parameter is expected to be an integer, if specified, and sets the maximum length of time (in seconds) a pooled session may exist. Sessions that are in use will not be closed. They become candidates

for termination only when they are released back to the pool and have existed for longer than `maxLifetimeSession` seconds. Note that termination only occurs when the pool is accessed. The default value is 0 which means that there is no maximum length of time that a pooled session may exist.

The `sessionCallback` parameter is expected to be either a string or a callable. If the parameter is a string, this refers to a PL/SQL procedure that will be called when `SessionPool.acquire()` requests a tag and that tag does not match the connection's actual tag. Support for the PL/SQL procedure requires Oracle Client libraries 12.2 or later. See the [OCI documentation](#) for more information. If the `sessionCallback` parameter is a callable, however, it will be called when a newly created connection is returned from the pool or when a tag is requested and that tag does not match the connection's actual tag. The callable will be invoked with the connection and the requested tag as its only parameters.

The `maxSessionsPerShard` parameter is expected to be an integer, if specified, and sets the maximum number of sessions in the pool that can be used for any given shard in a sharded database. This value is ignored if the Oracle client library version is less than 18.3.

---

**Note:** This method is an extension to the DB API definition.

---

`cx_Oracle.Time` (*hour, minute, second*)  
Construct an object holding a time value.

---

**Note:** The time only data type is not supported by Oracle. Calling this function will raise a `NotSupportedError` exception.

---

`cx_Oracle.TimeFromTicks` (*ticks*)  
Construct an object holding a time value from the given ticks value (number of seconds since the epoch; see the documentation of the standard Python time module for details).

---

**Note:** The time only data type is not supported by Oracle. Calling this function will raise a `NotSupportedError` exception.

---

`cx_Oracle.Timestamp` (*year, month, day, hour, minute, second*)  
Construct an object holding a time stamp value.

`cx_Oracle.TimestampFromTicks` (*ticks*)  
Construct an object holding a time stamp value from the given ticks value (number of seconds since the epoch; see the documentation of the standard Python time module for details).

## 2.1.1 Constants

### General

`cx_Oracle.apilevel`  
String constant stating the supported DB API level. Currently '2.0'.

`cx_Oracle.buildtime`  
String constant stating the time when the binary was built.

---

**Note:** This constant is an extension to the DB API definition.

---

#### `cx_Oracle.paramstyle`

String constant stating the type of parameter marker formatting expected by the interface. Currently 'named' as in 'where name = :name'.

#### `cx_Oracle.threadsafety`

Integer constant stating the level of thread safety that the interface supports. Currently 2, which means that threads may share the module and connections, but not cursors. Sharing means that a thread may use a resource without wrapping it using a mutex semaphore to implement resource locking.

Note that in order to make use of multiple threads in a program which intends to connect and disconnect in different threads, the threaded parameter to `connect()` or `SessionPool()` must be true.

#### `cx_Oracle.version`

#### `cx_Oracle.__version__`

String constant stating the version of the module. Currently '7.3.0'.

---

**Note:** This attribute is an extension to the DB API definition.

---

## Advanced Queuing: Delivery Modes

These constants are extensions to the DB API definition. They are possible values for the *deliverymode* attribute of the *dequeue options object* passed as the options parameter to the `Connection.deq()` method as well as the *deliverymode* attribute of the *enqueue options object* passed as the options parameter to the `Connection.enq()` method. They are also possible values for the *deliverymode* attribute of the *message properties object* passed as the msgproperties parameter to the `Connection.deq()` and `Connection.enq()` methods.

#### `cx_Oracle.MSG_BUFFERED`

This constant is used to specify that enqueue/dequeue operations should enqueue or dequeue buffered messages.

#### `cx_Oracle.MSG_PERSISTENT`

This constant is used to specify that enqueue/dequeue operations should enqueue or dequeue persistent messages. This is the default value.

#### `cx_Oracle.MSG_PERSISTENT_OR_BUFFERED`

This constant is used to specify that dequeue operations should dequeue either persistent or buffered messages.

## Advanced Queuing: Dequeue Modes

These constants are extensions to the DB API definition. They are possible values for the *mode* attribute of the *dequeue options object*. This object is the options parameter for the `Connection.deq()` method.

#### `cx_Oracle.DEQ_BROWSE`

This constant is used to specify that dequeue should read the message without acquiring any lock on the message (equivalent to a select statement).

#### `cx_Oracle.DEQ_LOCKED`

This constant is used to specify that dequeue should read and obtain a write lock on the message for the duration of the transaction (equivalent to a select for update statement).

#### `cx_Oracle.DEQ_REMOVE`

This constant is used to specify that dequeue should read the message and update or delete it. This is the default value.

#### `cx_Oracle.DEQ_REMOVE_NODATA`

This constant is used to specify that dequeue should confirm receipt of the message but not deliver the actual message content.

### Advanced Queuing: Dequeue Navigation Modes

These constants are extensions to the DB API definition. They are possible values for the *navigation* attribute of the *dequeue options object*. This object is the options parameter for the *Connection.deq()* method.

**cx\_Oracle.DEQ\_FIRST\_MSG**

This constant is used to specify that dequeue should retrieve the first available message that matches the search criteria. This resets the position to the beginning of the queue.

**cx\_Oracle.DEQ\_NEXT\_MSG**

This constant is used to specify that dequeue should retrieve the next available message that matches the search criteria. If the previous message belongs to a message group, AQ retrieves the next available message that matches the search criteria and belongs to the message group. This is the default.

**cx\_Oracle.DEQ\_NEXT\_TRANSACTION**

This constant is used to specify that dequeue should skip the remainder of the transaction group and retrieve the first message of the next transaction group. This option can only be used if message grouping is enabled for the current queue.

### Advanced Queuing: Dequeue Visibility Modes

These constants are extensions to the DB API definition. They are possible values for the *visibility* attribute of the *dequeue options object*. This object is the options parameter for the *Connection.deq()* method.

**cx\_Oracle.DEQ\_IMMEDIATE**

This constant is used to specify that dequeue should perform its work as part of an independent transaction.

**cx\_Oracle.DEQ\_ON\_COMMIT**

This constant is used to specify that dequeue should be part of the current transaction. This is the default value.

### Advanced Queuing: Dequeue Wait Modes

These constants are extensions to the DB API definition. They are possible values for the *wait* attribute of the *dequeue options object*. This object is the options parameter for the *Connection.deq()* method.

**cx\_Oracle.DEQ\_NO\_WAIT**

This constant is used to specify that dequeue not wait for messages to be available for dequeuing.

**cx\_Oracle.DEQ\_WAIT\_FOREVER**

This constant is used to specify that dequeue should wait forever for messages to be available for dequeuing. This is the default value.

### Advanced Queuing: Enqueue Visibility Modes

These constants are extensions to the DB API definition. They are possible values for the *visibility* attribute of the *enqueue options object*. This object is the options parameter for the *Connection.enq()* method.

**cx\_Oracle.ENQ\_IMMEDIATE**

This constant is used to specify that enqueue should perform its work as part of an independent transaction.

**cx\_Oracle.ENQ\_ON\_COMMIT**

This constant is used to specify that enqueue should be part of the current transaction. This is the default value.



## Advanced Queuing: Message States

These constants are extensions to the DB API definition. They are possible values for the *state* attribute of the *message properties object*. This object is the *msgproperties* parameter for the *Connection.deq()* and *Connection.enq()* methods.

`cx_Oracle.MSG_EXPIRED`

This constant is used to specify that the message has been moved to the exception queue.

`cx_Oracle.MSG_PROCESSED`

This constant is used to specify that the message has been processed and has been retained.

`cx_Oracle.MSG_READY`

This constant is used to specify that the message is ready to be processed.

`cx_Oracle.MSG_WAITING`

This constant is used to specify that the message delay has not yet been reached.

## Advanced Queuing: Other

These constants are extensions to the DB API definition. They are special constants used in advanced queuing.

`cx_Oracle.MSG_NO_DELAY`

This constant is a possible value for the *delay* attribute of the *message properties object* passed as the *msgproperties* parameter to the *Connection.deq()* and *Connection.enq()* methods. It specifies that no delay should be imposed and the message should be immediately available for dequeuing. This is also the default value.

`cx_Oracle.MSG_NO_EXPIRATION`

This constant is a possible value for the *expiration* attribute of the *message properties object* passed as the *msgproperties* parameter to the *Connection.deq()* and *Connection.enq()* methods. It specifies that the message never expires. This is also the default value.

## Connection Authorization Modes

These constants are extensions to the DB API definition. They are possible values for the *mode* parameter of the *connect()* method.

`cx_Oracle.DEFAULT_AUTH`

This constant is used to specify that default authentication is to take place. This is the default value if no mode is passed at all.

New in version 7.2.

`cx_Oracle.PRELIM_AUTH`

This constant is used to specify that preliminary authentication is to be used. This is needed for performing database startup and shutdown.

`cx_Oracle.SYSASM`

This constant is used to specify that SYSASM access is to be acquired.

`cx_Oracle.SYSBKP`

This constant is used to specify that SYSBACKUP access is to be acquired.

`cx_Oracle.SYSDBA`

This constant is used to specify that SYSDBA access is to be acquired.

`cx_Oracle.SYSDG`

This constant is used to specify that SYSDG access is to be acquired.

**cx\_Oracle.SYSKMT**

This constant is used to specify that SYSKM access is to be acquired.

**cx\_Oracle.SYSOPER**

This constant is used to specify that SYSOPER access is to be acquired.

**cx\_Oracle.SYSRAC**

This constant is used to specify that SYSRAC access is to be acquired.

## Database Shutdown Modes

These constants are extensions to the DB API definition. They are possible values for the mode parameter of the *Connection.shutdown()* method.

**cx\_Oracle.DBSHUTDOWN\_ABORT**

This constant is used to specify that the caller should not wait for current processing to complete or for users to disconnect from the database. This should only be used in unusual circumstances since database recovery may be necessary upon next startup.

**cx\_Oracle.DBSHUTDOWN\_FINAL**

This constant is used to specify that the instance can be truly halted. This should only be done after the database has been shutdown with one of the other modes (except abort) and the database has been closed and dismounted using the appropriate SQL commands.

**cx\_Oracle.DBSHUTDOWN\_IMMEDIATE**

This constant is used to specify that all uncommitted transactions should be rolled back and any connected users should be disconnected.

**cx\_Oracle.DBSHUTDOWN\_TRANSACTIONAL**

This constant is used to specify that further connections to the database should be prohibited and no new transactions should be allowed. It then waits for all active transactions to complete.

**cx\_Oracle.DBSHUTDOWN\_TRANSACTIONAL\_LOCAL**

This constant is used to specify that further connections to the database should be prohibited and no new transactions should be allowed. It then waits for only local active transactions to complete.

## Event Types

These constants are extensions to the DB API definition. They are possible values for the *Message.type* attribute of the messages that are sent for subscriptions created by the *Connection.subscribe()* method.

**cx\_Oracle.EVENT\_AQ**

This constant is used to specify that one or more messages are available for dequeuing on the queue specified when the subscription was created.

**cx\_Oracle.EVENT\_DEREG**

This constant is used to specify that the subscription has been deregistered and no further notifications will be sent.

**cx\_Oracle.EVENT\_NONE**

This constant is used to specify no information is available about the event.

**cx\_Oracle.EVENT\_OBJCHANGE**

This constant is used to specify that a database change has taken place on a table registered with the *Subscription.registerquery()* method.

**cx\_Oracle.EVENT\_QUERYCHANGE**

This constant is used to specify that the result set of a query registered with the *Subscription.registerquery()* method has been changed.

**cx\_Oracle.EVENT\_SHUTDOWN**

This constant is used to specify that the instance is in the process of being shut down.

**cx\_Oracle.EVENT\_SHUTDOWN\_ANY**

This constant is used to specify that any instance (when running RAC) is in the process of being shut down.

**cx\_Oracle.EVENT\_STARTUP**

This constant is used to specify that the instance is in the process of being started up.

## Operation Codes

These constants are extensions to the DB API definition. They are possible values for the operations parameter for the *Connection.subscribe()* method. One or more of these values can be OR'ed together. These values are also used by the *MessageTable.operation* or *MessageQuery.operation* attributes of the messages that are sent.

**cx\_Oracle.OPCODE\_ALLOPS**

This constant is used to specify that messages should be sent for all operations.

**cx\_Oracle.OPCODE\_ALLROWS**

This constant is used to specify that the table or query has been completely invalidated.

**cx\_Oracle.OPCODE\_ALTER**

This constant is used to specify that messages should be sent when a registered table has been altered in some fashion by DDL, or that the message identifies a table that has been altered.

**cx\_Oracle.OPCODE\_DELETE**

This constant is used to specify that messages should be sent when data is deleted, or that the message identifies a row that has been deleted.

**cx\_Oracle.OPCODE\_DROP**

This constant is used to specify that messages should be sent when a registered table has been dropped, or that the message identifies a table that has been dropped.

**cx\_Oracle.OPCODE\_INSERT**

This constant is used to specify that messages should be sent when data is inserted, or that the message identifies a row that has been inserted.

**cx\_Oracle.OPCODE\_UPDATE**

This constant is used to specify that messages should be sent when data is updated, or that the message identifies a row that has been updated.

## Session Pool Get Modes

These constants are extensions to the DB API definition. They are possible values for the getmode parameter of the *SessionPool()* method.

**cx\_Oracle.SPOOL\_ATTRVAL\_FORCEGET**

This constant is used to specify that a new connection will be returned if there are no free sessions available in the pool.

**cx\_Oracle.SPOOL\_ATTRVAL\_NOWAIT**

This constant is used to specify that an exception should be raised if there are no free sessions available in the pool. This is the default value.

**cx\_Oracle.SPOOL\_ATTRVAL\_WAIT**

This constant is used to specify that the caller should wait until a session is available if there are no free sessions available in the pool.

#### `cx_Oracle.SPOOL_ATTRVAL_TIMEDWAIT`

This constant is used to specify that the caller should wait for a period of time (defined by the `waitTimeout` parameter) for a session to become available before returning with an error.

### Session Pool Purity

These constants are extensions to the DB API definition. They are possible values for the `purity` parameter of the `connect()` method, which is used in database resident connection pooling (DRCP).

#### `cx_Oracle.ATTR_PURITY_DEFAULT`

This constant is used to specify that the purity of the session is the default value identified by Oracle (see Oracle's documentation for more information). This is the default value.

#### `cx_Oracle.ATTR_PURITY_NEW`

This constant is used to specify that the session acquired from the pool should be new and not have any prior session state.

#### `cx_Oracle.ATTR_PURITY_SELF`

This constant is used to specify that the session acquired from the pool need not be new and may have prior session state.

### Subscription Grouping Classes

These constants are extensions to the DB API definition. They are possible values for the `groupingClass` parameter of the `Connection.subscribe()` method.

#### `cx_Oracle.SUBSCR_GROUPING_CLASS_TIME`

This constant is used to specify that events are to be grouped by the period of time in which they are received.

### Subscription Grouping Types

These constants are extensions to the DB API definition. They are possible values for the `groupingType` parameter of the `Connection.subscribe()` method.

#### `cx_Oracle.SUBSCR_GROUPING_TYPE_SUMMARY`

This constant is used to specify that when events are grouped a summary of the events should be sent instead of the individual events. This is the default value.

#### `cx_Oracle.SUBSCR_GROUPING_TYPE_LAST`

This constant is used to specify that when events are grouped the last event that makes up the group should be sent instead of the individual events.

### Subscription Namespaces

These constants are extensions to the DB API definition. They are possible values for the `namespace` parameter of the `Connection.subscribe()` method.

#### `cx_Oracle.SUBSCR_NAMESPACE_AQ`

This constant is used to specify that notifications should be sent when a queue has messages available to dequeue.

#### `cx_Oracle.SUBSCR_NAMESPACE_DBCHANGE`

This constant is used to specify that database change notification or query change notification messages are to be sent. This is the default value.

## Subscription Protocols

These constants are extensions to the DB API definition. They are possible values for the protocol parameter of the *Connection.subscribe()* method.

`cx_Oracle.SUBSCR_PROTO_HTTP`

This constant is used to specify that notifications will be sent to an HTTP URL when a message is generated. This value is currently not supported.

`cx_Oracle.SUBSCR_PROTO_MAIL`

This constant is used to specify that notifications will be sent to an e-mail address when a message is generated. This value is currently not supported.

`cx_Oracle.SUBSCR_PROTO_OCI`

This constant is used to specify that notifications will be sent to the callback routine identified when the subscription was created. It is the default value and the only value currently supported.

`cx_Oracle.SUBSCR_PROTO_SERVER`

This constant is used to specify that notifications will be sent to a PL/SQL procedure when a message is generated. This value is currently not supported.

## Subscription Quality of Service

These constants are extensions to the DB API definition. They are possible values for the qos parameter of the *Connection.subscribe()* method. One or more of these values can be OR'ed together.

`cx_Oracle.SUBSCR_QOS_BEST_EFFORT`

This constant is used to specify that best effort filtering for query result set changes is acceptable. False positive notifications may be received. This behaviour may be suitable for caching applications.

`cx_Oracle.SUBSCR_QOS_DEREG_NFY`

This constant is used to specify that the subscription should be automatically unregistered after the first notification is received.

`cx_Oracle.SUBSCR_QOS_QUERY`

This constant is used to specify that notifications should be sent if the result set of the registered query changes. By default no false positive notifications will be generated.

`cx_Oracle.SUBSCR_QOS_RELIABLE`

This constant is used to specify that notifications should not be lost in the event of database failure.

`cx_Oracle.SUBSCR_QOS_ROWIDS`

This constant is used to specify that the rowids of the inserted, updated or deleted rows should be included in the message objects that are sent.

### 2.1.2 Types

`cx_Oracle.BINARY`

This type object is used to describe columns in a database that contain binary data. In Oracle this is RAW columns.

`cx_Oracle.BFILE`

This type object is used to describe columns in a database that are BFILEs.

---

**Note:** This type is an extension to the DB API definition.

---

**cx\_Oracle.BLOB**

This type object is used to describe columns in a database that are BLOBs.

---

**Note:** This type is an extension to the DB API definition.

---

**cx\_Oracle.BOOLEAN**

This type object is used to represent PL/SQL booleans.

New in version 5.2.1.

---

**Note:** This type is an extension to the DB API definition. It is only available in Oracle 12.1 and higher and only within PL/SQL. It cannot be used in columns.

---

**cx\_Oracle.CLOB**

This type object is used to describe columns in a database that are CLOBs.

---

**Note:** This type is an extension to the DB API definition.

---

**cx\_Oracle.CURSOR**

This type object is used to describe columns in a database that are cursors (in PL/SQL these are known as ref cursors).

---

**Note:** This type is an extension to the DB API definition.

---

**cx\_Oracle.DATETIME**

This type object is used to describe columns in a database that are dates.

**cx\_Oracle.FIXED\_CHAR**

This type object is used to describe columns in a database that are fixed length strings (in Oracle these are CHAR columns); these behave differently in Oracle than varchar2 so they are differentiated here even though the DB API does not differentiate them.

---

**Note:** This attribute is an extension to the DB API definition.

---

**cx\_Oracle.FIXED\_NCHAR**

This type object is used to describe columns in a database that are NCHAR columns in Oracle; these behave differently in Oracle than nvarchar2 so they are differentiated here even though the DB API does not differentiate them.

---

**Note:** This type is an extension to the DB API definition.

---

**cx\_Oracle.INTERVAL**

This type object is used to describe columns in a database that are of type interval day to second.

---

**Note:** This type is an extension to the DB API definition.

---

**cx\_Oracle.LOB**

This type object is the Python type of *BLOB* and *CLOB* data that is returned from cursors.

---

**Note:** This type is an extension to the DB API definition.

---

`cx_Oracle.LONG_BINARY`

This type object is used to describe columns in a database that are long binary (in Oracle these are LONG RAW columns).

---

**Note:** This type is an extension to the DB API definition.

---

`cx_Oracle.LONG_STRING`

This type object is used to describe columns in a database that are long strings (in Oracle these are LONG columns).

---

**Note:** This type is an extension to the DB API definition.

---

`cx_Oracle.NATIVE_FLOAT`

This type object is used to describe columns in a database that are of type `binary_double` or `binary_float`.

---

**Note:** This type is an extension to the DB API definition.

---

`cx_Oracle.NATIVE_INT`

This type object is used to bind integers using Oracle's native integer support, rather than the standard number support.

New in version 5.3.

---

**Note:** This type is an extension to the DB API definition.

---

`cx_Oracle.NCHAR`

This type object is used to describe national character strings (NVARCHAR2) in Oracle.

---

**Note:** This type is an extension to the DB API definition.

---

`cx_Oracle.NCLOB`

This type object is used to describe columns in a database that are NCLOBs.

---

**Note:** This type is an extension to the DB API definition.

---

`cx_Oracle.NUMBER`

This type object is used to describe columns in a database that are numbers.

`cx_Oracle.OBJECT`

This type object is used to describe columns in a database that are objects.

---

**Note:** This type is an extension to the DB API definition.

---

**cx\_Oracle.ROWID**

This type object is used to describe the pseudo column “rowid”.

**cx\_Oracle.STRING**

This type object is used to describe columns in a database that are strings (in Oracle this is VARCHAR2 columns).

**cx\_Oracle.TIMESTAMP**

This type object is used to describe columns in a database that are timestamps.

---

**Note:** This attribute is an extension to the DB API definition.

---

## 2.1.3 Exceptions

**exception cx\_Oracle.Warning**

Exception raised for important warnings and defined by the DB API but not actually used by cx\_Oracle.

**exception cx\_Oracle.Error**

Exception that is the base class of all other exceptions defined by cx\_Oracle and is a subclass of the Python StandardError exception (defined in the module exceptions).

**exception cx\_Oracle.InterfaceError**

Exception raised for errors that are related to the database interface rather than the database itself. It is a subclass of Error.

**exception cx\_Oracle.DatabaseError**

Exception raised for errors that are related to the database. It is a subclass of Error.

**exception cx\_Oracle.DataError**

Exception raised for errors that are due to problems with the processed data. It is a subclass of DatabaseError.

**exception cx\_Oracle.OperationalError**

Exception raised for errors that are related to the operation of the database but are not necessarily under the control of the programmer. It is a subclass of DatabaseError.

**exception cx\_Oracle.IntegrityError**

Exception raised when the relational integrity of the database is affected. It is a subclass of DatabaseError.

**exception cx\_Oracle.InternalError**

Exception raised when the database encounters an internal error. It is a subclass of DatabaseError.

**exception cx\_Oracle.ProgrammingError**

Exception raised for programming errors. It is a subclass of DatabaseError.

**exception cx\_Oracle.NotSupportedError**

Exception raised when a method or database API was used which is not supported by the database. It is a subclass of DatabaseError.

## 2.1.4 Exception handling

---

**Note:** PEP 249 (Python Database API Specification v2.0) says the following about exception values:

[...] The values of these exceptions are not defined. They should give the user a fairly good idea of what went wrong, though. [...]



With cx\_Oracle every exception object has exactly one argument in the `args` tuple. This argument is a `cx_Oracle._Error` object which has the following five read-only attributes.

---

**`_Error.code`**

Integer attribute representing the Oracle error number (ORA-XXXXX).

**`_Error.offset`**

Integer attribute representing the error offset when applicable.

**`_Error.message`**

String attribute representing the Oracle message of the error. This message is localized by the environment of the Oracle connection.

**`_Error.context`**

String attribute representing the context in which the exception was raised.

**`_Error.isrecoverable`**

Boolean attribute representing whether the error is recoverable or not. This is `False` in all cases unless Oracle Database 12.1 is being used on both the server and the client.

New in version 5.3.

This allows you to use the exceptions for example in the following way:

```
from __future__ import print_function

import cx_Oracle

connection = cx_Oracle.connect("cx_Oracle/dev@localhost/orclpdb1")
cursor = connection.cursor()

try:
    cursor.execute("select 1 / 0 from dual")
except cx_Oracle.DatabaseError as exc:
    error, = exc.args
    print("Oracle-Error-Code:", error.code)
    print("Oracle-Error-Message:", error.message)
```

## 2.2 Connection Object

---

**Note:** Any outstanding changes will be rolled back when the connection object is destroyed or closed.

---

**`Connection.__enter__()`**

The entry point for the connection as a context manager. It returns itself.

---

**Note:** This method is an extension to the DB API definition.

---

**`Connection.__exit__()`**

The exit point for the connection as a context manager. This will close the connection and roll back any uncommitted transaction.

---

**Note:** This method is an extension to the DB API definition.

---

#### Connection.action

This write-only attribute sets the action column in the v\$session table. It is a string attribute and cannot be set to None – use the empty string instead.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### Connection.autocommit

This read-write attribute determines whether autocommit mode is on or off. When autocommit mode is on, all statements are committed as soon as they have completed executing.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### Connection.begin ([formatId, transactionId, branchId])

Explicitly begin a new transaction. Without parameters, this explicitly begins a local transaction; otherwise, this explicitly begins a distributed (global) transaction with the given parameters. See the Oracle documentation for more details.

Note that in order to make use of global (distributed) transactions, the *internal\_name* and *external\_name* attributes must be set.

---

**Note:** This method is an extension to the DB API definition.

---

#### Connection.callTimeout

This read-write attribute specifies the amount of time (in milliseconds) that a single round-trip to the database may take before a timeout will occur. A value of 0 means that no timeout will take place.

New in version 7.0.

---

**Note:** This attribute is an extension to the DB API definition and is only available in Oracle Client 18c and higher.

---

#### Connection.cancel ()

Cancel a long-running transaction.

---

**Note:** This method is an extension to the DB API definition.

---

#### Connection.changepassword (oldpassword, newpassword)

Change the password of the login.

---

**Note:** This method is an extension to the DB API definition.

---

#### Connection.client\_identifier

This write-only attribute sets the client\_identifier column in the v\$session table.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### Connection.clientinfo

This write-only attribute sets the client\_info column in the v\$session table.

---

**Note:** This attribute is an extension to the DB API definition.

---

`Connection.close()`

Close the connection now, rather than whenever `__del__` is called. The connection will be unusable from this point forward; an Error exception will be raised if any operation is attempted with the connection.

All open cursors and LOBs created by the connection will be closed and will also no longer be usable.

Internally, references to the connection are held by cursor objects, LOB objects, subscription objects, etc. Once all of these references are released, the connection itself will be closed automatically. Either control references to these related objects carefully or explicitly close connections in order to ensure sufficient resources are available.

`Connection.commit()`

Commit any pending transactions to the database.

`Connection.createlob(lobType)`

Create and return a new temporary *LOB object* of the specified type. The `lobType` parameter should be one of `cx_Oracle.CLOB`, `cx_Oracle.BLOB` or `cx_Oracle.NCLOB`.

New in version 6.2.

---

**Note:** This method is an extension to the DB API definition.

---

`Connection.current_schema`

This read-write attribute sets the current schema attribute for the session. Setting this value is the same as executing the SQL statement “ALTER SESSION SET CURRENT\_SCHEMA”. The attribute is set (and verified) on the next call that does a round trip to the server. The value is placed before unqualified database objects in SQL statements you then execute.

---

**Note:** This attribute is an extension to the DB API definition.

---

`Connection.cursor()`

Return a new *cursor object* using the connection.

`Connection.dbop`

This write-only attribute sets the database operation that is to be monitored. This can be viewed in the `DBOP_NAME` column of the `V$SQL_MONITOR` table.

---

**Note:** This attribute is an extension to the DB API definition.

---

`Connection.deq(name, options, msgproperties, payload)`

Returns a message id after successfully dequeuing a message. The options object can be created using `deqoptions()` and the msgproperties object can be created using `msgproperties()`. The payload must be an object created using `ObjectType.newobject()`.

New in version 5.3.

Deprecated since version 7.2: Use the methods `Queue.deqOne()` or `Queue.deqMany()` instead.

---

**Note:** This method is an extension to the DB API definition.

---

#### Connection.dequeueOptions()

Returns an object specifying the options to use when dequeuing messages. See *Dequeue Options* for more information.

New in version 5.3.

Deprecated since version 7.2: Use the attribute *Queue.deqOptions* instead.

---

**Note:** This method is an extension to the DB API definition.

---

#### Connection.dsn

This read-only attribute returns the TNS entry of the database to which a connection has been established.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### Connection.edition

This read-only attribute gets the session edition and is only available in Oracle Database 11.2 (both client and server must be at this level or higher for this to work).

New in version 5.3.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### Connection.encoding

This read-only attribute returns the IANA character set name of the character set in use by the Oracle client for regular strings.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### Connection.enq(name, options, msgproperties, payload)

Returns a message id after successfully enqueueing a message. The options object can be created using *enqueueOptions()* and the msgproperties object can be created using *msgproperties()*. The payload must be an object created using *ObjectType.newobject()*.

New in version 5.3.

Deprecated since version 7.2: Use the methods *Queue.enqOne()* or *Queue.enqMany()* instead.

---

**Note:** This method is an extension to the DB API definition.

---

#### Connection.enqueueOptions()

Returns an object specifying the options to use when enqueueing messages. See *Enqueue Options* for more information.

New in version 5.3.

Deprecated since version 7.2: Use the attribute *Queue.enqOptions* instead.

---

**Note:** This method is an extension to the DB API definition.

---

---

### Connection.**external\_name**

This read-write attribute specifies the external name that is used by the connection when logging distributed transactions.

New in version 5.3.

---

**Note:** This attribute is an extension to the DB API definition.

---

### Connection.**getSodaDatabase** ()

Return a [SodaDatabase](#) object for Simple Oracle Document Access (SODA). All SODA operations are performed either on the returned SodaDatabase object or from objects created by the returned SodaDatabase object. See [here](#) for additional information on SODA.

New in version 7.0.

---

**Note:** This method is an extension to the DB API definition.

---

### Connection.**gettype** (name)

Return a [type object](#) given its name. This can then be used to create objects which can be bound to cursors created by this connection.

New in version 5.3.

---

**Note:** This method is an extension to the DB API definition.

---

### Connection.**handle**

This read-only attribute returns the OCI service context handle for the connection. It is primarily provided to facilitate testing the creation of a connection using the OCI service context handle.

---

**Note:** This attribute is an extension to the DB API definition.

---

### Connection.**inputtypehandler**

This read-write attribute specifies a method called for each value that is bound to a statement executed on any cursor associated with this connection. The method signature is handler(cursor, value, arraysize) and the return value is expected to be a variable object or None in which case a default variable object will be created. If this attribute is None, the default behavior will take place for all values bound to statements.

---

**Note:** This attribute is an extension to the DB API definition.

---

### Connection.**internal\_name**

This read-write attribute specifies the internal name that is used by the connection when logging distributed transactions.

New in version 5.3.

---

**Note:** This attribute is an extension to the DB API definition.

---

### Connection.**ltxid**

This read-only attribute returns the logical transaction id for the connection. It is used within Oracle Transaction

Guard as a means of ensuring that transactions are not duplicated. See the Oracle documentation and the provided sample for more information.

New in version 5.3.

#### **Connection.maxBytesPerCharacter**

This read-only attribute returns the maximum number of bytes each character can use for the client character set.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### **Connection.module**

This write-only attribute sets the module column in the v\$session table. The maximum length for this string is 48 and if you exceed this length you will get ORA-24960.

#### **Connection.msgproperties** (*payload, correlation, delay, exceptionq, expiration, priority*)

Returns an object specifying the properties of messages used in advanced queuing. See [Message Properties](#) for more information.

Each of the parameters are optional. If specified, they act as a shortcut for setting each of the equivalently named properties.

New in version 5.3.

Changed in version 7.2: Added parameters

---

**Note:** This method is an extension to the DB API definition.

---

#### **Connection.nencoding**

This read-only attribute returns the IANA character set name of the national character set in use by the Oracle client.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### **Connection.outputtypehandler**

This read-write attribute specifies a method called for each column that is going to be fetched from any cursor associated with this connection. The method signature is handler(cursor, name, defaultType, length, precision, scale) and the return value is expected to be a variable object or None in which case a default variable object will be created. If this attribute is None, the default behavior will take place for all columns fetched from cursors.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### **Connection.ping()**

Ping the server which can be used to test if the connection is still active.

---

**Note:** This method is an extension to the DB API definition.

---

#### **Connection.prepare()**

Prepare the distributed (global) transaction for commit. Return a boolean indicating if a transaction was actually prepared in order to avoid the error ORA-24756 (transaction does not exist).

---

**Note:** This method is an extension to the DB API definition.

---

`Connection.queue` (*name*, *payloadType=None*)

Creates a *queue* which is used to enqueue and dequeue messages in Advanced Queueing.

The *name* parameter is expected to be a string identifying the queue in which messages are to be enqueued or dequeued.

The *payloadType* parameter, if specified, is expected to be an *object type* that identifies the type of payload the queue expects. If not specified, RAW data is enqueued and dequeued.

New in version 7.2.

---

**Note:** This method is an extension to the DB API definition.

---

`Connection.rollback` ()

Rollback any pending transactions.

`Connection.shutdown` ([*mode*])

Shutdown the database. In order to do this the connection must be connected as *SYSDBA* or *SYSOPER*. Two calls must be made unless the mode specified is *DBSHUTDOWN\_ABORT*. An example is shown below:

```
import cx_Oracle

connection = cx_Oracle.connect(mode = cx_Oracle.SYSDBA)
connection.shutdown(mode = cx_Oracle.DBSHUTDOWN_IMMEDIATE)
cursor = connection.cursor()
cursor.execute("alter database close normal")
cursor.execute("alter database dismount")
connection.shutdown(mode = cx_Oracle.DBSHUTDOWN_FINAL)
```

---

**Note:** This method is an extension to the DB API definition.

---

`Connection.startup` (*force=False*, *restrict=False*)

Startup the database. This is equivalent to the SQL\*Plus command “startup nomount”. The connection must be connected as *SYSDBA* or *SYSOPER* with the *PRELIM\_AUTH* option specified for this to work. An example is shown below:

```
import cx_Oracle

connection = cx_Oracle.connect(
    mode=cx_Oracle.SYSDBA | cx_Oracle.PRELIM_AUTH)
connection.startup()
connection = cx_Oracle.connect(mode=cx_Oracle.SYSDBA)
cursor = connection.cursor()
cursor.execute("alter database mount")
cursor.execute("alter database open")
```

---

**Note:** This method is an extension to the DB API definition.

---

`Connection.stmtcachesize`

This read-write attribute specifies the size of the statement cache. This value can make a significant difference

in performance (up to 100x) if you have a small number of statements that you execute repeatedly.

---

**Note:** This attribute is an extension to the DB API definition.

---

```
Connection.subscribe(namespace=cx_Oracle.SUBSCR_NAMESPACE_DBCHANGE,      pro-
                    tocol=cx_Oracle.SUBSCR_PROTO_OCI,      callback=None,      time-
                    out=0,      operations=OPCODE_ALLOPS,      port=0,      qos=0,      ipAd-
                    dress=None,      groupingClass=0,      groupingValue=0,      grouping-
                    Type=cx_Oracle.SUBSCR_GROUPING_TYPE_SUMMARY,      name=None,
                    clientInitiated=False)
```

Return a new *subscription object* that receives notifications for events that take place in the database that match the given parameters.

The namespace parameter specifies the namespace the subscription uses. It can be one of `cx_Oracle.SUBSCR_NAMESPACE_DBCHANGE` or `cx_Oracle.SUBSCR_NAMESPACE_AQ`.

The protocol parameter specifies the protocol to use when notifications are sent. Currently the only valid value is `cx_Oracle.SUBSCR_PROTO_OCI`.

The callback is expected to be a callable that accepts a single parameter. A *message object* is passed to this callback whenever a notification is received.

The timeout value specifies that the subscription expires after the given time in seconds. The default value of 0 indicates that the subscription never expires.

The operations parameter enables filtering of the messages that are sent (insert, update, delete). The default value will send notifications for all operations. This parameter is only used when the namespace is set to `cx_Oracle.SUBSCR_NAMESPACE_DBCHANGE`.

The port parameter specifies the listening port for callback notifications from the database server. If not specified, an unused port will be selected by the Oracle Client libraries.

The qos parameter specifies quality of service options. It should be one or more of the following flags, OR'ed together: `cx_Oracle.SUBSCR_QOS_RELIABLE`, `cx_Oracle.SUBSCR_QOS_DEREG_NFY`, `cx_Oracle.SUBSCR_QOS_ROWIDS`, `cx_Oracle.SUBSCR_QOS_QUERY`, `cx_Oracle.SUBSCR_QOS_BEST_EFFORT`.

The ipAddress parameter specifies the IP address (IPv4 or IPv6) in standard string notation to bind for callback notifications from the database server. If not specified, the client IP address will be determined by the Oracle Client libraries.

The groupingClass parameter specifies what type of grouping of notifications should take place. Currently, if set, this value can only be set to the value `cx_Oracle.SUBSCR_GROUPING_CLASS_TIME`, which will group notifications by the number of seconds specified in the groupingValue parameter. The groupingType parameter should be one of the values `cx_Oracle.SUBSCR_GROUPING_TYPE_SUMMARY` (the default) or `cx_Oracle.SUBSCR_GROUPING_TYPE_LAST`.

The name parameter is used to identify the subscription and is specific to the selected namespace. If the namespace parameter is `cx_Oracle.SUBSCR_NAMESPACE_DBCHANGE` then the name is optional and can be any value. If the namespace parameter is `cx_Oracle.SUBSCR_NAMESPACE_AQ`, however, the name must be in the format '<QUEUE\_NAME>' for single consumer queues and '<QUEUE\_NAME>:<CONSUMER\_NAME>' for multiple consumer queues, and identifies the queue that will be monitored for messages. The queue name may include the schema, if needed.

The clientInitiated parameter is used to determine if client initiated connections or server initiated connections (the default) will be established. Client initiated connections are only available in Oracle Client 19.4 and Oracle Database 19.4 and higher.



New in version 6.4: The parameters `ipAddress`, `groupingClass`, `groupingValue`, `groupingType` and `name` were added.

New in version 7.3: The parameter `clientInitiated` was added.

---

**Note:** This method is an extension to the DB API definition.

---



---

**Note:** The subscription can be deregistered in the database by calling the function `unsubscribe()`. If this method is not called and the connection that was used to create the subscription is explicitly closed using the function `close()`, the subscription will not be deregistered in the database.

---

#### `Connection.tag`

This read-write attribute initially contains the actual tag of the session that was acquired from a pool by `SessionPool.acquire()`. If the connection was not acquired from a pool or no tagging parameters were specified (tag and matchanytag) when the connection was acquired from the pool, this value will be `None`. If the value is changed, it must be a string containing name=value pairs like “k1=v1;k2=v2”.

If this value is not `None` when the connection is released back to the pool it will be used to retag the session. This value can be overridden in the call to `SessionPool.release()`.

---

**Note:** This attribute is an extension to the DB API definition.

---

New in version 7.1.

#### `Connection.tnsentry`

This read-only attribute returns the TNS entry of the database to which a connection has been established.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### `Connection.unsubscribe(subscr)`

Unsubscribe from events in the database that were originally subscribed to using `subscribe()`. The connection used to unsubscribe should be the same one used to create the subscription, or should access the same database and be connected as the same user name.

New in version 6.4.

#### `Connection.username`

This read-only attribute returns the name of the user which established the connection to the database.

---

**Note:** This attribute is an extension to the DB API definition.

---

#### `Connection.version`

This read-only attribute returns the version of the database to which a connection has been established.

---

**Note:** This attribute is an extension to the DB API definition.

---



---

**Note:** If you connect to Oracle Database 18 or higher with client libraries 12.2 or lower that you will only receive the base version (such as 18.0.0.0.0) instead of the full version (18.3.0.0.0).

---

## 2.3 Cursor Object

`Cursor.__enter__()`

The entry point for the cursor as a context manager. It returns itself.

---

**Note:** This method is an extension to the DB API definition.

---

`Cursor.__exit__()`

The exit point for the cursor as a context manager. It closes the cursor.

---

**Note:** This method is an extension to the DB API definition.

---

`Cursor.arraysize`

This read-write attribute specifies the number of rows to fetch at a time internally and is the default number of rows to fetch with the `fetchmany()` call. It defaults to 100 meaning to fetch 100 rows at a time. Note that this attribute can drastically affect the performance of a query since it directly affects the number of network round trips that need to be performed. This is the reason for setting it to 100 instead of the 1 that the DB API recommends.

`Cursor.bindarraysize`

This read-write attribute specifies the number of rows to bind at a time and is used when creating variables via `setinputsizes()` or `var()`. It defaults to 1 meaning to bind a single row at a time.

---

**Note:** The DB API definition does not define this attribute.

---

`Cursor.arrayvar (dataType, value[, size ])`

Create an array variable associated with the cursor of the given type and size and return a *variable object*. The value is either an integer specifying the number of elements to allocate or it is a list and the number of elements allocated is drawn from the size of the list. If the value is a list, the variable is also set with the contents of the list. If the size is not specified and the type is a string or binary, 4000 bytes is allocated. This is needed for passing arrays to PL/SQL (in cases where the list might be empty and the type cannot be determined automatically) or returning arrays from PL/SQL.

Array variables can only be used for PL/SQL associative arrays with contiguous keys. For PL/SQL associative arrays with sparsely populated keys or for varrays and nested tables, the approach shown in this [example](#) needs to be used.

---

**Note:** The DB API definition does not define this method.

---

`Cursor.bindnames ()`

Return the list of bind variable names bound to the statement. Note that a statement must have been prepared first.

---

**Note:** The DB API definition does not define this method.

---

`Cursor.bindvars`

This read-only attribute provides the bind variables used for the last execute. The value will be either a list or a dictionary depending on whether binding was done by position or name. Care should be taken when referencing this attribute. In particular, elements should not be removed or replaced.

---

**Note:** The DB API definition does not define this attribute.

---

`Cursor.callfunc (name, returnType, parameters=[], keywordParameters={})`

Call a function with the given name. The return type is specified in the same notation as is required by `setinputsizes()`. The sequence of parameters must contain one entry for each parameter that the function expects. Any keyword parameters will be included after the positional parameters. The result of the call is the return value of the function.

See [PL/SQL Stored Functions](#) for an example.

---

**Note:** The DB API definition does not define this method.

---



---

**Note:** If you intend to call `Cursor.setinputsizes()` on the cursor prior to making this call, then note that the first item in the parameter list refers to the return value of the function.

---

`Cursor.callproc (name, parameters=[], keywordParameters={})`

Call a procedure with the given name. The sequence of parameters must contain one entry for each parameter that the procedure expects. The result of the call is a modified copy of the input sequence. Input parameters are left untouched; output and input/output parameters are replaced with possibly new values. Keyword parameters will be included after the positional parameters and are not returned as part of the output sequence.

See [PL/SQL Stored Procedures](#) for an example.

---

**Note:** The DB API definition does not allow for keyword parameters.

---

`Cursor.close()`

Close the cursor now, rather than whenever `__del__` is called. The cursor will be unusable from this point forward; an Error exception will be raised if any operation is attempted with the cursor.

`Cursor.connection`

This read-only attribute returns a reference to the connection object on which the cursor was created.

---

**Note:** This attribute is an extension to the DB API definition but it is mentioned in PEP 249 as an optional extension.

---

`Cursor.description`

This read-only attribute is a sequence of 7-item sequences. Each of these sequences contains information describing one result column: (name, type, display\_size, internal\_size, precision, scale, null\_ok). This attribute will be None for operations that do not return rows or if the cursor has not had an operation invoked via the `execute()` method yet.

The type will be one of the type objects defined at the module level.

`Cursor.execute (statement[, parameters], **keywordParameters)`

Execute a statement against the database. See [SQL Execution](#).

Parameters may be passed as a dictionary or sequence or as keyword parameters. If the parameters are a dictionary, the values will be bound by name and if the parameters are a sequence the values will be bound by position. Note that if the values are bound by position, the order of the variables is from left to right as they are encountered in the statement and SQL statements are processed differently than PL/SQL statements. For this reason, it is generally recommended to bind parameters by name instead of by position.

Parameters passed as a dictionary are name and value pairs. The name maps to the bind variable name used by the statement and the value maps to the Python value you wish bound to that bind variable.

A reference to the statement will be retained by the cursor. If `None` or the same string object is passed in again, the cursor will execute that statement again without performing a prepare or rebinding and redefining. This is most effective for algorithms where the same statement is used, but different parameters are bound to it (many times). Note that parameters that are not passed in during subsequent executions will retain the value passed in during the last execution that contained them.

For maximum efficiency when reusing an statement, it is best to use the `setinputsizes()` method to specify the parameter types and sizes ahead of time; in particular, `None` is assumed to be a string of length 1 so any values that are later bound as numbers or dates will raise a `TypeError` exception.

If the statement is a query, the cursor is returned as a convenience to the caller (so it can be used directly as an iterator over the rows in the cursor); otherwise, `None` is returned.

---

**Note:** The DB API definition does not define the return value of this method.

---

`Cursor.executemany` (*statement, parameters, batcherrors=False, arraydmlrowcounts=False*)

Prepare a statement for execution against a database and then execute it against all parameter mappings or sequences found in the sequence parameters. See [Batch Statement Execution and Bulk Loading](#).

The statement is managed in the same way as the `execute()` method manages it. If the size of the buffers allocated for any of the parameters exceeds 2 GB, you will receive the error “DPI-1015: array size of <n> is too large”, where <n> varies with the size of each element being allocated in the buffer. If you receive this error, decrease the number of elements in the sequence parameters.

If there are no parameters, or parameters have previously been bound, the number of iterations can be specified as an integer instead of needing to provide a list of empty mappings or sequences.

When true, the `batcherrors` parameter enables batch error support within Oracle and ensures that the call succeeds even if an exception takes place in one or more of the sequence of parameters. The errors can then be retrieved using `getbatcherrors()`.

When true, the `arraydmlrowcounts` parameter enables DML row counts to be retrieved from Oracle after the method has completed. The row counts can then be retrieved using `getarraydmlrowcounts()`.

Both the `batcherrors` parameter and the `arraydmlrowcounts` parameter can only be true when executing an insert, update, delete or merge statement; in all other cases an error will be raised.

For maximum efficiency, it is best to use the `setinputsizes()` method to specify the parameter types and sizes ahead of time; in particular, `None` is assumed to be a string of length 1 so any values that are later bound as numbers or dates will raise a `TypeError` exception.

`Cursor.executemanyprepared` (*numIters*)

Execute the previously prepared and bound statement the given number of times. The variables that are bound must have already been set to their desired value before this call is made. This method was designed for the case where optimal performance is required as it comes at the expense of compatibility with the DB API.

---

**Note:** The DB API definition does not define this method.

---

Deprecated since version 6.4: Use `executemany()` instead with `None` for the statement argument and an integer for the parameters argument.

`Cursor.fetchall` ()

Fetch all (remaining) rows of a query result, returning them as a list of tuples. An empty list is returned if no

more rows are available. Note that the cursor's `arraysize` attribute can affect the performance of this operation, as internally reads from the database are done in batches corresponding to the `arraysize`.

An exception is raised if the previous call to `execute()` did not produce any result set or no call was issued yet.

See *Fetch Methods* for an example.

**Cursor.fetchmany** ([`numRows=cursor.arraysize` ])

Fetch the next set of rows of a query result, returning a list of tuples. An empty list is returned if no more rows are available. Note that the cursor's `arraysize` attribute can affect the performance of this operation.

The number of rows to fetch is specified by the parameter. If it is not given, the cursor's `arraysize` attribute determines the number of rows to be fetched. If the number of rows available to be fetched is fewer than the amount requested, fewer rows will be returned.

An exception is raised if the previous call to `execute()` did not produce any result set or no call was issued yet.

See *Fetch Methods* for an example.

**Cursor.fetchone** ()

Fetch the next row of a query result set, returning a single tuple or `None` when no more data is available.

An exception is raised if the previous call to `execute()` did not produce any result set or no call was issued yet.

See *Fetch Methods* for an example.

**Cursor.fetchraw** ([`numRows=cursor.arraysize` ])

Fetch the next set of rows of a query result into the internal buffers of the defined variables for the cursor. The number of rows actually fetched is returned. This method was designed for the case where optimal performance is required as it comes at the expense of compatibility with the DB API.

An exception is raised if the previous call to `execute()` did not produce any result set or no call was issued yet.

---

**Note:** The DB API definition does not define this method.

---

**Cursor.fetchvars**

This read-only attribute specifies the list of variables created for the last query that was executed on the cursor. Care should be taken when referencing this attribute. In particular, elements should not be removed or replaced.

---

**Note:** The DB API definition does not define this attribute.

---

**Cursor.getarraydmlrowcounts** ()

Retrieve the DML row counts after a call to `executemany()` with `arraydmlrowcounts` enabled. This will return a list of integers corresponding to the number of rows affected by the DML statement for each element of the array passed to `executemany()`.

---

**Note:** The DB API definition does not define this method and it is only available for Oracle 12.1 and higher.

---

**Cursor.getbatcherrors** ()

Retrieve the exceptions that took place after a call to `executemany()` with `batcherrors` enabled. This will return a list of Error objects, one error for each iteration that failed. The offset can be determined by looking at the `offset` attribute of the error object.

---

**Note:** The DB API definition does not define this method.

---

`Cursor.getimplicitresults()`

Return a list of cursors which correspond to implicit results made available from a PL/SQL block or procedure without the use of OUT ref cursor parameters. The PL/SQL block or procedure opens the cursors and marks them for return to the client using the procedure `dbms_sql.return_result`. Cursors returned in this fashion should not be closed. They will be closed automatically by the parent cursor when it is closed. Closing the parent cursor will invalidate the cursors returned by this method.

New in version 5.3.

---

**Note:** The DB API definition does not define this method and it is only available for Oracle Database 12.1 (both client and server must be at this level or higher). It is most like the DB API method `nextset()`, but unlike that method (which requires that the next result set overwrite the current result set), this method returns cursors which can be fetched independently of each other.

---

`Cursor.inputtypehandler`

This read-write attribute specifies a method called for each value that is bound to a statement executed on the cursor and overrides the attribute with the same name on the connection if specified. The method signature is `handler(cursor, value, arraysize)` and the return value is expected to be a variable object or `None` in which case a default variable object will be created. If this attribute is `None`, the value of the attribute with the same name on the connection is used.

---

**Note:** This attribute is an extension to the DB API definition.

---

`Cursor.__iter__()`

Returns the cursor itself to be used as an iterator.

---

**Note:** This method is an extension to the DB API definition but it is mentioned in PEP 249 as an optional extension.

---

`Cursor.lastrowid`

This read-only attribute returns the rowid of the last row modified by the cursor. If no row was modified by the last operation performed on the cursor, the value `None` is returned.

New in version 7.3.

`Cursor.outputtypehandler`

This read-write attribute specifies a method called for each column that is to be fetched from this cursor. The method signature is `handler(cursor, name, defaultType, length, precision, scale)` and the return value is expected to be a variable object or `None` in which case a default variable object will be created. If this attribute is `None`, the value of the attribute with the same name on the connection is used instead.

See *Changing Fetched Data Types with Output Type Handlers*.

---

**Note:** This attribute is an extension to the DB API definition.

---

`Cursor.parse(statement)`

This can be used to parse a statement without actually executing it (this step is done automatically by Oracle when a statement is executed).

---

**Note:** The DB API definition does not define this method.

---



---

**Note:** You can parse any DML or DDL statement. DDL statements are executed immediately and an implied commit takes place.

---

`Cursor.prepare(statement[, tag])`

This can be used before a call to `execute()` to define the statement that will be executed. When this is done, the prepare phase will not be performed when the call to `execute()` is made with `None` or the same string object as the statement. If specified the statement will be returned to the statement cache with the given tag. See the Oracle documentation for more information about the statement cache.

---

**Note:** The DB API definition does not define this method.

---

`Cursor.rowcount`

This read-only attribute specifies the number of rows that have currently been fetched from the cursor (for select statements), that have been affected by the operation (for insert, update, delete and merge statements), or the number of successful executions of the statement (for PL/SQL statements).

`Cursor.rowfactory`

This read-write attribute specifies a method to call for each row that is retrieved from the database. Ordinarily a tuple is returned for each row but if this attribute is set, the method is called with the tuple that would normally be returned, and the result of the method is returned instead.

---

**Note:** The DB API definition does not define this attribute.

---

`Cursor.scroll(value=0, mode="relative")`

Scroll the cursor in the result set to a new position according to the mode.

If mode is “relative” (the default value), the value is taken as an offset to the current position in the result set. If set to “absolute”, value states an absolute target position. If set to “first”, the cursor is positioned at the first row and if set to “last”, the cursor is set to the last row in the result set.

An error is raised if the mode is “relative” or “absolute” and the scroll operation would position the cursor outside of the result set.

New in version 5.3.

---

**Note:** This method is an extension to the DB API definition but it is mentioned in PEP 249 as an optional extension.

---

`Cursor.scrollable`

This read-write boolean attribute specifies whether the cursor can be scrolled or not. By default, cursors are not scrollable, as the server resources and response times are greater than nonscrollable cursors. This attribute is checked and the corresponding mode set in Oracle when calling the method `execute()`.

New in version 5.3.

---

**Note:** The DB API definition does not define this attribute.

---

`Cursor.setinputsizes(*args, **keywordArgs)`

This can be used before a call to `execute()`, `callfunc()` or `callproc()` to predefine memory areas for the operation's parameters. Each parameter should be a type object corresponding to the input that will be used or it should be an integer specifying the maximum length of a string parameter. Use keyword parameters when binding by name and positional parameters when binding by position. The singleton `None` can be used as a parameter when using positional parameters to indicate that no space should be reserved for that position.

---

**Note:** If you plan to use `callfunc()` then be aware that the first parameter in the list refers to the return value of the function.

---

`Cursor.setoutputsize(size[, column])`

This method does nothing and is retained solely for compatibility with the DB API. The module automatically allocates as much space as needed to fetch LONG and LONG RAW columns (or CLOB as string and BLOB as bytes).

`Cursor.statement`

This read-only attribute provides the string object that was previously prepared with `prepare()` or executed with `execute()`.

---

**Note:** The DB API definition does not define this attribute.

---

`Cursor.var(dtype[, size, arraysize, inconverter, outconverter, typename, encodingErrors])`

Create a variable with the specified characteristics. This method was designed for use with PL/SQL in/out variables where the length or type cannot be determined automatically from the Python object passed in or for use in input and output type handlers defined on cursors or connections.

The `dtype` parameter specifies the type of data that should be stored in the variable. This should be one of the types defined at the module level (such as `cx_Oracle.STRING`) or a Python type that `cx_Oracle` knows how to process (such as `str`) or an object type returned from the method `Connection.gettype()`.

The `size` parameter specifies the length of string and raw variables and is ignored in all other cases. If not specified for string and raw variables, the value 4000 is used.

The `arraysize` parameter specifies the number of elements the variable will have. If not specified the bind array size (usually 1) is used. When a variable is created in an output type handler this parameter should be set to the cursor's array size.

The `inconverter` and `outconverter` parameters specify methods used for converting values to/from the database. More information can be found in the section on *variable objects*.

The `typename` parameter specifies the name of a SQL object type and must be specified when using type `cx_Oracle.OBJECT` unless the type object was passed directly as the first parameter.

The `encodingErrors` parameter specifies what should happen when decoding byte strings fetched from the database into strings (Python 3) or unicode objects (Python 2). It should be one of the values noted in the builtin `decode` function.

---

**Note:** The DB API definition does not define this method.

---

## 2.4 Variable Objects



---

**Note:** The DB API definition does not define this object.

---

**Variable.actualElements**

This read-only attribute returns the actual number of elements in the variable. This corresponds to the number of elements in a PL/SQL index-by table for variables that are created using the method `Cursor.arrayvar()`. For all other variables this value will be identical to the attribute `numElements`.

**Variable.bufferSize**

This read-only attribute returns the size of the buffer allocated for each element in bytes.

**Variable.getvalue([pos=0])**

Return the value at the given position in the variable. For variables created using the method `Cursor.arrayvar()` the value returned will be a list of each of the values in the PL/SQL index-by table. For variables bound to DML returning statements, the value returned will also be a list corresponding to the returned data for the given execution of the statement (as identified by the `pos` parameter).

**Variable.inconverter**

This read-write attribute specifies the method used to convert data from Python to the Oracle database. The method signature is `converter(value)` and the expected return value is the value to bind to the database. If this attribute is `None`, the value is bound directly without any conversion.

**Variable.numElements**

This read-only attribute returns the number of elements allocated in an array, or the number of scalar items that can be fetched into the variable or bound to the variable.

**Variable.outconverter**

This read-write attribute specifies the method used to convert data from from the Oracle to Python. The method signature is `converter(value)` and the expected return value is the value to return to Python. If this attribute is `None`, the value is returned directly without any conversion.

**Variable.setvalue(pos, value)**

Set the value at the given position in the variable.

**Variable.size**

This read-only attribute returns the size of the variable. For strings this value is the size in characters. For all others, this is same value as the attribute `bufferSize`.

**Variable.type**

This read-only attribute returns the type of the variable for those variables that bind Oracle objects (it is not present for any other type of variable).

**Variable.values**

This read-only attribute returns a copy of the value of all actual positions in the variable as a list. This is the equivalent of calling `getvalue()` for each valid position and the length will correspond to the value of the `actualElements` attribute.

## 2.5 SessionPool Object

---

**Note:** This object is an extension to the DB API.

Connection pooling in `cx_Oracle` is handled by `SessionPool` objects.

See [Connection Pooling](#) for information on connection pooling.

---

`SessionPool.acquire` (*user=None, password=None, cclass=None, purity=*`cx_Oracle.ATTR_PURITY_DEFAULT`*, tag=None, matchanytag=False, shardingkey=[], supershardingkey=[]*)

Acquire a connection from the session pool and return a *connection object*.

If the pool is homogeneous, the user and password parameters cannot be specified. If they are, an exception will be raised.

The `cclass` parameter, if specified, should be a string corresponding to the connection class for database resident connection pooling (DRCP).

The `purity` parameter is expected to be one of `ATTR_PURITY_NEW`, `ATTR_PURITY_SELF`, or `ATTR_PURITY_DEFAULT`.

The `tag` parameter, if specified, is expected to be a string with name=value pairs like “k1=v1;k2=v2” and will limit the sessions that can be returned from a session pool unless the `matchanytag` parameter is set to `True`. In that case sessions with the specified tag will be preferred over others, but if no such sessions are available a session with a different tag may be returned instead. In any case, untagged sessions will always be returned if no sessions with the specified tag are available. Sessions are tagged when they are *released* back to the pool.

The `shardingkey` and `supershardingkey` parameters, if specified, are expected to be a sequence of values which will be used to identify the database shard to connect to. The key values can be strings, numbers, bytes or dates.

`SessionPool.busy`

This read-only attribute returns the number of sessions currently acquired.

`SessionPool.close` (*force=False*)

Close the session pool now, rather than when the last reference to it is released, which makes it unusable for further work.

If any connections have been acquired and not released back to the pool this method will fail unless the `force` parameter is set to `True`.

`SessionPool.drop` (*connection*)

Drop the connection from the pool which is useful if the connection is no longer usable (such as when the session is killed).

`SessionPool.dsn`

This read-only attribute returns the TNS entry of the database to which a connection has been established.

`SessionPool.homogeneous`

This read-write boolean attribute indicates whether the pool is considered homogeneous or not. If the pool is not homogeneous different authentication can be used for each connection acquired from the pool.

`SessionPool.increment`

This read-only attribute returns the number of sessions that will be established when additional sessions need to be created.

`SessionPool.max`

This read-only attribute returns the maximum number of sessions that the session pool can control.

`SessionPool.max_lifetime_session`

This read-write attribute returns the maximum length of time (in seconds) that a pooled session may exist. Sessions that are in use will not be closed. They become candidates for termination only when they are released back to the pool and have existed for longer than `max_lifetime_session` seconds. Note that termination only occurs when the pool is accessed. A value of 0 means that there is no maximum length of time that a pooled session may exist. This attribute is only available in Oracle Database 12.1.

New in version 5.3.

**SessionPool.min**

This read-only attribute returns the number of sessions with which the session pool was created and the minimum number of sessions that will be controlled by the session pool.

**SessionPool.name**

This read-only attribute returns the name assigned to the session pool by Oracle.

**SessionPool.opened**

This read-only attribute returns the number of sessions currently opened by the session pool.

**SessionPool.release** (*connection*, *tag=None*)

Release the connection back to the pool now, rather than whenever `__del__` is called. The connection will be unusable from this point forward; an Error exception will be raised if any operation is attempted with the connection. Any cursors or LOBs created by the connection will also be marked unusable and an Error exception will be raised if any operation is attempted with them.

Internally, references to the connection are held by cursor objects, LOB objects, etc. Once all of these references are released, the connection itself will be released back to the pool automatically. Either control references to these related objects carefully or explicitly release connections back to the pool in order to ensure sufficient resources are available.

If the tag is not None, it is expected to be a string with name=value pairs like “k1=v1;k2=v2” and will override the value in the property `Connection.tag`. If either `Connection.tag` or the tag parameter are not None, the connection will be retagged when it is released back to the pool.

**SessionPool.stmtcachesize**

This read-write attribute specifies the size of the statement cache that will be used as the starting point for any connections that are created by the session pool. Once created, the connection’s statement cache size can only be changed by setting the stmtcachesize attribute on the connection itself.

New in version 6.0.

**SessionPool.timeout**

This read-write attribute specifies the time (in seconds) after which idle sessions will be terminated in order to maintain an optimum number of open sessions. Note that termination only occurs when the pool is accessed. A value of 0 means that no idle sessions are terminated.

**SessionPool.tnsentry**

This read-only attribute returns the TNS entry of the database to which a connection has been established.

**SessionPool.username**

This read-only attribute returns the name of the user which established the connection to the database.

**SessionPool.wait\_timeout**

This read-write attribute specifies the time (in milliseconds) that the caller should wait for a session to become available in the pool before returning with an error. This value is only used if the getmode parameter to `cx_Oracle.SessionPool()` was the value `cx_Oracle.SPOOL_ATTRVAL_TIMEDWAIT`.

New in version 6.4.

## 2.6 Subscription Object

---

**Note:** This object is an extension the DB API.

---

**Subscription.callback**

This read-only attribute returns the callback that was registered when the subscription was created.

**Subscription.connection**

This read-only attribute returns the connection that was used to register the subscription when it was created.

**Subscription.id**

This read-only attribute returns the value of REGID found in the database view USER\_CHANGE\_NOTIFICATION\_REGS or the value of REG\_ID found in the database view USER\_SUBSCR\_REGISTRATIONS. For AQ subscriptions, the value is 0.

**Subscription.ipAddress**

This read-only attribute returns the IP address used for callback notifications from the database server. If not set during construction, this value is None.

New in version 6.4.

**Subscription.name**

This read-only attribute returns the name used to register the subscription when it was created.

New in version 6.4.

**Subscription.namespace**

This read-only attribute returns the namespace used to register the subscription when it was created.

**Subscription.operations**

This read-only attribute returns the operations that will send notifications for each table or query that is registered using this subscription.

**Subscription.port**

This read-only attribute returns the port used for callback notifications from the database server. If not set during construction, this value is zero.

**Subscription.protocol**

This read-only attribute returns the protocol used to register the subscription when it was created.

**Subscription.qos**

This read-only attribute returns the quality of service flags used to register the subscription when it was created.

**Subscription.registerquery** (*statement* [, *args* ])

Register the query for subsequent notification when tables referenced by the query are changed. This behaves similarly to cursor.execute() but only queries are permitted and the args parameter must be a sequence or dictionary. If the qos parameter included the flag cx\_Oracle.SUBSCR\_QOS\_QUERY when the subscription was created, then the ID for the registered query is returned; otherwise, None is returned.

**Subscription.timeout**

This read-only attribute returns the timeout (in seconds) that was specified when the subscription was created. A value of 0 indicates that there is no timeout.

## 2.6.1 Message Objects

---

**Note:** This object is created internally when notification is received and passed to the callback procedure specified when a subscription is created.

---

**Message.consumerName**

This read-only attribute returns the name of the consumer which generated the notification. It will be populated if the subscription was created with the namespace *cx\_Oracle.SUBSCR\_NAMESPACE\_AQ* and the queue is a multiple consumer queue.

New in version 6.4.

**Message.dbname**

This read-only attribute returns the name of the database that generated the notification.

**Message.queries**

This read-only attribute returns a list of message query objects that give information about query result sets changed for this notification. This attribute will be None if the qos parameter did not include the flag `SUBSCR_QOS_QUERY` when the subscription was created.

**Message.queueName**

This read-only attribute returns the name of the queue which generated the notification. It will only be populated if the subscription was created with the namespace `cx_Oracle.SUBSCR_NAMESPACE_AQ`.

New in version 6.4.

**Message.registered**

This read-only attribute returns whether the subscription which generated this notification is still registered with the database. The subscription is automatically deregistered with the database when the subscription timeout value is reached or when the first notification is sent (when the quality of service flag `cx_Oracle.SUBSCR_QOS_DEREG_NFY` is used).

New in version 6.4.

**Message.subscription**

This read-only attribute returns the subscription object for which this notification was generated.

**Message.tables**

This read-only attribute returns a list of message table objects that give information about the tables changed for this notification. This attribute will be None if the qos parameter included the flag `SUBSCR_QOS_QUERY` when the subscription was created.

**Message.txid**

This read-only attribute returns the id of the transaction that generated the notification.

**Message.type**

This read-only attribute returns the type of message that has been sent. See the constants section on event types for additional information.

## 2.6.2 Message Table Objects

---

**Note:** This object is created internally for each table changed when notification is received and is found in the tables attribute of message objects, and the tables attribute of message query objects.

---

**MessageTable.name**

This read-only attribute returns the name of the table that was changed.

**MessageTable.operation**

This read-only attribute returns the operation that took place on the table that was changed.

**MessageTable.rows**

This read-only attribute returns a list of message row objects that give information about the rows changed on the table. This value is only filled in if the qos parameter to the `Connection.subscribe()` method included the flag `SUBSCR_QOS_ROWIDS`.

## 2.6.3 Message Row Objects

---

**Note:** This object is created internally for each row changed on a table when notification is received and is found in the rows attribute of message table objects.

---

MessageRow.**operation**

This read-only attribute returns the operation that took place on the row that was changed.

MessageRow.**rowid**

This read-only attribute returns the rowid of the row that was changed.

## 2.6.4 Message Query Objects

---

**Note:** This object is created internally for each query result set changed when notification is received and is found in the queries attribute of message objects.

---

MessageQuery.**id**

This read-only attribute returns the query id of the query for which the result set changed. The value will match the value returned by Subscription.registerquery when the related query was registered.

MessageQuery.**operation**

This read-only attribute returns the operation that took place on the query result set that was changed. Valid values for this attribute are *EVENT\_DEREG* and *EVENT\_QUERYCHANGE*.

MessageQuery.**tables**

This read-only attribute returns a list of message table objects that give information about the table changes that caused the query result set to change for this notification.

## 2.7 LOB Objects

See *Using CLOB and BLOB Data* for more information about using LOBs.

---

**Note:** This object is an extension the DB API. It is returned whenever Oracle CLOB, BLOB and BFILE columns are fetched.

---

LOB.**close** ()

Close the LOB. Call this when writing is completed so that the indexes associated with the LOB can be updated – but only if *open* () was called first.

LOB.**fileexists** ()

Return a boolean indicating if the file referenced by the BFILE type LOB exists.

LOB.**getchunksize** ()

Return the chunk size for the internal LOB. Reading and writing to the LOB in chunks of multiples of this size will improve performance.

LOB.**getfilename** ()

Return a two-tuple consisting of the directory alias and file name for a BFILE type LOB.

LOB.**isopen** ()

Return a boolean indicating if the LOB has been opened using the method *open* () .

**LOB.open()**

Open the LOB for writing. This will improve performance when writing to a LOB in chunks and there are functional or extensible indexes associated with the LOB. If this method is not called, each write will perform an open internally followed by a close after the write has been completed.

**LOB.read()** (*offset=1*, *amount*)

Return a portion (or all) of the data in the LOB object. Note that the amount and offset are in bytes for BLOB and BFILE type LOBs and in UCS-2 code points for CLOB and NCLOB type LOBs. UCS-2 code points are equivalent to characters for all but supplemental characters. If supplemental characters are in the LOB, the offset and amount will have to be chosen carefully to avoid splitting a character.

**LOB.setfilename** (*dirAlias*, *name*)

Set the directory alias and name of the BFILE type LOB.

**LOB.size()**

Returns the size of the data in the LOB object. For BLOB and BFILE type LOBs this is the number of bytes. For CLOB and NCLOB type LOBs this is the number of UCS-2 code points. UCS-2 code points are equivalent to characters for all but supplemental characters.

**LOB.trim** (*newSize=0*)

Trim the LOB to the new size.

**LOB.write** (*data*, *offset=1*)

Write the data to the LOB object at the given offset. The offset is in bytes for BLOB type LOBs and in UCS-2 code points for CLOB and NCLOB type LOBs. UCS-2 code points are equivalent to characters for all but supplemental characters. If supplemental characters are in the LOB, the offset will have to be chosen carefully to avoid splitting a character. Note that if you want to make the LOB value smaller, you must use the `trim()` function.

## 2.8 Object Type Objects

---

**Note:** This object is an extension to the DB API. It is returned by the `Connection.gettype()` call and is available as the `Variable.type` for variables containing Oracle objects.

---

**ObjectType** (*sequence*)

The object type may be called directly and serves as an alternative way of calling `newobject()`.

**ObjectType.attributes**

This read-only attribute returns a list of the attributes that make up the object type. Each attribute has a name attribute on it.

**ObjectType.iscollection**

This read-only attribute returns a boolean indicating if the object type refers to a collection or not.

**ObjectType.name**

This read-only attribute returns the name of the type.

**ObjectType.newobject** (*sequence*)

Return a new Oracle object of the given type. This object can then be modified by setting its attributes and then bound to a cursor for interaction with Oracle. If the object type refers to a collection, a sequence may be passed and the collection will be initialized with the items in that sequence.

**ObjectType.schema**

This read-only attribute returns the name of the schema that owns the type.

## 2.8.1 Object Objects

---

**Note:** This object is an extension to the DB API. It is returned by the `ObjectType.newobject()` call and can be bound to variables of type `OBJECT`. Attributes can be retrieved and set directly.

---

`Object.append(element)`

Append an element to the collection object. If no elements exist in the collection, this creates an element at index 0; otherwise, it creates an element immediately following the highest index available in the collection.

`Object.asdict()`

Return a dictionary where the collection's indexes are the keys and the elements are its values.

New in version 7.0.

`Object.aslist()`

Return a list of each of the collection's elements in index order.

`Object.copy()`

Create a copy of the object and return it.

`Object.delete(index)`

Delete the element at the specified index of the collection. If the element does not exist or is otherwise invalid, an error is raised. Note that the indices of the remaining elements in the collection are not changed. In other words, the delete operation creates holes in the collection.

`Object.exists(index)`

Return True or False indicating if an element exists in the collection at the specified index.

`Object.extend(sequence)`

Append all of the elements in the sequence to the collection. This is the equivalent of performing `append()` for each element found in the sequence.

`Object.first()`

Return the index of the first element in the collection. If the collection is empty, None is returned.

`Object.getelement(index)`

Return the element at the specified index of the collection. If no element exists at that index, an exception is raised.

`Object.last()`

Return the index of the last element in the collection. If the collection is empty, None is returned.

`Object.next(index)`

Return the index of the next element in the collection following the specified index. If there are no elements in the collection following the specified index, None is returned.

`Object.prev(index)`

Return the index of the element in the collection preceding the specified index. If there are no elements in the collection preceding the specified index, None is returned.

`Object.setelement(index, value)`

Set the value in the collection at the specified index to the given value.

`Object.size()`

Return the number of elements in the collection.

`Object.trim(num)`

Remove the specified number of elements from the end of the collection.



## 2.9 Advanced Queuing (AQ)

See *Oracle Advanced Queuing (AQ)* for more information about using AQ in cx\_Oracle.

---

**Note:** All of these objects are extensions to the DB API.

---

### 2.9.1 Queues

These objects are created using the `Connection.queue()` method and are used to enqueue and dequeue messages.

#### `Queue.connection`

This read-only attribute returns a reference to the connection object on which the queue was created.

#### `Queue.deqMany(maxMessages)`

Dequeues up to the specified number of messages from the queue and returns a list of these messages. Each element of the returned list is a *message property* object.

#### `Queue.deqOne()`

Dequeues at most one message from the queue. If a message is dequeued, it will be a *message property* object; otherwise, it will be the value `None`.

#### `Queue.deqOptions`

This read-only attribute returns a reference to the *options* that will be used when dequeuing messages from the queue.

#### `Queue.enqOne(message)`

Enqueues a single message into the queue. The message must be a *message property* object which has had its `payload` attribute set to a value that the queue supports.

#### `Queue.enqMany(messages)`

Enqueues multiple messages into the queue. The `messages` parameter must be a sequence containing *message property* objects which have all had their `payload` attribute set to a value that the queue supports.

Warning: calling this function in parallel on different connections acquired from the same pool may fail due to Oracle bug 29928074. Ensure that this function is not run in parallel, use standalone connections or connections from different pools, or make multiple calls to `Queue.enqOne()` instead. The function `Queue.deqMany()` call is not affected.

#### `Queue.enqOptions`

This read-only attribute returns a reference to the *options* that will be used when enqueueing messages into the queue.

#### `Queue.name`

This read-only attribute returns the name of the queue.

#### `Queue.payloadType`

This read-only attribute returns the object type for payloads that can be enqueued and dequeued. If using a raw queue, this returns the value `None`.

### 2.9.2 Dequeue Options

---

**Note:** These objects are used to configure how messages are dequeued from queues. An instance of this object is found in the attribute *Queue.deqOptions*.

---

**DeqOptions.condition**

This attribute specifies a boolean expression similar to the where clause of a SQL query. The boolean expression can include conditions on message properties, user data properties and PL/SQL or SQL functions. The default is to have no condition specified.

**DeqOptions.consumername**

This attribute specifies the name of the consumer. Only messages matching the consumer name will be accessed. If the queue is not set up for multiple consumers this attribute should not be set. The default is to have no consumer name specified.

**DeqOptions.correlation**

This attribute specifies the correlation identifier of the message to be dequeued. Special pattern-matching characters, such as the percent sign (%) and the underscore (\_), can be used. If multiple messages satisfy the pattern, the order of dequeuing is indeterminate. The default is to have no correlation specified.

**DeqOptions.deliverymode**

This write-only attribute specifies what types of messages should be dequeued. It should be one of the values *MSG\_PERSISTENT* (default), *MSG\_BUFFERED* or *MSG\_PERSISTENT\_OR\_BUFFERED*.

**DeqOptions.mode**

This attribute specifies the locking behaviour associated with the dequeue operation. It should be one of the values *DEQ\_BROWSE*, *DEQ\_LOCKED*, *DEQ\_REMOVE* (default), or *DEQ\_REMOVE\_NODATA*.

**DeqOptions.msgid**

This attribute specifies the identifier of the message to be dequeued. The default is to have no message identifier specified.

**DeqOptions.navigation**

This attribute specifies the position of the message that is retrieved. It should be one of the values *DEQ\_FIRST\_MSG*, *DEQ\_NEXT\_MSG* (default), or *DEQ\_NEXT\_TRANSACTION*.

**DeqOptions.transformation**

This attribute specifies the name of the transformation that must be applied after the message is dequeued from the database but before it is returned to the calling application. The transformation must be created using *dbms\_transform*. The default is to have no transformation specified.

**DeqOptions.visibility**

This attribute specifies the transactional behavior of the dequeue request. It should be one of the values *DEQ\_ON\_COMMIT* (default) or *DEQ\_IMMEDIATE*. This attribute is ignored when using the *DEQ\_BROWSE* mode. Note the value of *autocommit* is always ignored.

**DeqOptions.wait**

This attribute specifies the time to wait, in seconds, for a message matching the search criteria to become available for dequeuing. One of the values *DEQ\_NO\_WAIT* or *DEQ\_WAIT\_FOREVER* can also be used. The default is *DEQ\_WAIT\_FOREVER*.

## 2.9.3 Enqueue Options

---

**Note:** These objects are used to configure how messages are enqueued into queues. An instance of this object is found in the attribute *Queue.enqOptions*.

---

#### EnqOptions.deliverymode

This write-only attribute specifies what type of messages should be enqueued. It should be one of the values *MSG\_PERSISTENT* (default) or *MSG\_BUFFERED*.

#### EnqOptions.transformation

This attribute specifies the name of the transformation that must be applied before the message is enqueued into the database. The transformation must be created using *dbms\_transform*. The default is to have no transformation specified.

#### EnqOptions.visibility

This attribute specifies the transactional behavior of the enqueue request. It should be one of the values *ENQ\_ON\_COMMIT* (default) or *ENQ\_IMMEDIATE*. Note the value of *autocommit* is ignored.

## 2.9.4 Message Properties

---

**Note:** These objects are used to identify the properties of messages that are enqueued and dequeued in queues. They are created by the method *Connection.msgproperties()*. They are used by the methods *Queue.enqueue()* and *Queue.enqueueMany()* and returned by the methods *Queue.dequeue()* and *Queue.dequeueMany()*.

---

#### MessageProperties.attempts

This read-only attribute specifies the number of attempts that have been made to dequeue the message.

#### MessageProperties.correlation

This attribute specifies the correlation used when the message was enqueued.

#### MessageProperties.delay

This attribute specifies the number of seconds to delay an enqueued message. Any integer is acceptable but the constant *MSG\_NO\_DELAY* can also be used indicating that the message is available for immediate dequeuing.

#### MessageProperties.deliverymode

This read-only attribute specifies the type of message that was dequeued. It will be one of the values *MSG\_PERSISTENT* or *MSG\_BUFFERED*.

#### MessageProperties.enqtime

This read-only attribute specifies the time that the message was enqueued.

#### MessageProperties.exceptionq

This attribute specifies the name of the queue to which the message is moved if it cannot be processed successfully. Messages are moved if the number of unsuccessful dequeue attempts has exceeded the maximum number of retries or if the message has expired. All messages in the exception queue are in the *MSG\_EXPIRED* state. The default value is the name of the exception queue associated with the queue table.

#### MessageProperties.expiration

This attribute specifies, in seconds, how long the message is available for dequeuing. This attribute is an offset from the delay attribute. Expiration processing requires the queue monitor to be running. Any integer is accepted but the constant *MSG\_NO\_EXPIRATION* can also be used indicating that the message never expires.

#### MessageProperties.msgid

This attribute specifies the id of the message in the last queue that generated this message.

#### MessageProperties.payload

This attribute identifies the payload that will be enqueued or the payload that was dequeued when using a *queue*. When enqueueing, the value is checked to ensure that it conforms to the type expected by that queue. For RAW queues, the value can be a bytes object or a string. If the value is a string it will first be converted to bytes by encoding in the encoding identified by the attribute *Connection.encoding*.

**MessageProperties.priority**

This attribute specifies the priority of the message. A smaller number indicates a higher priority. The priority can be any integer, including negative numbers. The default value is zero.

**MessageProperties.state**

This read-only attribute specifies the state of the message at the time of the dequeue. It will be one of the values `MSG_WAITING`, `MSG_READY`, `MSG_PROCESSED` or `MSG_EXPIRED`.

## 2.10 SODA

Oracle Database Simple Oracle Document Access (SODA) allows documents to be inserted, queried, and retrieved from Oracle Database using a set of NoSQL-style cx\_Oracle methods.

See *Simple Oracle Document Access (SODA)* for a cx\_Oracle example.

SODA requires Oracle Client 18.3 or higher and Oracle Database 18.1 and higher. The role SODA\_APP must be granted to the user.

See [this tracking issue](#) for known issues with SODA.

### 2.10.1 SODA Database Object

---

**Note:** This object is an extension the DB API. It is returned by the method `Connection.getSodaDatabase()`.

---

**SodaDatabase.createCollection** (*name*, *metadata=None*, *mapMode=False*)

Creates a SODA collection with the given name and returns a new *SODA collection object*. If you try to create a collection, and a collection with the same name and metadata already exists, then that existing collection is opened without error.

If metadata is specified, it is expected to be a string containing valid JSON or a dictionary that will be transformed into a JSON string. This JSON permits you to specify the configuration of the collection including storage options; specifying the presence or absence of columns for creation timestamp, last modified timestamp and version; whether the collection can store only JSON documents; and methods of key and version generation. The default metadata creates a collection that only supports JSON documents and uses system generated keys. See this [collection metadata reference](#) for more information.

If the mapMode parameter is set to True, the new collection is mapped to an existing table instead of creating a table. If a collection is created in this way, dropping the collection will not drop the existing table either.

New in version 7.0.

**SodaDatabase.createDocument** (*content*, *key=None*, *mediaType="application/json"*)

Creates a *SODA document* usable for SODA write operations. You only need to use this method if your collection requires client-assigned keys or has non-JSON content; otherwise, you can pass your content directly to SODA write operations. SodaDocument attributes 'createdOn', 'lastModified' and 'version' will be None.

The content parameter can be a dictionary or list which will be transformed into a JSON string and then UTF-8 encoded. It can also be a string which will be UTF-8 encoded or it can be a bytes object which will be stored unchanged. If a bytes object is provided and the content is expected to be JSON, note that SODA only supports UTF-8, UTF-16LE and UTF-16BE encodings.

The key parameter should only be supplied if the collection in which the document is to be placed requires client-assigned keys.

The `mediaType` parameter should only be supplied if the collection in which the document is to be placed supports non-JSON documents and the content for this document is non-JSON. Using a standard MIME type for this value is recommended but any string will be accepted.

New in version 7.0.

`SodaDatabase.getCollectionNames` (*startName=None, limit=0*)

Returns a list of the names of collections in the database that match the criteria, in alphabetical order.

If the `startName` parameter is specified, the list of names returned will start with this value and also contain any names that fall after this value in alphabetical order.

If the `limit` parameter is specified and is non-zero, the number of collection names returned will be limited to this value.

New in version 7.0.

`SodaDatabase.openCollection` (*name*)

Opens an existing collection with the given name and returns a new *SODA collection object*. If a collection with that name does not exist, `None` is returned.

New in version 7.0.

## 2.10.2 SODA Collection Object

---

**Note:** This object is an extension the DB API. It is used to represent SODA collections and is created by methods `SodaDatabase.createCollection()` and `SodaDatabase.openCollection()`.

---

`SodaCollection.createIndex` (*spec*)

Creates an index on a SODA collection. The `spec` is expected to be a dictionary or a JSON-encoded string. See this [overview](#) for information on indexes in SODA.

Note that a commit should be performed before attempting to create an index.

New in version 7.0.

`SodaCollection.drop` ()

Drops the collection from the database, if it exists. Note that if the collection was created with `mapMode` set to `True` the underlying table will not be dropped.

A boolean value is returned indicating if the collection was actually dropped.

New in version 7.0.

`SodaCollection.dropIndex` (*name, force=False*)

Drops the index with the specified name, if it exists.

The `force` parameter, if set to `True`, can be used to force the dropping of an index that the underlying Oracle Database domain index doesn't normally permit. This is only applicable to spatial and JSON search indexes. See [here](#) for more information.

A boolean value is returned indicating if the index was actually dropped.

New in version 7.0.

`SodaCollection.find` ()

This method is used to begin an operation that will act upon documents in the collection. It creates and returns a *SodaOperation object* which is used to specify the criteria and the operation that will be performed on the documents that match that criteria.

New in version 7.0.

`SodaCollection.getDataGuide()`

Returns a *SODA document object* containing property names, data types and lengths inferred from the JSON documents in the collection. It can be useful for exploring the schema of a collection. Note that this method is only supported for JSON-only collections where a JSON search index has been created with the 'dataguide' option enabled. If there are no documents in the collection, None is returned.

New in version 7.0.

`SodaCollection.insertMany(docs)`

Inserts a list of documents into the collection at one time. Each of the input documents can be a dictionary or list or an existing *SODA document object*.

---

**Note:** This method requires Oracle Client 18.5 and higher and is available only as a preview.

---

New in version 7.2.

`SodaCollection.insertManyAndGet(docs)`

Similarly to *insertMany()* this method inserts a list of documents into the collection at one time. The only difference is that it returns a list of *SODA Document objects*. Note that for performance reasons the returned documents do not contain the content.

---

**Note:** This method requires Oracle Client 18.5 and higher.

---

New in version 7.2.

`SodaCollection.insertOne(doc)`

Inserts a given document into the collection. The input document can be a dictionary or list or an existing *SODA document object*.

New in version 7.0.

`SodaCollection.insertOneAndGet(doc)`

Similarly to *insertOne()* this method inserts a given document into the collection. The only difference is that it returns a *SODA Document object*. Note that for performance reasons the returned document does not contain the content.

New in version 7.0.

`SodaCollection.metadata`

This read-only attribute returns a dictionary containing the metadata that was used to create the collection. See this [collection metadata reference](#) for more information.

New in version 7.0.

`SodaCollection.name`

This read-only attribute returns the name of the collection.

New in version 7.0.

## 2.10.3 SODA Document Object

---

**Note:** This object is an extension the DB API. It is returned by the methods *SodaDatabase.createDocument()*, *SodaOperation.getDocuments()* and *SodaOperation.getOne()* as well as by iterating over *SODA document cursors*.

---

**SodaDoc.createdOn**

This read-only attribute returns the creation time of the document in [ISO 8601](#) format. Documents created by [SodaDatabase.createDocument\(\)](#) or fetched from collections where this attribute is not stored will return None.

New in version 7.0.

**SodaDoc.getContent()**

Returns the content of the document as a dictionary or list. This method assumes that the content is application/json and will raise an exception if this is not the case. If there is no content, however, None will be returned.

New in version 7.0.

**SodaDoc.getContentAsBytes()**

Returns the content of the document as a bytes object. If there is no content, however, None will be returned.

New in version 7.0.

**SodaDoc.getContentAsString()**

Returns the content of the document as a string. If the document encoding is not known, UTF-8 will be used. If there is no content, however, None will be returned.

New in version 7.0.

**SodaDoc.key**

This read-only attribute returns the unique key assigned to this document. Documents created by [SodaDatabase.createDocument\(\)](#) may not have a value assigned to them and return None.

New in version 7.0.

**SodaDoc.lastModified**

This read-only attribute returns the last modified time of the document in [ISO 8601](#) format. Documents created by [SodaDatabase.createDocument\(\)](#) or fetched from collections where this attribute is not stored will return None.

New in version 7.0.

**SodaDoc.mediaType**

This read-only attribute returns the media type assigned to the document. By convention this is expected to be a MIME type but no checks are performed on this value. If a value is not specified when calling [SodaDatabase.createDocument\(\)](#) or the document is fetched from a collection where this component is not stored, the string “application/json” is returned.

New in version 7.0.

**SodaDoc.version**

This read-only attribute returns the version assigned to this document. Documents created by [SodaDatabase.createDocument\(\)](#) or fetched from collections where this attribute is not stored will return None.

New in version 7.0.

## 2.10.4 SODA Document Cursor Object

---

**Note:** This object is an extension the DB API. It is returned by the method [SodaOperation.getCursor\(\)](#) and implements the iterator protocol. Each iteration will return a [SODA document object](#).

---

`SodaDocCursor.close()`

Close the cursor now, rather than whenever `__del__` is called. The cursor will be unusable from this point forward; an Error exception will be raised if any operation is attempted with the cursor.

New in version 7.0.

## 2.10.5 SODA Operation Object

---

**Note:** This object is an extension to the DB API. It represents an operation that will be performed on all or some of the documents in a SODA collection. It is created by the method `SodaCollection.find()`.

---

`SodaOperation.count()`

Returns a count of the number of documents in the collection that match the criteria. If `skip()` or `limit()` were called on this object, an exception is raised.

New in version 7.0.

`SodaOperation.filter(value)`

Sets a filter specification for complex document queries and ordering of JSON documents. Filter specifications must be provided as a dictionary or JSON-encoded string and can include comparisons, regular expressions, logical and spatial operators, among others. See the [overview of SODA filter specifications](#) for more information.

As a convenience, the `SodaOperation` object is returned so that further criteria can be specified by chaining methods together.

New in version 7.0.

`SodaOperation.getCursor()`

Returns a *SODA Document Cursor object* that can be used to iterate over the documents that match the criteria.

New in version 7.0.

`SodaOperation.getDocuments()`

Returns a list of *SODA Document objects* that match the criteria.

New in version 7.0.

`SodaOperation.getOne()`

Returns a single *SODA Document object* that matches the criteria. Note that if multiple documents match the criteria only the first one is returned.

New in version 7.0.

`SodaOperation.key(value)`

Specifies that the document with the specified key should be returned. This causes any previous calls made to this method and `keys()` to be ignored.

As a convenience, the `SodaOperation` object is returned so that further criteria can be specified by chaining methods together.

New in version 7.0.

`SodaOperation.keys(seq)`

Specifies that documents that match the keys found in the supplied sequence should be returned. This causes any previous calls made to this method and `key()` to be ignored.

As a convenience, the `SodaOperation` object is returned so that further criteria can be specified by chaining methods together.



New in version 7.0.

`SodaOperation.limit (value)`

Specifies that only the specified number of documents should be returned. This method is only usable for read operations such as `getCursor()` and `getDocuments()`. For write operations, any value set using this method is ignored.

As a convenience, the `SodaOperation` object is returned so that further criteria can be specified by chaining methods together.

New in version 7.0.

`SodaOperation.remove ()`

Removes all of the documents in the collection that match the criteria. The number of documents that have been removed is returned.

New in version 7.0.

`SodaOperation.replaceOne (doc)`

Replaces a single document in the collection with the specified document. The input document can be a dictionary or list or an existing *SODA document object*. A boolean indicating if a document was replaced or not is returned.

Currently the method `key()` must be called before this method can be called.

New in version 7.0.

`SodaOperation.replaceOneAndGet (doc)`

Similarly to `replaceOne()`, this method replaces a single document in the collection with the specified document. The only difference is that it returns a *SODA document object*. Note that for performance reasons the returned document does not contain the content.

New in version 7.0.

`SodaOperation.skip (value)`

Specifies the number of documents that match the other criteria that will be skipped. This method is only usable for read operations such as `getCursor()` and `getDocuments()`. For write operations, any value set using this method is ignored.

As a convenience, the `SodaOperation` object is returned so that further criteria can be specified by chaining methods together.

New in version 7.0.

`SodaOperation.version (value)`

Specifies that documents with the specified version should be returned. Typically this is used with `key()` to implement optimistic locking, so that the write operation called later does not affect a document that someone else has modified.

As a convenience, the `SodaOperation` object is returned so that further criteria can be specified by chaining methods together.

New in version 7.0.



## CHAPTER 3

---

### Indices and tables

---

- `genindex`
- `modindex`
- `search`



**C**

`cx_Oracle`, [85](#)



## Symbols

\_\_enter\_\_() (Connection method), 99  
 \_\_enter\_\_() (Cursor method), 108  
 \_\_exit\_\_() (Connection method), 99  
 \_\_exit\_\_() (Cursor method), 108  
 \_\_future\_\_ (in module cx\_Oracle), 85  
 \_\_iter\_\_() (Cursor method), 112  
 \_\_version\_\_ (in module cx\_Oracle), 89

## A

acquire() (SessionPool method), 115  
 action (Connection attribute), 99  
 actualElements (Variable attribute), 115  
 apilevel (in module cx\_Oracle), 88  
 append() (Object method), 122  
 arraysize (Cursor attribute), 108  
 arrayvar() (Cursor method), 108  
 asdict() (Object method), 122  
 aslist() (Object method), 122  
 attempts (MessageProperties attribute), 125  
 ATTR\_PURITY\_DEFAULT (in module cx\_Oracle), 94  
 ATTR\_PURITY\_NEW (in module cx\_Oracle), 94  
 ATTR\_PURITY\_SELF (in module cx\_Oracle), 94  
 attributes (ObjectType attribute), 121  
 autocommit (Connection attribute), 100

## B

begin() (Connection method), 100  
 BFILE (in module cx\_Oracle), 95  
 BINARY (in module cx\_Oracle), 95  
 Binary() (in module cx\_Oracle), 85  
 bindarraysize (Cursor attribute), 108  
 bindnames() (Cursor method), 108  
 bindvars (Cursor attribute), 108  
 BLOB (in module cx\_Oracle), 95  
 BOOLEAN (in module cx\_Oracle), 96  
 bufferSize (Variable attribute), 115  
 buildtime (in module cx\_Oracle), 88  
 busy (SessionPool attribute), 116

## C

callback (Subscription attribute), 117  
 callfunc() (Cursor method), 109  
 callproc() (Cursor method), 109  
 callTimeout (Connection attribute), 100  
 cancel() (Connection method), 100  
 changepassword() (Connection method), 100  
 client\_identifier (Connection attribute), 100  
 clientinfo (Connection attribute), 100  
 clientversion() (in module cx\_Oracle), 85  
 CLOB (in module cx\_Oracle), 96  
 close() (Connection method), 101  
 close() (Cursor method), 109  
 close() (LOB method), 120  
 close() (SessionPool method), 116  
 close() (SodaDocCursor method), 129  
 code (cx\_Oracle.\_Error attribute), 99  
 commit() (Connection method), 101  
 condition (DeqOptions attribute), 124  
 connect() (in module cx\_Oracle), 85  
 connection (Cursor attribute), 109  
 connection (Queue attribute), 123  
 connection (Subscription attribute), 117  
 Connection() (in module cx\_Oracle), 85  
 consumername (DeqOptions attribute), 124  
 consumerName (Message attribute), 118  
 context (cx\_Oracle.\_Error attribute), 99  
 copy() (Object method), 122  
 correlation (DeqOptions attribute), 124  
 correlation (MessageProperties attribute), 125  
 count() (SodaOperation method), 130  
 createCollection() (SodaDatabase method), 126  
 createDocument() (SodaDatabase method), 126  
 createdOn (SodaDoc attribute), 128  
 createIndex() (SodaCollection method), 127  
 createlob() (Connection method), 101  
 current\_schema (Connection attribute), 101  
 CURSOR (in module cx\_Oracle), 96  
 cursor() (Connection method), 101

Cursor() (in module cx\_Oracle), 86  
 Cursor.description (built-in variable), 109  
 Cursor.lastrowid (built-in variable), 112  
 cx\_Oracle (module), 85

## D

DatabaseError, 98  
 DataError, 98  
 Date() (in module cx\_Oracle), 86  
 DateFromTicks() (in module cx\_Oracle), 86  
 DATETIME (in module cx\_Oracle), 96  
 dbname (Message attribute), 118  
 dbop (Connection attribute), 101  
 DBSHUTDOWN\_ABORT (in module cx\_Oracle), 92  
 DBSHUTDOWN\_FINAL (in module cx\_Oracle), 92  
 DBSHUTDOWN\_IMMEDIATE (in module cx\_Oracle), 92  
 DBSHUTDOWN\_TRANSACTIONAL (in module cx\_Oracle), 92  
 DBSHUTDOWN\_TRANSACTIONAL\_LOCAL (in module cx\_Oracle), 92  
 DEFAULT\_AUTH (in module cx\_Oracle), 91  
 delay (MessageProperties attribute), 125  
 delete() (Object method), 122  
 deliverymode (DeqOptions attribute), 124  
 deliverymode (EnqOptions attribute), 124  
 deliverymode (MessageProperties attribute), 125  
 deq() (Connection method), 101  
 DEQ\_BROWSE (in module cx\_Oracle), 89  
 DEQ\_FIRST\_MSG (in module cx\_Oracle), 90  
 DEQ\_IMMEDIATE (in module cx\_Oracle), 90  
 DEQ\_LOCKED (in module cx\_Oracle), 89  
 DEQ\_NEXT\_MSG (in module cx\_Oracle), 90  
 DEQ\_NEXT\_TRANSACTION (in module cx\_Oracle), 90  
 DEQ\_NO\_WAIT (in module cx\_Oracle), 90  
 DEQ\_ON\_COMMIT (in module cx\_Oracle), 90  
 DEQ\_REMOVE (in module cx\_Oracle), 89  
 DEQ\_REMOVE\_NODATA (in module cx\_Oracle), 89  
 DEQ\_WAIT\_FOREVER (in module cx\_Oracle), 90  
 deqMany() (Queue method), 123  
 deqOne() (Queue method), 123  
 deqOptions (Queue attribute), 123  
 deqoptions() (Connection method), 101  
 drop() (SessionPool method), 116  
 drop() (SodaCollection method), 127  
 dropIndex() (SodaCollection method), 127  
 dsn (Connection attribute), 102  
 dsn (SessionPool attribute), 116

## E

edition (Connection attribute), 102  
 encoding (Connection attribute), 102  
 enq() (Connection method), 102  
 ENQ\_IMMEDIATE (in module cx\_Oracle), 90  
 ENQ\_ON\_COMMIT (in module cx\_Oracle), 90

enqMany() (Queue method), 123  
 enqOne() (Queue method), 123  
 enqOptions (Queue attribute), 123  
 enqoptions() (Connection method), 102  
 enqtime (MessageProperties attribute), 125  
 Error, 98  
 EVENT\_AQ (in module cx\_Oracle), 92  
 EVENT\_DEREG (in module cx\_Oracle), 92  
 EVENT\_NONE (in module cx\_Oracle), 92  
 EVENT\_OBJCHANGE (in module cx\_Oracle), 92  
 EVENT\_QUERYCHANGE (in module cx\_Oracle), 92  
 EVENT\_SHUTDOWN (in module cx\_Oracle), 93  
 EVENT\_SHUTDOWN\_ANY (in module cx\_Oracle), 93  
 EVENT\_STARTUP (in module cx\_Oracle), 93  
 exceptionq (MessageProperties attribute), 125  
 execute() (Cursor method), 109  
 executemany() (Cursor method), 110  
 executemanyprepared() (Cursor method), 110  
 exists() (Object method), 122  
 expiration (MessageProperties attribute), 125  
 extend() (Object method), 122  
 external\_name (Connection attribute), 102

## F

fetchall() (Cursor method), 110  
 fetchmany() (Cursor method), 111  
 fetchone() (Cursor method), 111  
 fetchrow() (Cursor method), 111  
 fetchvars (Cursor attribute), 111  
 fileexists() (LOB method), 120  
 filter() (SodaOperation method), 130  
 find() (SodaCollection method), 127  
 first() (Object method), 122  
 FIXED\_CHAR (in module cx\_Oracle), 96  
 FIXED\_NCHAR (in module cx\_Oracle), 96

## G

getarraydmlrowcounts() (Cursor method), 111  
 getbatcherrors() (Cursor method), 111  
 getchunksize() (LOB method), 120  
 getCollectionNames() (SodaDatabase method), 127  
 getContent() (SodaDoc method), 129  
 getContentAsBytes() (SodaDoc method), 129  
 getContentAsString() (SodaDoc method), 129  
 getCursor() (SodaOperation method), 130  
 getDataGuide() (SodaCollection method), 127  
 getDocuments() (SodaOperation method), 130  
 getelement() (Object method), 122  
 getfilename() (LOB method), 120  
 getimplicitresults() (Cursor method), 112  
 getOne() (SodaOperation method), 130  
 getSodaDatabase() (Connection method), 103  
 gettype() (Connection method), 103



getValue() (Variable method), 115

## H

handle (Connection attribute), 103

homogeneous (SessionPool attribute), 116

## I

id (MessageQuery attribute), 120

id (Subscription attribute), 118

inconverter (Variable attribute), 115

increment (SessionPool attribute), 116

inputtypehandler (Connection attribute), 103

inputtypehandler (Cursor attribute), 112

insertMany() (SodaCollection method), 128

insertManyAndGet() (SodaCollection method), 128

insertOne() (SodaCollection method), 128

insertOneAndGet() (SodaCollection method), 128

IntegrityError, 98

InterfaceError, 98

internal\_name (Connection attribute), 103

InternalError, 98

INTERVAL (in module cx\_Oracle), 96

ipAddress (Subscription attribute), 118

iscollection (ObjectType attribute), 121

isopen() (LOB method), 120

isrecoverable (cx\_Oracle.\_Error attribute), 99

## K

key (SodaDoc attribute), 129

key() (SodaOperation method), 130

keys() (SodaOperation method), 130

## L

last() (Object method), 122

lastModified (SodaDoc attribute), 129

limit() (SodaOperation method), 131

LOB (in module cx\_Oracle), 96

LONG\_BINARY (in module cx\_Oracle), 97

LONG\_STRING (in module cx\_Oracle), 97

ltxid (Connection attribute), 103

## M

makedsn() (in module cx\_Oracle), 87

max (SessionPool attribute), 116

max\_lifetime\_session (SessionPool attribute), 116

maxBytesPerCharacter (Connection attribute), 104

mediaType (SodaDoc attribute), 129

message (cx\_Oracle.\_Error attribute), 99

metadata (SodaCollection attribute), 128

min (SessionPool attribute), 116

mode (DeqOptions attribute), 124

module (Connection attribute), 104

MSG\_BUFFERED (in module cx\_Oracle), 89

MSG\_EXPIRED (in module cx\_Oracle), 91

MSG\_NO\_DELAY (in module cx\_Oracle), 91

MSG\_NO\_EXPIRATION (in module cx\_Oracle), 91

MSG\_PERSISTENT (in module cx\_Oracle), 89

MSG\_PERSISTENT\_OR\_BUFFERED (in module cx\_Oracle), 89

MSG\_PROCESSED (in module cx\_Oracle), 91

MSG\_READY (in module cx\_Oracle), 91

MSG\_WAITING (in module cx\_Oracle), 91

msgid (DeqOptions attribute), 124

msgid (MessageProperties attribute), 125

msgproperties() (Connection method), 104

## N

name (MessageTable attribute), 119

name (ObjectType attribute), 121

name (Queue attribute), 123

name (SessionPool attribute), 117

name (SodaCollection attribute), 128

name (Subscription attribute), 118

namespace (Subscription attribute), 118

NATIVE\_FLOAT (in module cx\_Oracle), 97

NATIVE\_INT (in module cx\_Oracle), 97

navigation (DeqOptions attribute), 124

NCHAR (in module cx\_Oracle), 97

NCLOB (in module cx\_Oracle), 97

nencoding (Connection attribute), 104

newobject() (ObjectType method), 121

next() (Object method), 122

NotSupportedError, 98

NUMBER (in module cx\_Oracle), 97

numElements (Variable attribute), 115

## O

OBJECT (in module cx\_Oracle), 97

ObjectType(), 121

offset (cx\_Oracle.\_Error attribute), 99

OPCODE\_ALLOPS (in module cx\_Oracle), 93

OPCODE\_ALLROWS (in module cx\_Oracle), 93

OPCODE\_ALTER (in module cx\_Oracle), 93

OPCODE\_DELETE (in module cx\_Oracle), 93

OPCODE\_DROP (in module cx\_Oracle), 93

OPCODE\_INSERT (in module cx\_Oracle), 93

OPCODE\_UPDATE (in module cx\_Oracle), 93

open() (LOB method), 120

openCollection() (SodaDatabase method), 127

opened (SessionPool attribute), 117

operation (MessageQuery attribute), 120

operation (MessageRow attribute), 120

operation (MessageTable attribute), 119

OperationalError, 98

operations (Subscription attribute), 118

outconverter (*Variable attribute*), 115  
 outputtypehandler (*Connection attribute*), 104  
 outputtypehandler (*Cursor attribute*), 112

## P

paramstyle (*in module cx\_Oracle*), 88  
 parse() (*Cursor method*), 112  
 payload (*MessageProperties attribute*), 125  
 payloadType (*Queue attribute*), 123  
 ping() (*Connection method*), 104  
 port (*Subscription attribute*), 118  
 PRELIM\_AUTH (*in module cx\_Oracle*), 91  
 prepare() (*Connection method*), 104  
 prepare() (*Cursor method*), 113  
 prev() (*Object method*), 122  
 priority (*MessageProperties attribute*), 125  
 ProgrammingError, 98  
 protocol (*Subscription attribute*), 118

## Q

qos (*Subscription attribute*), 118  
 queries (*Message attribute*), 119  
 queue() (*Connection method*), 105  
 queueName (*Message attribute*), 119

## R

read() (*LOB method*), 121  
 registered (*Message attribute*), 119  
 registerquery() (*Subscription method*), 118  
 release() (*SessionPool method*), 117  
 remove() (*SodaOperation method*), 131  
 replaceOne() (*SodaOperation method*), 131  
 replaceOneAndGet() (*SodaOperation method*), 131  
 rollback() (*Connection method*), 105  
 rowcount (*Cursor attribute*), 113  
 rowfactory (*Cursor attribute*), 113  
 ROWID (*in module cx\_Oracle*), 97  
 rowid (*MessageRow attribute*), 120  
 rows (*MessageTable attribute*), 119

## S

schema (*ObjectType attribute*), 121  
 scroll() (*Cursor method*), 113  
 scrollable (*Cursor attribute*), 113  
 SessionPool() (*in module cx\_Oracle*), 87  
 setelement() (*Object method*), 122  
 setfilename() (*LOB method*), 121  
 setinputsizes() (*Cursor method*), 113  
 setoutputsize() (*Cursor method*), 114  
 setvalue() (*Variable method*), 115  
 shutdown() (*Connection method*), 105  
 size (*Variable attribute*), 115  
 size() (*LOB method*), 121

size() (*Object method*), 122  
 skip() (*SodaOperation method*), 131  
 SPOOL\_ATTRVAL\_FORCEGET (*in module cx\_Oracle*), 93  
 SPOOL\_ATTRVAL\_NOWAIT (*in module cx\_Oracle*), 93  
 SPOOL\_ATTRVAL\_TIMEDWAIT (*in module cx\_Oracle*), 93  
 SPOOL\_ATTRVAL\_WAIT (*in module cx\_Oracle*), 93  
 startup() (*Connection method*), 105  
 state (*MessageProperties attribute*), 126  
 statement (*Cursor attribute*), 114  
 stmtcachesize (*Connection attribute*), 105  
 stmtcachesize (*SessionPool attribute*), 117  
 STRING (*in module cx\_Oracle*), 98  
 SUBSCR\_GROUPING\_CLASS\_TIME (*in module cx\_Oracle*), 94  
 SUBSCR\_GROUPING\_TYPE\_LAST (*in module cx\_Oracle*), 94  
 SUBSCR\_GROUPING\_TYPE\_SUMMARY (*in module cx\_Oracle*), 94  
 SUBSCR\_NAMESPACE\_AQ (*in module cx\_Oracle*), 94  
 SUBSCR\_NAMESPACE\_DBCHANGE (*in module cx\_Oracle*), 94  
 SUBSCR\_PROTO\_HTTP (*in module cx\_Oracle*), 95  
 SUBSCR\_PROTO\_MAIL (*in module cx\_Oracle*), 95  
 SUBSCR\_PROTO\_OCI (*in module cx\_Oracle*), 95  
 SUBSCR\_PROTO\_SERVER (*in module cx\_Oracle*), 95  
 SUBSCR\_QOS\_BEST\_EFFORT (*in module cx\_Oracle*), 95  
 SUBSCR\_QOS\_DEREG\_NFY (*in module cx\_Oracle*), 95  
 SUBSCR\_QOS\_QUERY (*in module cx\_Oracle*), 95  
 SUBSCR\_QOS\_RELIABLE (*in module cx\_Oracle*), 95  
 SUBSCR\_QOS\_ROWIDS (*in module cx\_Oracle*), 95  
 subscribe() (*Connection method*), 106  
 subscription (*Message attribute*), 119  
 SYSASM (*in module cx\_Oracle*), 91  
 SYSBKP (*in module cx\_Oracle*), 91  
 SYSDBA (*in module cx\_Oracle*), 91  
 SYSDGD (*in module cx\_Oracle*), 91  
 SYSKMT (*in module cx\_Oracle*), 91  
 SYSOPER (*in module cx\_Oracle*), 92  
 SYSRAC (*in module cx\_Oracle*), 92

## T

tables (*Message attribute*), 119  
 tables (*MessageQuery attribute*), 120  
 tag (*Connection attribute*), 107  
 threadsafety (*in module cx\_Oracle*), 89  
 Time() (*in module cx\_Oracle*), 88  
 TimeFromTicks() (*in module cx\_Oracle*), 88  
 timeout (*SessionPool attribute*), 117  
 timeout (*Subscription attribute*), 118  
 TIMESTAMP (*in module cx\_Oracle*), 98  
 Timestamp() (*in module cx\_Oracle*), 88

[TimestampFromTicks\(\)](#) (*in module cx\_Oracle*), 88  
[tnsentry](#) (*Connection attribute*), 107  
[tnsentry](#) (*SessionPool attribute*), 117  
[transformation](#) (*DeqOptions attribute*), 124  
[transformation](#) (*EnqOptions attribute*), 125  
[trim\(\)](#) (*LOB method*), 121  
[trim\(\)](#) (*Object method*), 122  
[txid](#) (*Message attribute*), 119  
[type](#) (*Message attribute*), 119  
[type](#) (*Variable attribute*), 115

## U

[unsubscribe\(\)](#) (*Connection method*), 107  
[username](#) (*Connection attribute*), 107  
[username](#) (*SessionPool attribute*), 117

## V

[values](#) (*Variable attribute*), 115  
[var\(\)](#) (*Cursor method*), 114  
[version](#) (*Connection attribute*), 107  
[version](#) (*in module cx\_Oracle*), 89  
[version](#) (*SodaDoc attribute*), 129  
[version\(\)](#) (*SodaOperation method*), 131  
[visibility](#) (*DeqOptions attribute*), 124  
[visibility](#) (*EnqOptions attribute*), 125

## W

[wait](#) (*DeqOptions attribute*), 124  
[wait\\_timeout](#) (*SessionPool attribute*), 117  
[Warning](#), 98  
[write\(\)](#) (*LOB method*), 121